


Service Manual

Pioneer

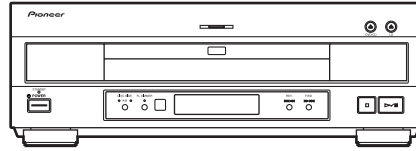

ORDER NO.
RRV2089

DVD LD PLAYER

DVL-919

THIS MANUAL IS APPLICABLE TO THE FOLLOWING MODEL(S) AND TYPE(S).

Type	Model	Power Requirement	Region No.	The voltage can be converted by the following method.
	DVL-919			
KU/CA	○	AC120V	1	_____
RD/RA	○	AC110-127/220-240V	1	Automatic select

CONTENTS

1. SAFETY INFORMATION	2	7. GENERAL INFORMATION	80
2. EXPLODED VIEWS AND PARTS LIST	4	7.1 PARTS	80
3. SCHEMATIC DIAGRAM	16	7.1.1 IC	80
4. PCB CONNECTION DIAGRAM	42	7.2 DISASSEMBLY/ASSEMBLY	82
5. PCB PARTS LIST	58	7.3 BLOCK DIAGRAM	84
6. ADJUSTMENT	65	8. PANEL FACILITIES AND SPECIFICATIONS	86

PIONEER ELECTRONIC CORPORATION 4-1, Meguro 1-Chome, Meguro-ku, Tokyo 153-8654, Japan
PIONEER ELECTRONICS SERVICE, INC. P.O. Box 1760, Long Beach, CA 90801-1760, U.S.A.
PIONEER ELECTRONIC (EUROPE) N.V. Haven 1087, Keetberglaan 1, 9120 Melsele, Belgium
PIONEER ELECTRONICS ASIACENTRE PTE. LTD. 253 Alexandra Road, #04-01, Singapore 159936
 © PIONEER ELECTRONIC CORPORATION 1999

1. SAFETY INFORMATION

This service manual is intended for qualified service technicians ; it is not meant for the casual do-it-yourselfer. Qualified technicians have the necessary test equipment and tools, and have been trained to properly and safely repair complex products such as those covered by this manual. Improperly performed repairs can adversely affect the safety and reliability of the product and may void the warranty. If you are not qualified to perform the repair of this product properly and safely, you should not risk trying to do so and refer the repair to a qualified service technician.



WARNING

This product contains lead in solder and certain electrical parts contain chemicals which are known to the state of California to cause cancer, birth defects or other reproductive harm.

Health & Safety Code Section 25249.6 – Proposition 65



NOTICE

(FOR CANADIAN MODEL ONLY)

Fuse symbols  (fast operating fuse) and/or  (slow operating fuse) on PCB indicate that replacement parts must be of identical designation.

REMARQUE

(POUR MODÈLE CANADIEN SEULEMENT)

Les symboles de fusible  (fusible de type rapide) et/ou  (fusible de type lent) sur CCI indiquent que les pièces de remplacement doivent avoir la même désignation.


(FOR USA MODEL ONLY)

1. SAFETY PRECAUTIONS

The following check should be performed for the continued protection of the customer and service technician.

LEAKAGE CURRENT CHECK

Measure leakage current to a known earth ground (water pipe, conduit, etc.) by connecting a leakage current tester such as Simpson Model 229-2 or equivalent between the earth ground and all exposed metal parts of the appliance (input/output terminals, screwheads, metal overlays, control shaft, etc.). Plug the AC line cord of the appliance directly into a 120V AC 60Hz outlet and turn the AC power switch on. Any current measured must not exceed 0.5mA.

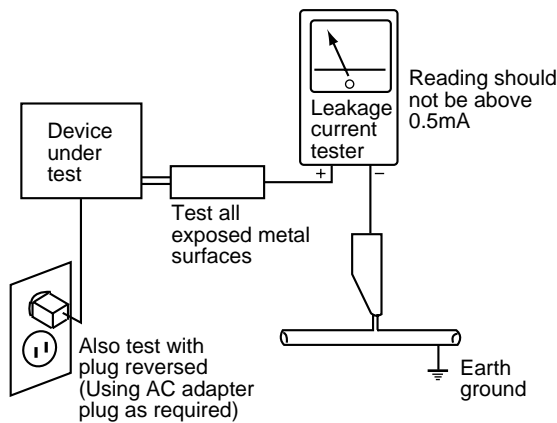

AC Leakage Test

ANY MEASUREMENTS NOT WITHIN THE LIMITS OUTLINED ABOVE ARE INDICATIVE OF A POTENTIAL SHOCK HAZARD AND MUST BE CORRECTED BEFORE RETURNING THE APPLIANCE TO THE CUSTOMER.

2. PRODUCT SAFETY NOTICE

Many electrical and mechanical parts in the appliance have special safety related characteristics. These are often not evident from visual inspection nor the protection afforded by them necessarily can be obtained by using replacement components rated for voltage, wattage, etc. Replacement parts which have these special safety characteristics are identified in this Service Manual.

Electrical components having such features are identified by marking with a Δ on the schematics and on the parts list in this Service Manual.

The use of a substitute replacement component which does not have the same safety characteristics as the PIONEER recommended replacement one, shown in the parts list in this Service Manual, may create shock, fire, or other hazards.

Product Safety is continuously under review and new instructions are issued from time to time. For the latest information, always consult the current PIONEER Service Manual. A subscription to, or additional copies of, PIONEER Service Manual may be obtained at a nominal charge from PIONEER.

— IMPORTANT —

THIS PIONEER APPARATUS CONTAINS LASER OF CLASS 1. SERVICING OPERATION OF THE APPARATUS SHOULD BE DONE BY A SPECIALLY INSTRUCTED PERSON.

— LASER DIODE CHARACTERISTICS —

•FOR DVD
 MAXIMUM OUTPUT POWER : 7 mW
 WAVELENGTH : 650 nm

•FOR CD/LD
 MAXIMUM OUTPUT POWER : 5 mW
 WAVELENGTH : 780-785 nm

— Additional Laser Caution —


1. The ON/OFF statuses of the side-A/B detection switch (Lever switch connecting to the TNMB assy), slider-position detection switches (INNER and OUTER on the PKSB assy), loading-status detection switches (SW1, 2 and 3 on the LM5B assy), side B inside detection switch (S901 on the B15B assy) and CLD pickup active detection switch (S903 on the LCSB assy) are detected by the microprocessor (IC101 in the CLDM assy). Also the DVD pickup active detection switch (S902 on the DCSB assy) is detected by the microprocessor (IC501 in the DVDM assy).
 - To permit the laser diode of CLD pickup to oscillate, it is required to set the CLD pickup active detection switch (S903 : OFF) and the slider-position detection switches for the LD ACTIVE status (INNER : OFF, OUTER: OFF), and to set the loading-status detection switches for tilt neutral state (SW1 : ON, SW2 : OFF, SW3 : ON). As long as these requirements are not satisfied, the laser diode will not oscillate. When the requirements are met in any way, the laser diode can oscillate. The laser diode oscillation will continue if pin 13 of IC801 is shorted to GND or the emitter and collector of Q834 are shorted each other (fault condition) in the CLDM assy.
 - To permit the laser diode of DVD pickup to oscillate, it is required to set the DVD pickup active detection switch (S902 :OFF) and each switch and a state of laser diode are contents same as state of CLD pickup mentioned above. The laser diode oscillation will continue if pin 13 of IC101 is shorted to +5V (fault condition) in the DVDM assy. In the test mode *, the laser diode oscillates when the microprocessor detects a PLAY signal, or when the PLAY key is pressed (S104 ON in the FLKY assy), with the above requirements satisfied.
2. When the cover is open, close viewing through the objective lens with the naked eye will cause exposure to a Class 1 laser beam.

* : Refer to page 68.

2. EXPLODED VIEWS AND PARTS LIST

- NOTES: ● Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.
 ● The Δ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.
 ● Screws adjacent to \blacktriangledown mark on product are used for disassembly.

2.1 PACKING

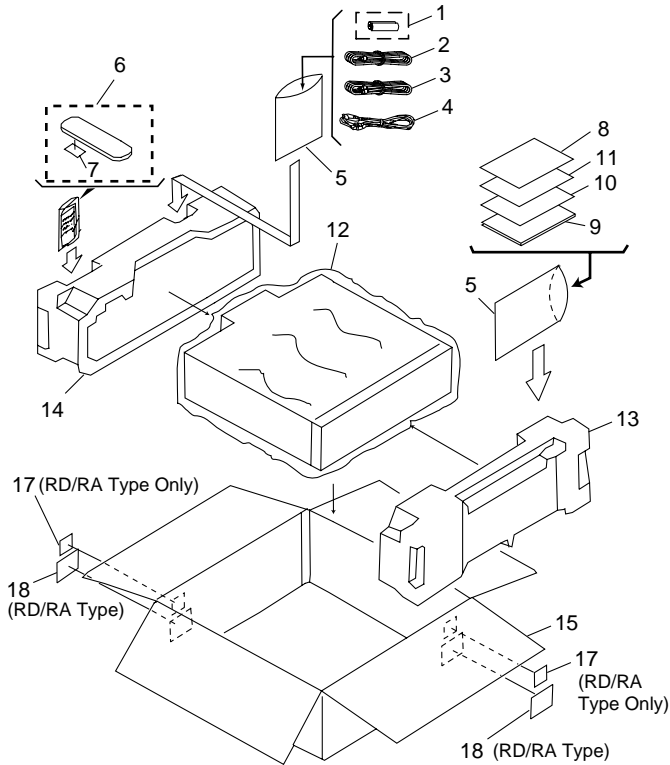

(1) PACKING PARTS LIST


Mark	No.	Description	Part No.
NSP	1	DRY CELL BATTERY(R6P,AA)	VEM-013
	2	VIDEO CORD(L=1.5m)	VDE1036
	3	AUDIO CORD(L=1.5m)	VDE1033
Δ	4	POWER CORD	See Contrast table (2)
	5	POLYETHYLENE BAG	Z21-038
	6	REMOTE CONTROL UNIT (CU-DV030)	VXX2609
	7	BATTERY COVER	VNK3703
NSP	8	CAUTION	VRM1063
	9	OPERATING INSTRUCTIONS (English/French)	VRB1202
	10	ERRATA	VRX1031
NSP	11	WARRANTY CARD	See Contrast table (2)
	12	MIRROR MAT SHEET	VHL1018
	13	PAD F	VHA1226
	14	PAD R	VHA1227
	15	PACKING CASE	See Contrast table (2)
	16	•••••	
	17	REGION LABEL P1	See Contrast table (2)
	18	RD/RA LABEL	See Contrast table (2)

(2) CONTRAST TABLE

DVL-919/KU/CA and RD/RA are constructed the same except for the following :

Mark	No.	Symbol and Description	Part No.		Remarks
			KU/CA type	RD/RA type	
Δ	4	POWER CORD	ADG7021	ADG7003	
NSP	11	WARRANTY CARD	ARY7023	ARY7025	
	15	PACKING CASE	VHG1768	VHG1770	
	17	REGION LABEL P1	Not used	VRW1708	
	18	RD/RA LABEL	Not used	VRW1711	

2.2 EXTERIOR SECTION

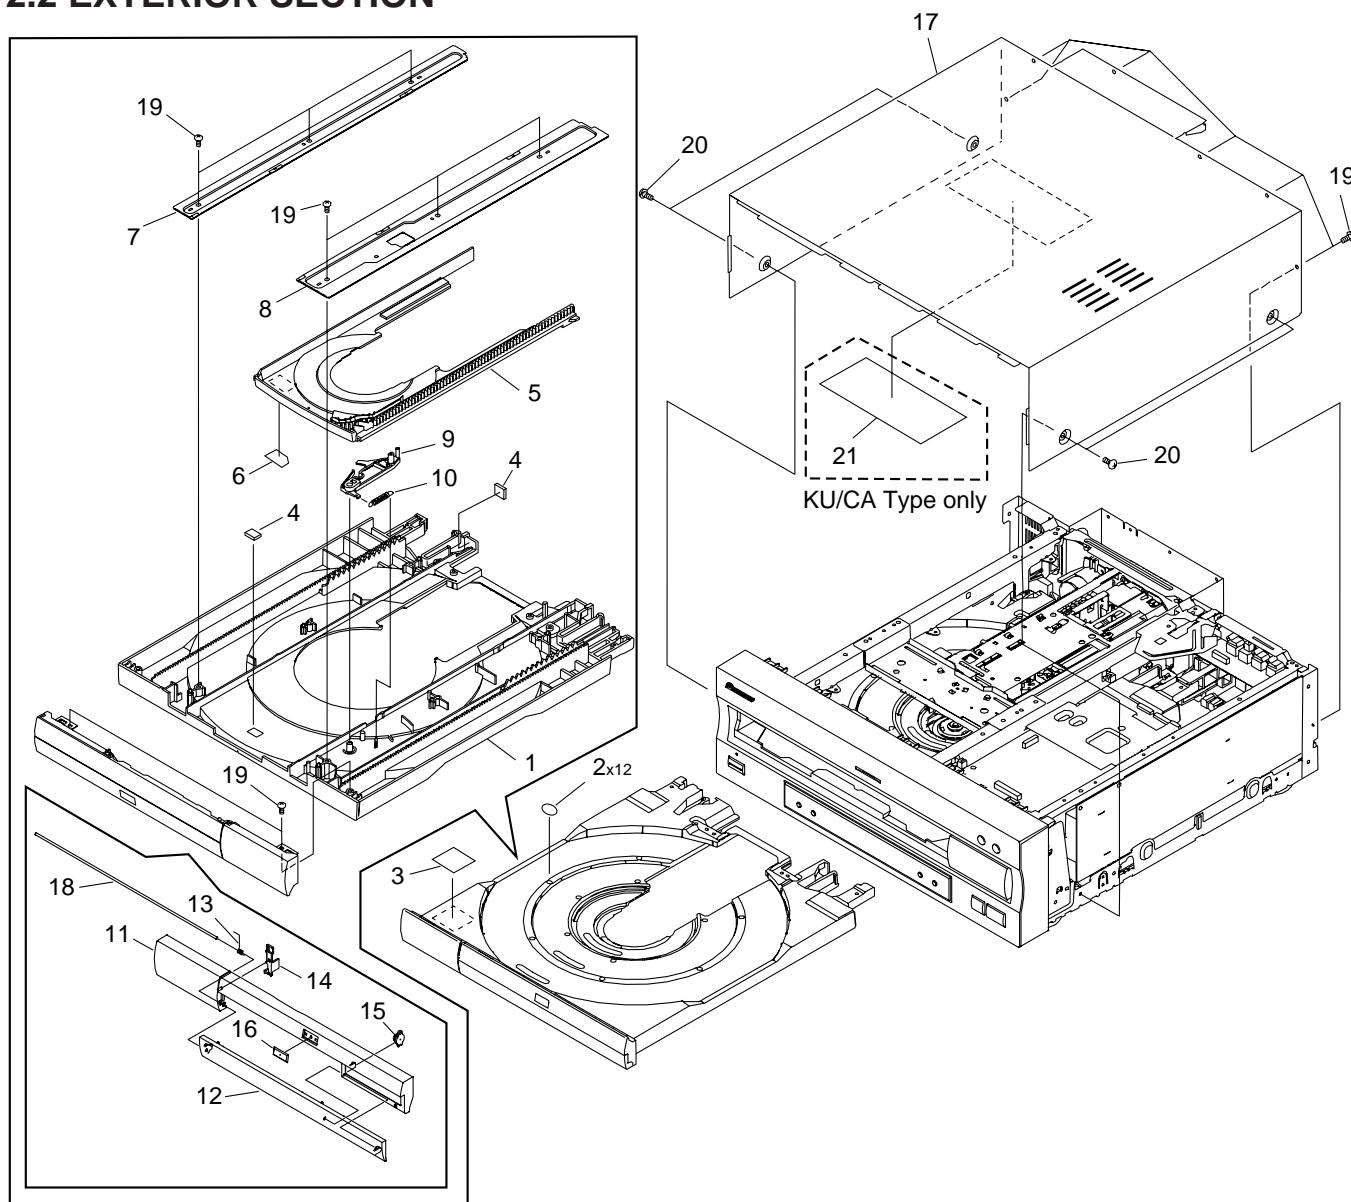

(1) EXTERIOR SECTION PARTS LIST


Mark	No.	Description	Part No.	Mark	No.	Description	Part No.
	1	LD TRAY ASSY	VXA2173		11	TRAY PANEL	VNK4355
	2	CUSHION	VEC1682		12	DVD DOOR	VNK4356
NSP	3	CARRY LABEL	VRW1289		13	DOOR SPRING	VBH1248
	4	DAMP CUSHION	VEC1683		14	DOOR HOLDER	VNL1817
	5	CD TRAY	VNK3922		15	DAMPER ASSY	VXA1999
	6	TRAY LABEL	VRW1628		16	DVD PLATE	VAM1075
	7	GUIDE PLATE (R)	VNE1939		17	BONNET CASE S	VXX2561
	8	GUIDE PLATE (L)	VNE1938		18	DOOR SHAFT	VLL1506
	9	LOCK PLATE	VNL1703		19	SCREW	BBZ30P080FMC
	10	LOCK PLATE SPRING	VBH1188		20	SCREW	BCZ40P060FZK
					21	65 LABEL	See Contrast table (2)

(2) CONTRAST TABLE

DVL-919/KU/CA and RD/RA are constructed the same except for the following :

Mark	No.	Symbol and Description	Part No.		Remarks
			KU/CA type	RD/RA type	
	21	65 LABEL	ARW7050	Not used	


2.3 FRONT PANEL SECTION

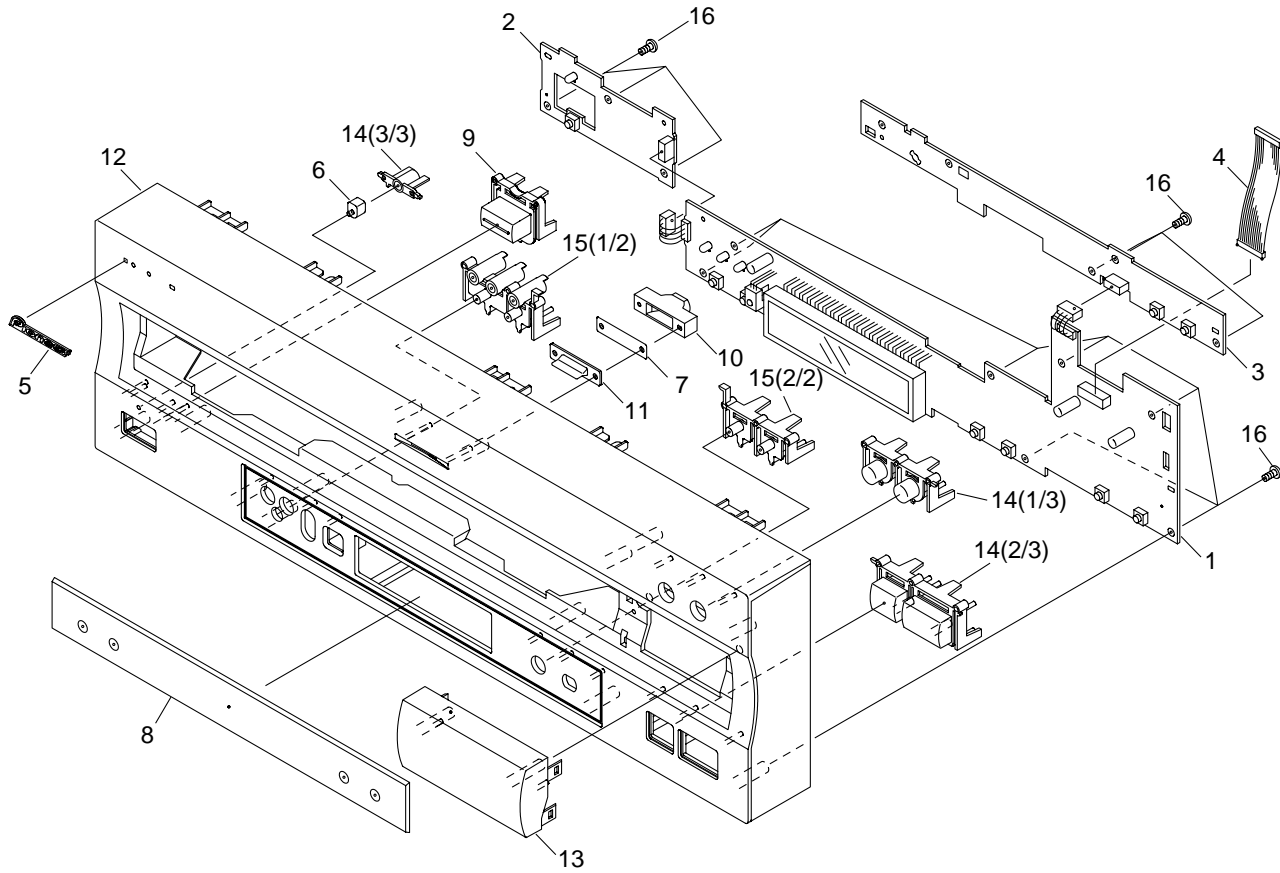

● FRONT PANEL SECTION PARTS LIST

Mark	No.	Description	Part No.	Mark	No.	Description	Part No.
	1	FLKY ASSY	VWG2005		11	ILLUMINATION LENS	VNK4168
NSP	2	PWSB ASSY	VWG1994		12	FRONT PANEL	VNK4352
NSP	3	DILB ASSY	VWG1995		13	SUB PANEL	VNK4415
	4	FLEXIBLE CABLE (14P)	VDA1638		14	PLAY BUTTON	VNK4354
	5	NAME PLATE	PAM1776		15	OPERATION BUTTON	VNK4349
	6	LED LENS	PNW2019		16	SCREW	BBZ30P080FMC
	7	ILLUMINATION FILTER	VEC1950				
	8	FL LENS	VEC2015				
	9	POWER BUTTON	VNK4101				
	10	ILLUMI HOLDER	VNK4098				

2.4 TOP VIEW SECTION

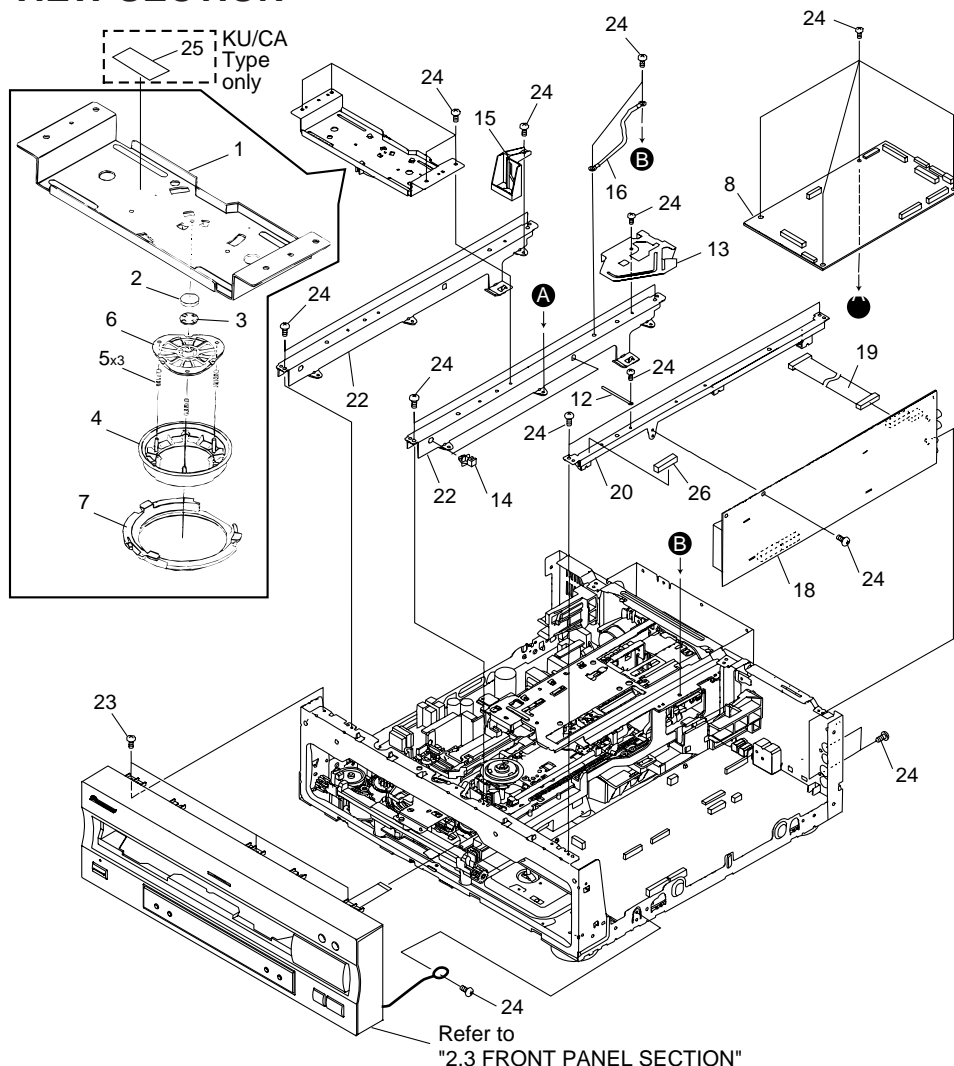

(1) TOP VIEW SECTION PARTS LIST


Mark	No.	Description	Part No.	Mark	No.	Description	Part No.
	1	CENTER PLATE	VNE2127	NSP	14	CORNER POST	DEC1212
	2	RUBBER MAT	VEB1114		15	SHIPPING CAM	VNL1729
	3	THRUST HOLDER	VNL1663	NSP	16	CORD WITH PLUG	DE007VF0
	4	CLAMPER	VNL1648		17	•••••	
	5	CLAMPER SPRING	VBH1192		18	GYCB ASSY	VWV1633
	6	CLAMPER HEAD	VNL1649		19	HOUSING ASSY(13P)	VKP2196
	7	CLAMPER HOLDER	VNL1788	NSP	20	PCB-HOLDER	VNE2164
	8	DVDM ASSY	VWS1377		21	•••••	
	9	•••••		NSP	22	CENTER ANGLE	VNE2126
	10	•••••			23	SCREW	IBZ30P080FMC
	11	•••••			24	SCREW	BBZ30P080FMC
	12	CORD CLAMPER	RNH-184		25	FUSE CAUTION LABEL	See Contrast table (2)
	13	CABLE HOLDER	VEC1958		26	CUSHION	VEC1982

(2) CONTRAST TABLE

DVL-919/KU/CA and RD/RA are constructed the same except for the following :

Mark	No.	Symbol and Description	Part No.		Remarks
			KU/CA type	RD/RA type	
	25	FUSE CAUTION LABEL	VRW1695	Not used	

2.5 BOTTOM VIEW SECTION

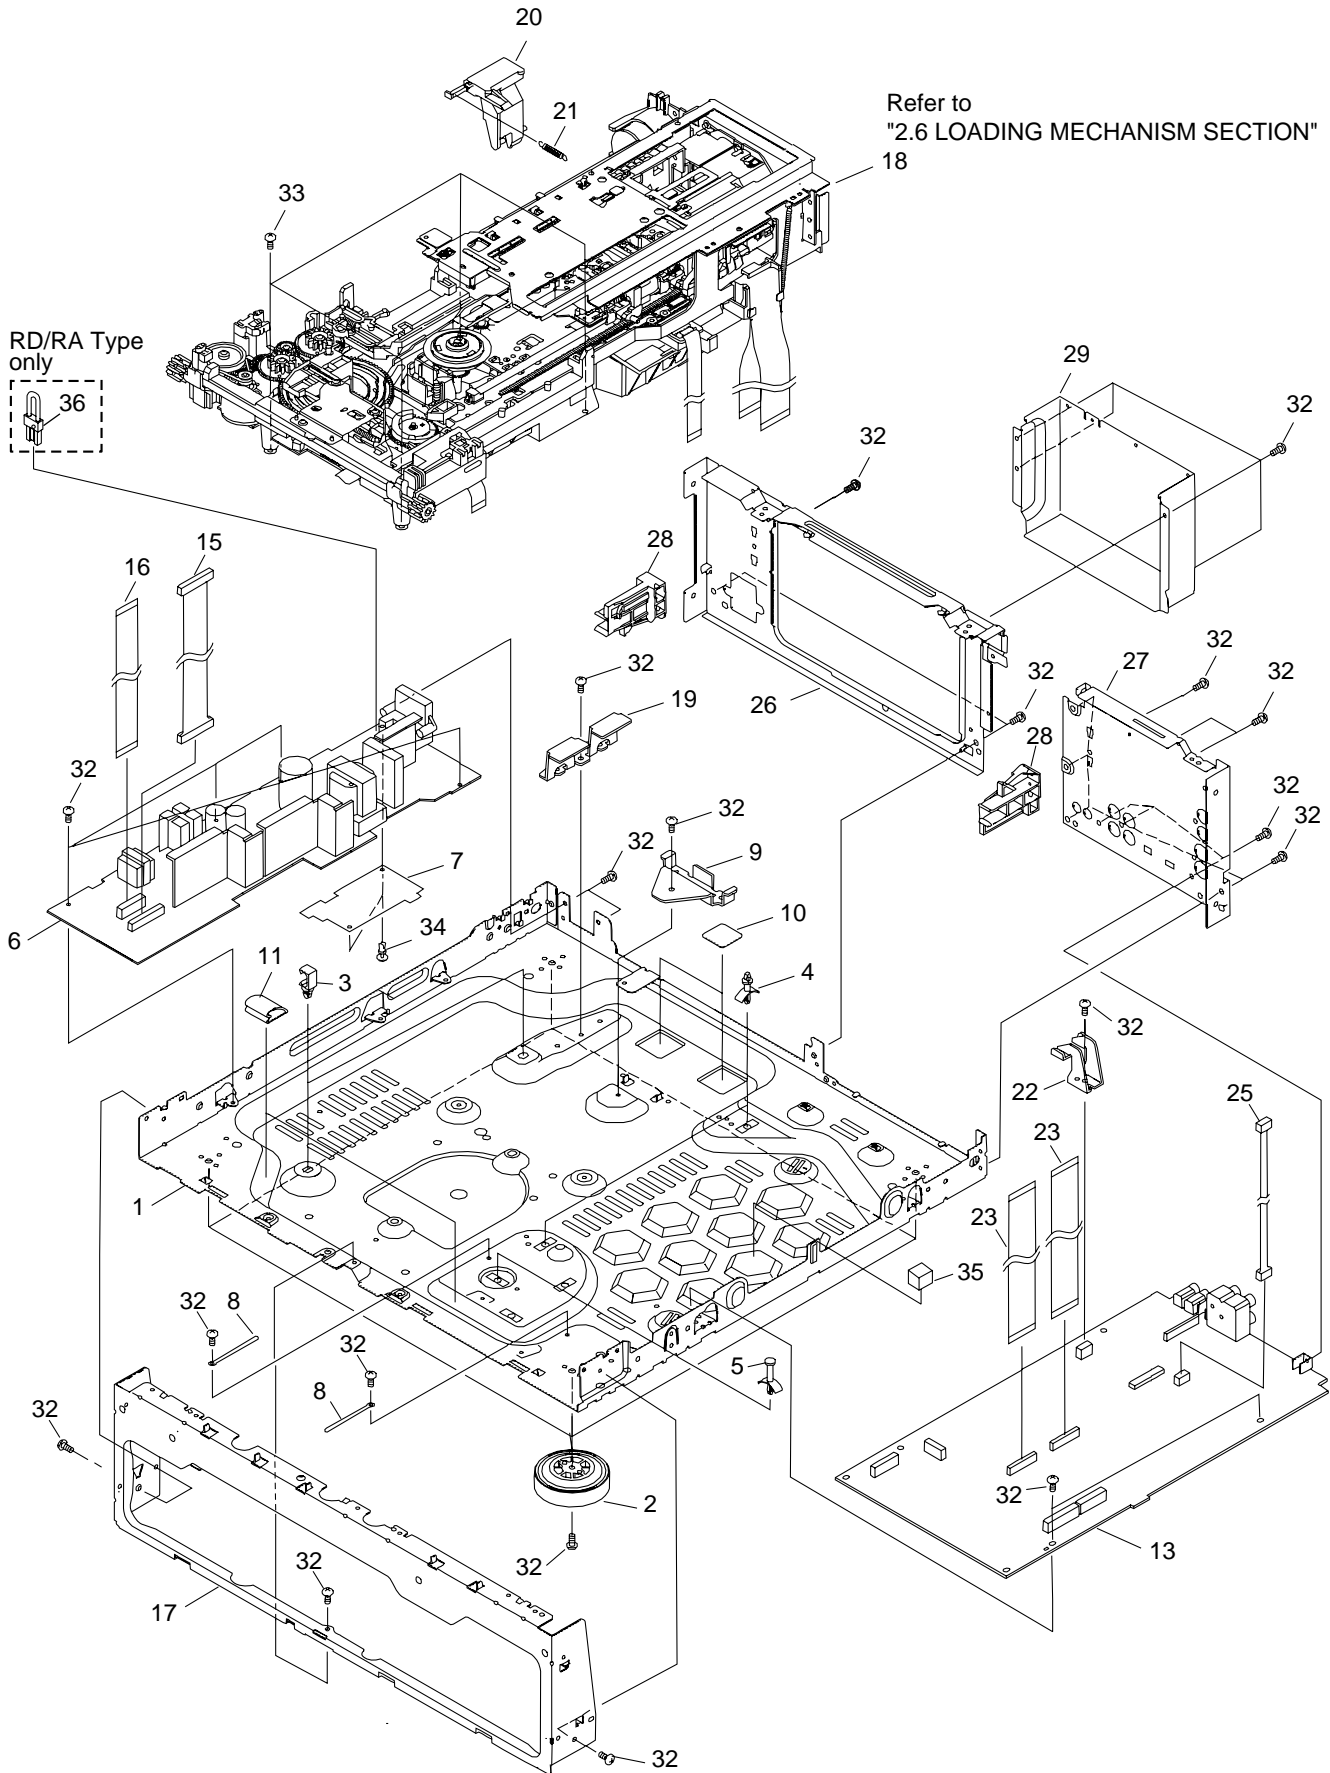

(1) BOTTOM VIEW SECTION PARTS LIST


Mark	No.	Description	Part No.	Mark	No.	Description	Part No.
NSP	1	CHASSIS	VNA1887	NSP	22	CAM HOLDER R	VNE2090
	2	INSULATOR ASSY	VXA2356		23	FLEXIBLE CABLE(22P)	VDA1652
	3	PCB HINGE	VEC1174		24	•••••	
NSP	4	PCB SPACER	AEC1188		25	HOUSING ASSY (4P)	VKP2195
NSP	5	CIRCUIT BOARD SPACER	VEC1957		26	REAR PANEL R	VNA1892
△	6	POWER SUPPLY ASSY	See Contrast table (2)		27	REAR PANEL L	VNA2027
	7	SHEET P	VEC1874		28	TRAY STOPPER	VNL1707
	8	CORD CLAMPER	RNH-184		29	REAR COVER	See Contrast table (2)
NSP	9	STOPPER	VNE2088		30	•••••	
	10	SPACER	VEC1939		31	•••••	
	11	SHELL CLIP	DEC1184		32	SCREW	BBZ30P080FMC
	12	•••••			33	SCREW	BBZ30P100FMC
	13	CLDM ASSY	VWS1358		34	RIVET	RBM-003
	14	•••••		NSP	35	SPACER	VEC1989
	15	HOUSING ASSY (14P)	VKP2151	NSP	36	HOUSING ASSY	See Contrast table (2)
	16	FLEXIBLE CABLE(15P)	VDA1644				
NSP	17	PANEL HOLDER	VNA1686				
NSP	18	MECHANISM ASSY	VWT1149				
NSP	19	CAM HOLDER L	VNE2089				
	20	SHIPPING LEVER	VNL1728				
	21	SHIPPING SPRING	VBH1275				

(2) CONTRAST TABLE

DVL-919/KU/CA and RD/RA are constructed the same except for the following :

Mark	No.	Symbol and Description	Part No.		Remarks
			KU/CA type	RD/RA type	
△	6	POWER SUPPLY ASSY	VWR1286	VWR1287	
	29	REAR COVER	VNA2028	VNA2056	
NSP	36	HOUSING ASSY	Not used	VKP2189	


2.6 LOADING MECHANISM SECTION

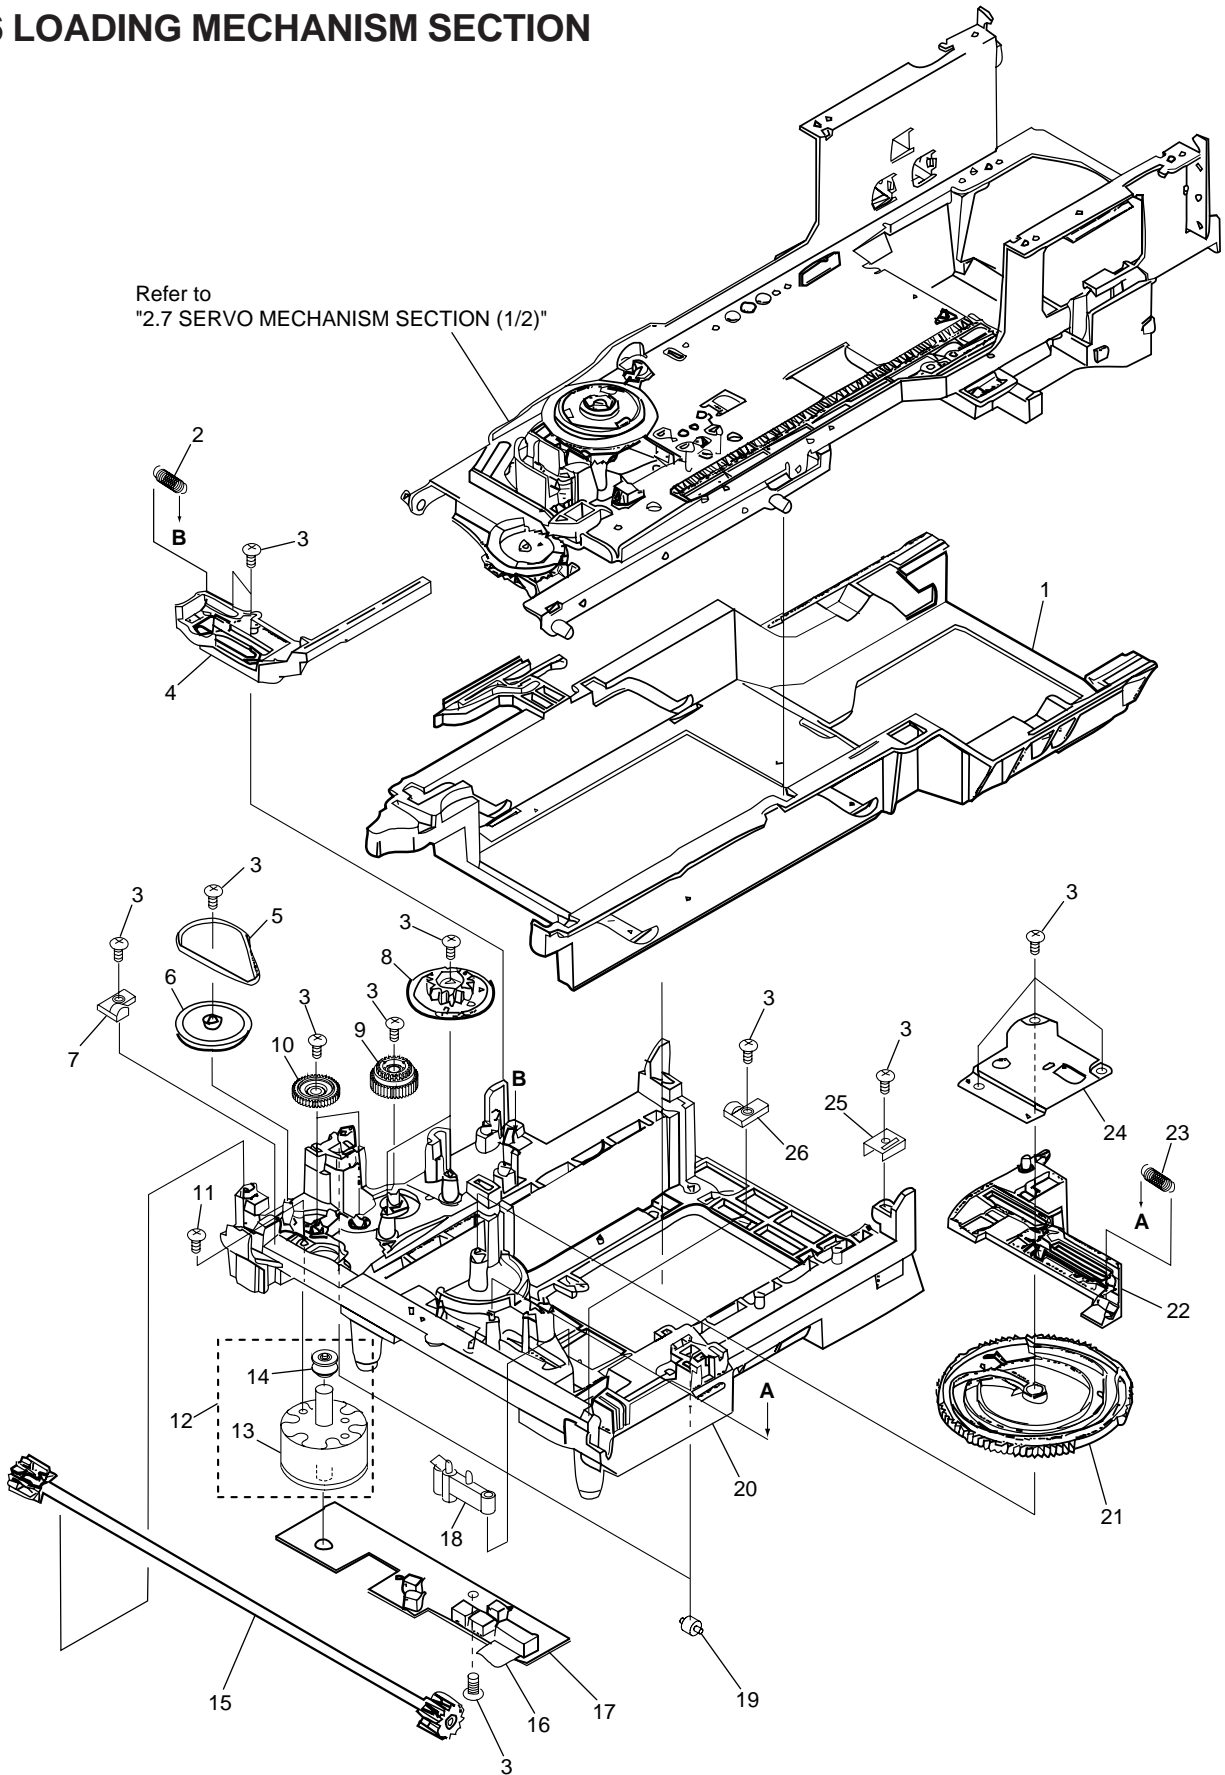

● **LOADING MECHANISM SECTION PARTS LIST**

Mark	No.	Description	Part No.	Mark	No.	Description	Part No.
	1	Clamp Cam B	VNL1765		16	Flexible Cable (10P)	VDA1645
	2	CDP Spring	VBH1191	NSP	17	LMSB Assy	VWG1554
	3	Screw	Z39-019		18	MB Switch Lever	VNL1664
	4	CD Plate	VNL1685		19	Roller	VNL1042
	5	Rubber Belt	VEB1184		20	Mechanism Base	VNK3239
	6	Gear Pulley	VNL1662		21	Cam Gear	VNL1625
	7	Slider (L)	VNL1665		22	Cam Plate	VNL1631
	8	Twin Gear	VNL1626		23	CAS Spring	VBH1190
	9	Center Gear	VNL1660		24	Shaft Holder	VNE1942
	10	Double Gear	VNL1661		25	CAM Holder	VNE2032
	11	Screw	BMZ26P040FMC		26	Slider (R)	VNL1666
	12	Loading Motor Assy	VXX2045				
	13	Carriage Motor	VXM1033				
NSP	14	Motor Pulley	VNL1630				
	15	Synchro Gear Assy	VXA2105				


2.7 SERVO MECHANISM SECTION (1/2)

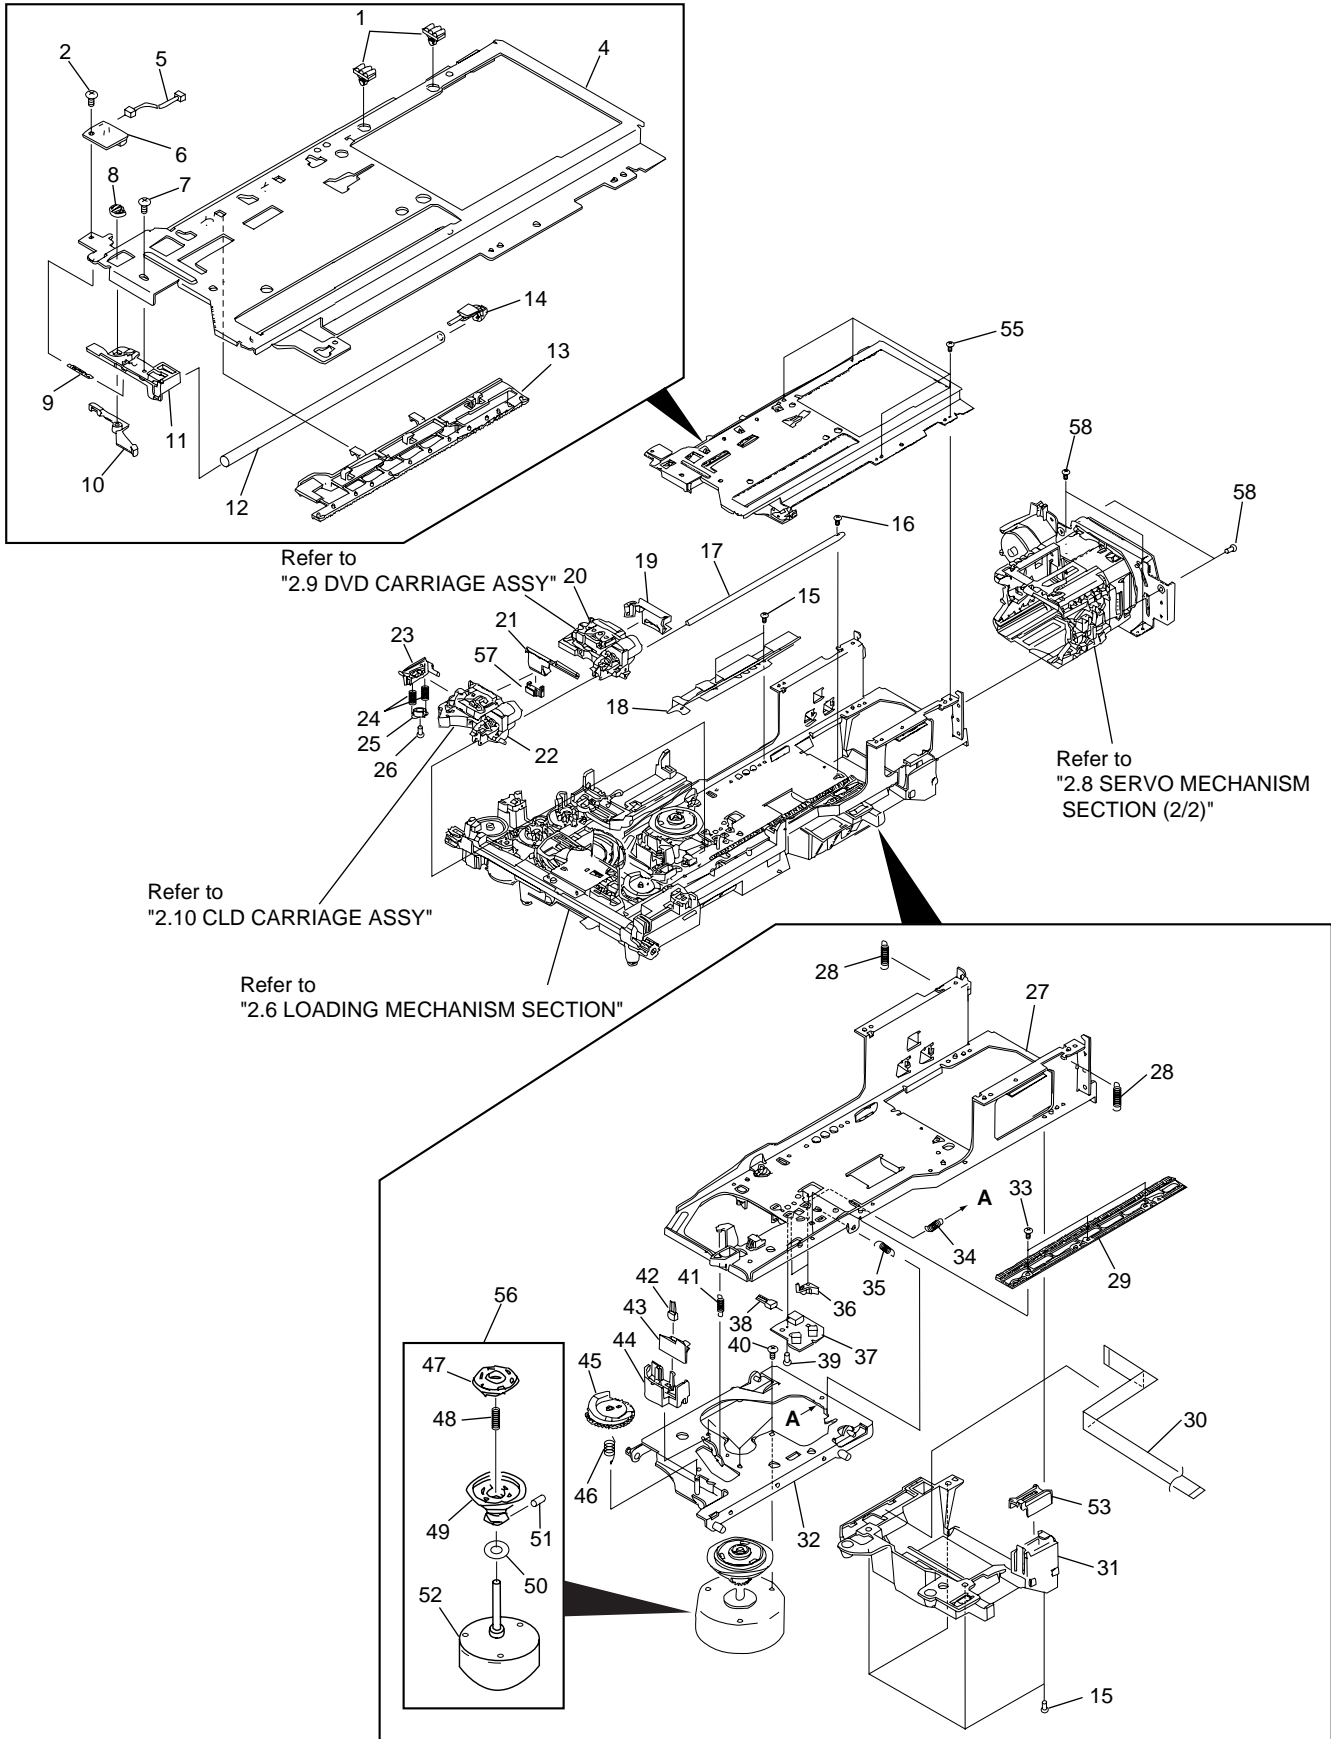

● SERVO MECHANISM SECTION (1/2) PARTS LIST

Mark	No.	Description	Part No.	Mark	No.	Description	Part No.
	1	Mini Clamp	VEC2030		31	Flexible Cable Cover	VNL1727
	2	Screw	BBZ26P060FMC		32	Motor Base	VNE1941
	3	•••••			33	Screw	IBZ26P060FMC
	4	Tilt Base (Upper)	VNE2062		34	Tilt Spring	VBH1263
	5	Housing Assy (2P)	VKP2136		35	Thrust Spring	VBH1245
NSP	6	BISB Assy	VWG1796		36	CA Switch Lever	VNL1644
	7	Screw	BPZ20P040FZK	NSP	37	PKSB Assy	VWG1555
	8	B Cam	VNL1725		38	Housing Assy (3P)	VKP2045
	9	Support Spring	VBH1273		39	Screw	IBZ26P120FMC
	10	SW Lever B	VNL1723		40	Screw	PMA30P050FMC
	11	Shaft Holder	VNL1724		41	Tilt Spring B	VBH1287
	12	CA Shaft (Upper)	VLL1486		42	Housing Assy (3P)	VKP2046
	13	CA Rack (Upper)	VNL1722	NSP	43	FG Assy	VWG1556
	14	Shaft Stay	VNL1726		44	FG Base	VNL1781
	15	Screw	BBZ30P080FMC		45	Tilt Cam	VNL1643
	16	Screw	PPZ20P060FMC		46	Tilt Cam Spring	VBH1243
	17	CA Shaft (Lower)	VLL1496		47	PRC Hub	VNL1684
	18	TAN Guide	VNE2061		48	Centering Spring	VBH1269
	19	FPC Holder A	VNL1751		49	R Turn Table Assy	VXA2354
△	20	DVD Carriage Assy	VWT1146	NSP	50	Oil Stopper	VBH1002
	21	FPC Holder B	VNL1801		51	Screw	ZMD30H030FBT
△	22	CLD Carriage Assy	VWT1141	NSP	52	Spindle Motor	VXM1057
	23	CA Guide	VNL1668		53	Cover S	VNL1780
	24	TAN Spring (B)	VBH1264		54	•••••	
	25	TAN Lever (B)	VNL1669		55	Screw	BBZ30P050FZK
	26	Screw	PMZ20P060FZK		56	Spindle Motor Assy	VXX2579
	27	Tilt Base (Under)	VNL1711		57	FPC Holder	VNL1789
	28	Tilt Rear Spring	VBH1274		58	Screw	BCZ30P080FMC
	29	CA Rack (Lower)	VNL1712				
	30	Flexible Cable (6P)	VDA1642				


2.8 SERVO MECHANISM SECTION (2/2)

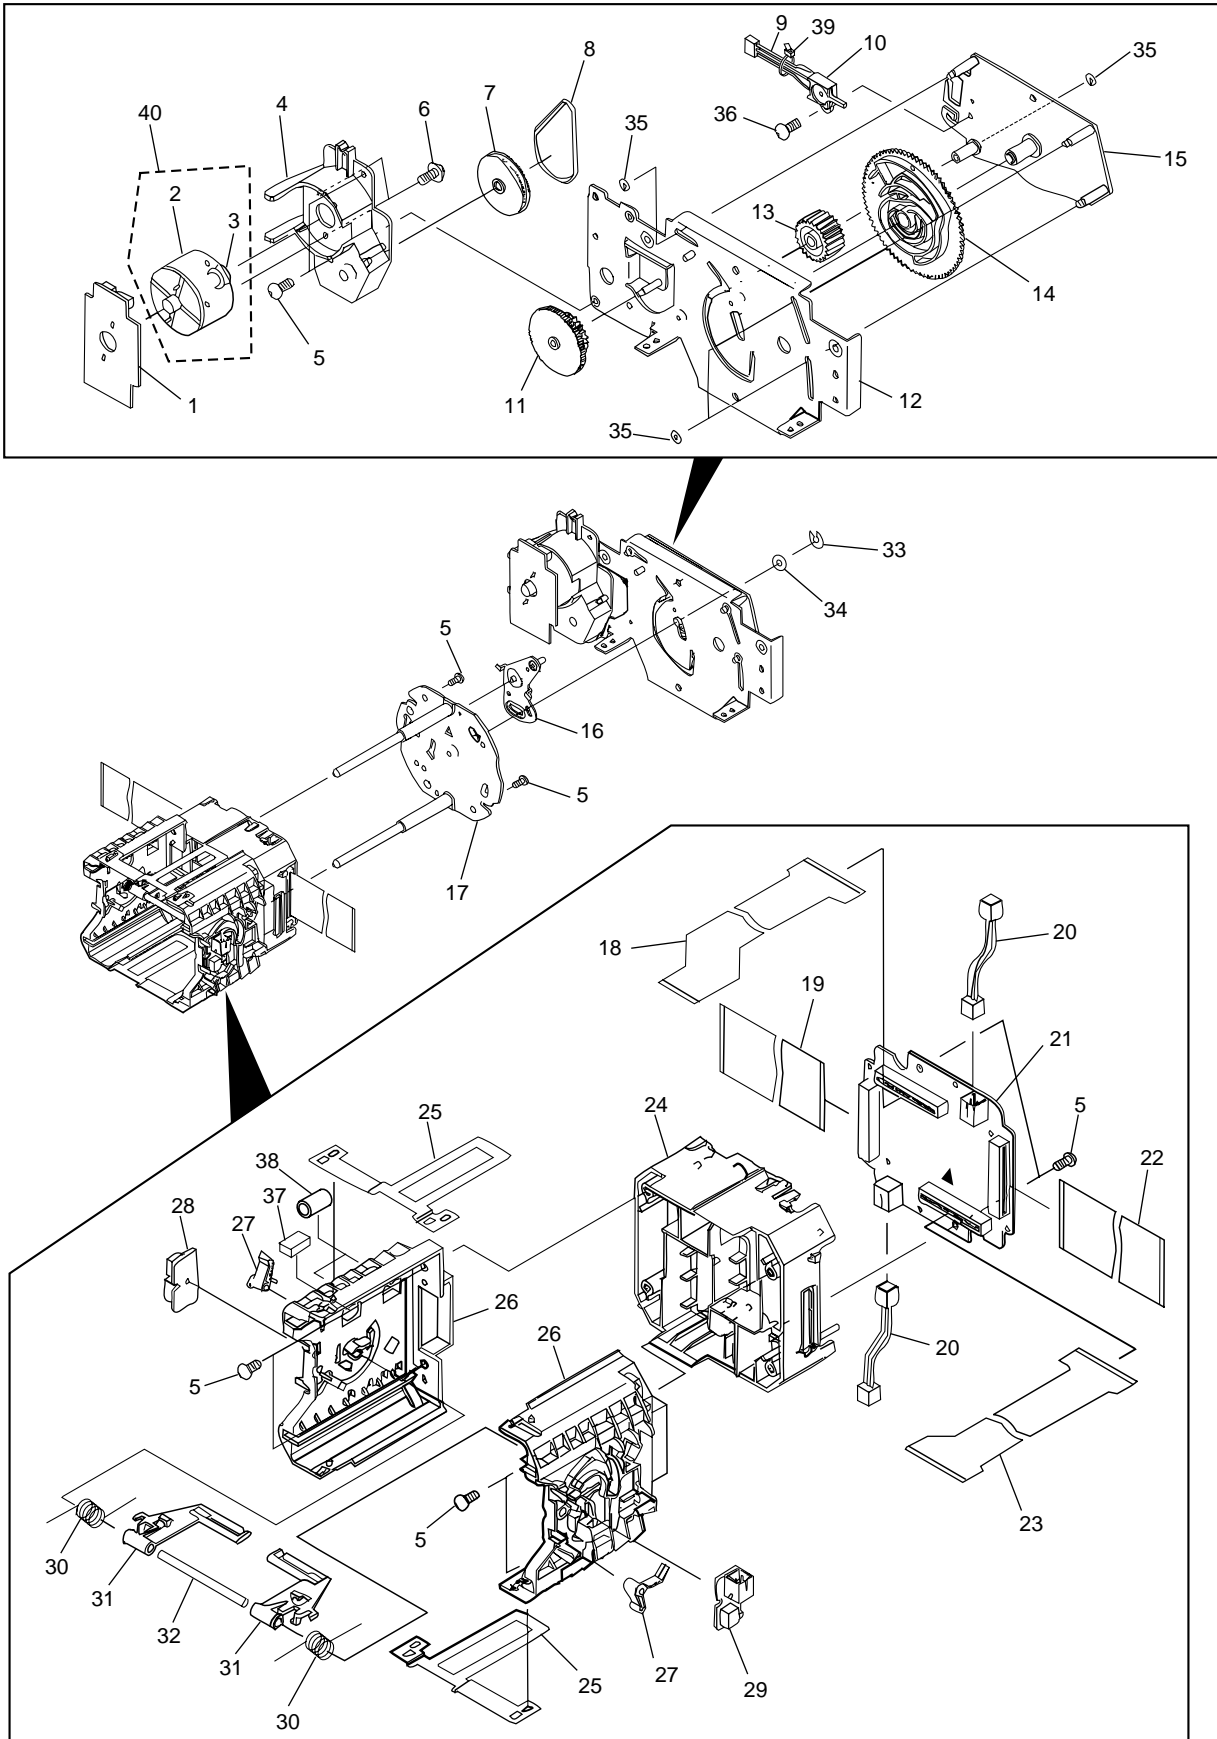

● SERVO MECHANISM SECTION (2/2) PARTS LIST

Mark	No.	Description	Part No.	Mark	No.	Description	Part No.
NSP	1	TNMB Assy	VWG1793	NSP	21	CNNB Assy	VWG1792
	2	Carriage Motor	VXM1033		22	Flexible Cable (27P)	VDA1643
NSP	3	Motor Pulley	VNL1630		23	PU FPC-A	VNP1582
	4	Motor Holder	VNL1717		24	PCB Holder	VNL1716
	5	Screw	BBZ30P080FMC		25	FC Guide	VNE2059
	6	Screw	BMZ26P040FMC		26	PU Holder	VNL1715
	7	Gear Pulley	VNL1662		27	SW Lever C	VNL1714
	8	Rubber Belt	VEB1184	NSP	28	LCSB Assy	VWG1795
	9	Housing Assy (3P)	VKP2137	NSP	29	DCSB Assy	VWG1794
	10	Lever Switch	DSK1003		30	FC Arm Spring	VBH1272
	11	Middle Gear	VNL1720		31	FC Arm	VNL1713
	12	Turn Panel Assy	VXA2337		32	Tilt Shaft	VLL1175
	13	Gear S	VNL1719		33	E Ring	YE30FUC
	14	Turn Cam Gear	VNL1718		34	Washer	WA42D080D050
	15	Swing Plate Assy	VXA2289		35	Washer	WT26D070D050
	16	Turn Lever Assy	VXA2292		36	Screw	PMA26P060FMC
	17	Turn Plate Assy	VXA2290		37	Cushion	VEC1917
	18	PU FPC-B	VNP1583		38	Tube	VEB1273
	19	Flexible Cable (26P)	VDA1653		39	Binder	Z09-056
	20	Connector Assy	PG02KK-E10		40	Loading Motor Assy	VXX2045

2.9 DVD CARRIAGE ASSY

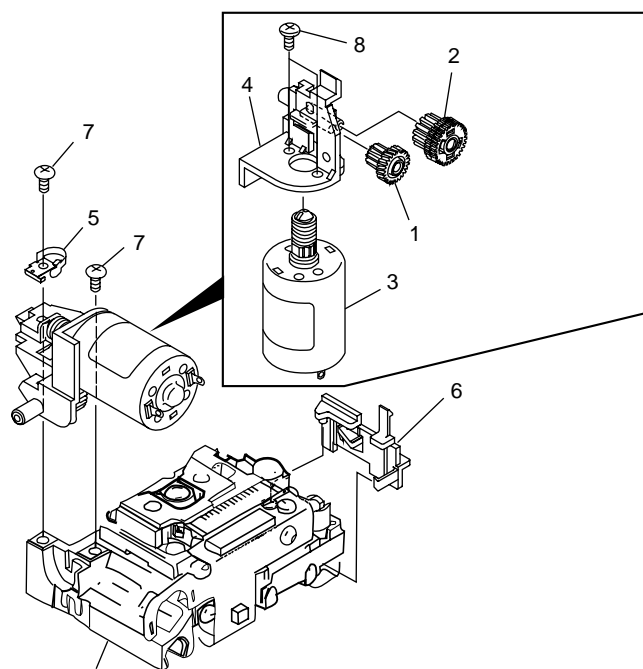


This part is no service part.

● DVD CARRIAGE ASSY PARTS LIST

Mark	No.	Description	Part No.
	1	CA Gear (A)	VNL1782
	2	CA Gear B Assy	VXX2471
	3	Slider Motor Assy	VXX2472
	4	Motor Holder	VNL1779
	5	Thrust Holder	VBK1058
	6	CA Guide B	VNL1721
	7	Screw	BBZ20P050FZK
	8	Screw	PMA20P033FUC

2.10 CLD CARRIAGE ASSY

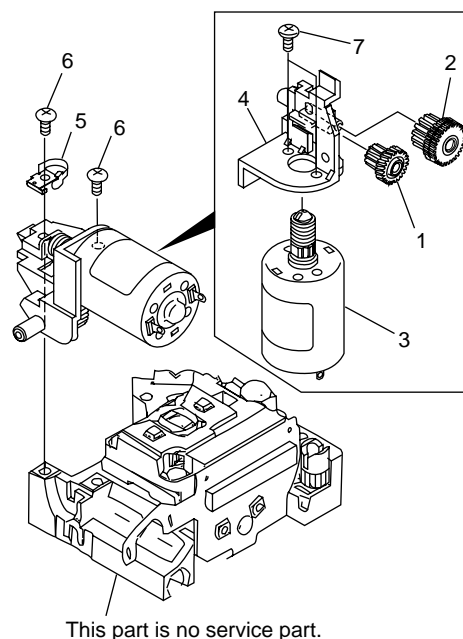


This part is no service part.

● CLD CARRIAGE ASSY PARTS LIST

Mark	No.	Description	Part No.
	1	CA Gear (A)	VNL1782
	2	CA Gear (B)	VNL1639
	3	Slider Motor Assy	VXX2472
	4	Motor Holder	VNL1779
	5	Thrust Holder	VBK1058
	6	Screw	PBZ20P050FMC
	7	Screw	PMA20P033FUC

3. SCHEMATIC DIAGRAM



3.1 OVERALL WIRING DIAGRAM, LMSB, PKSB, FG, CNNB, TNMB, DCSB, LCSB and BISB ASSEMBLIES

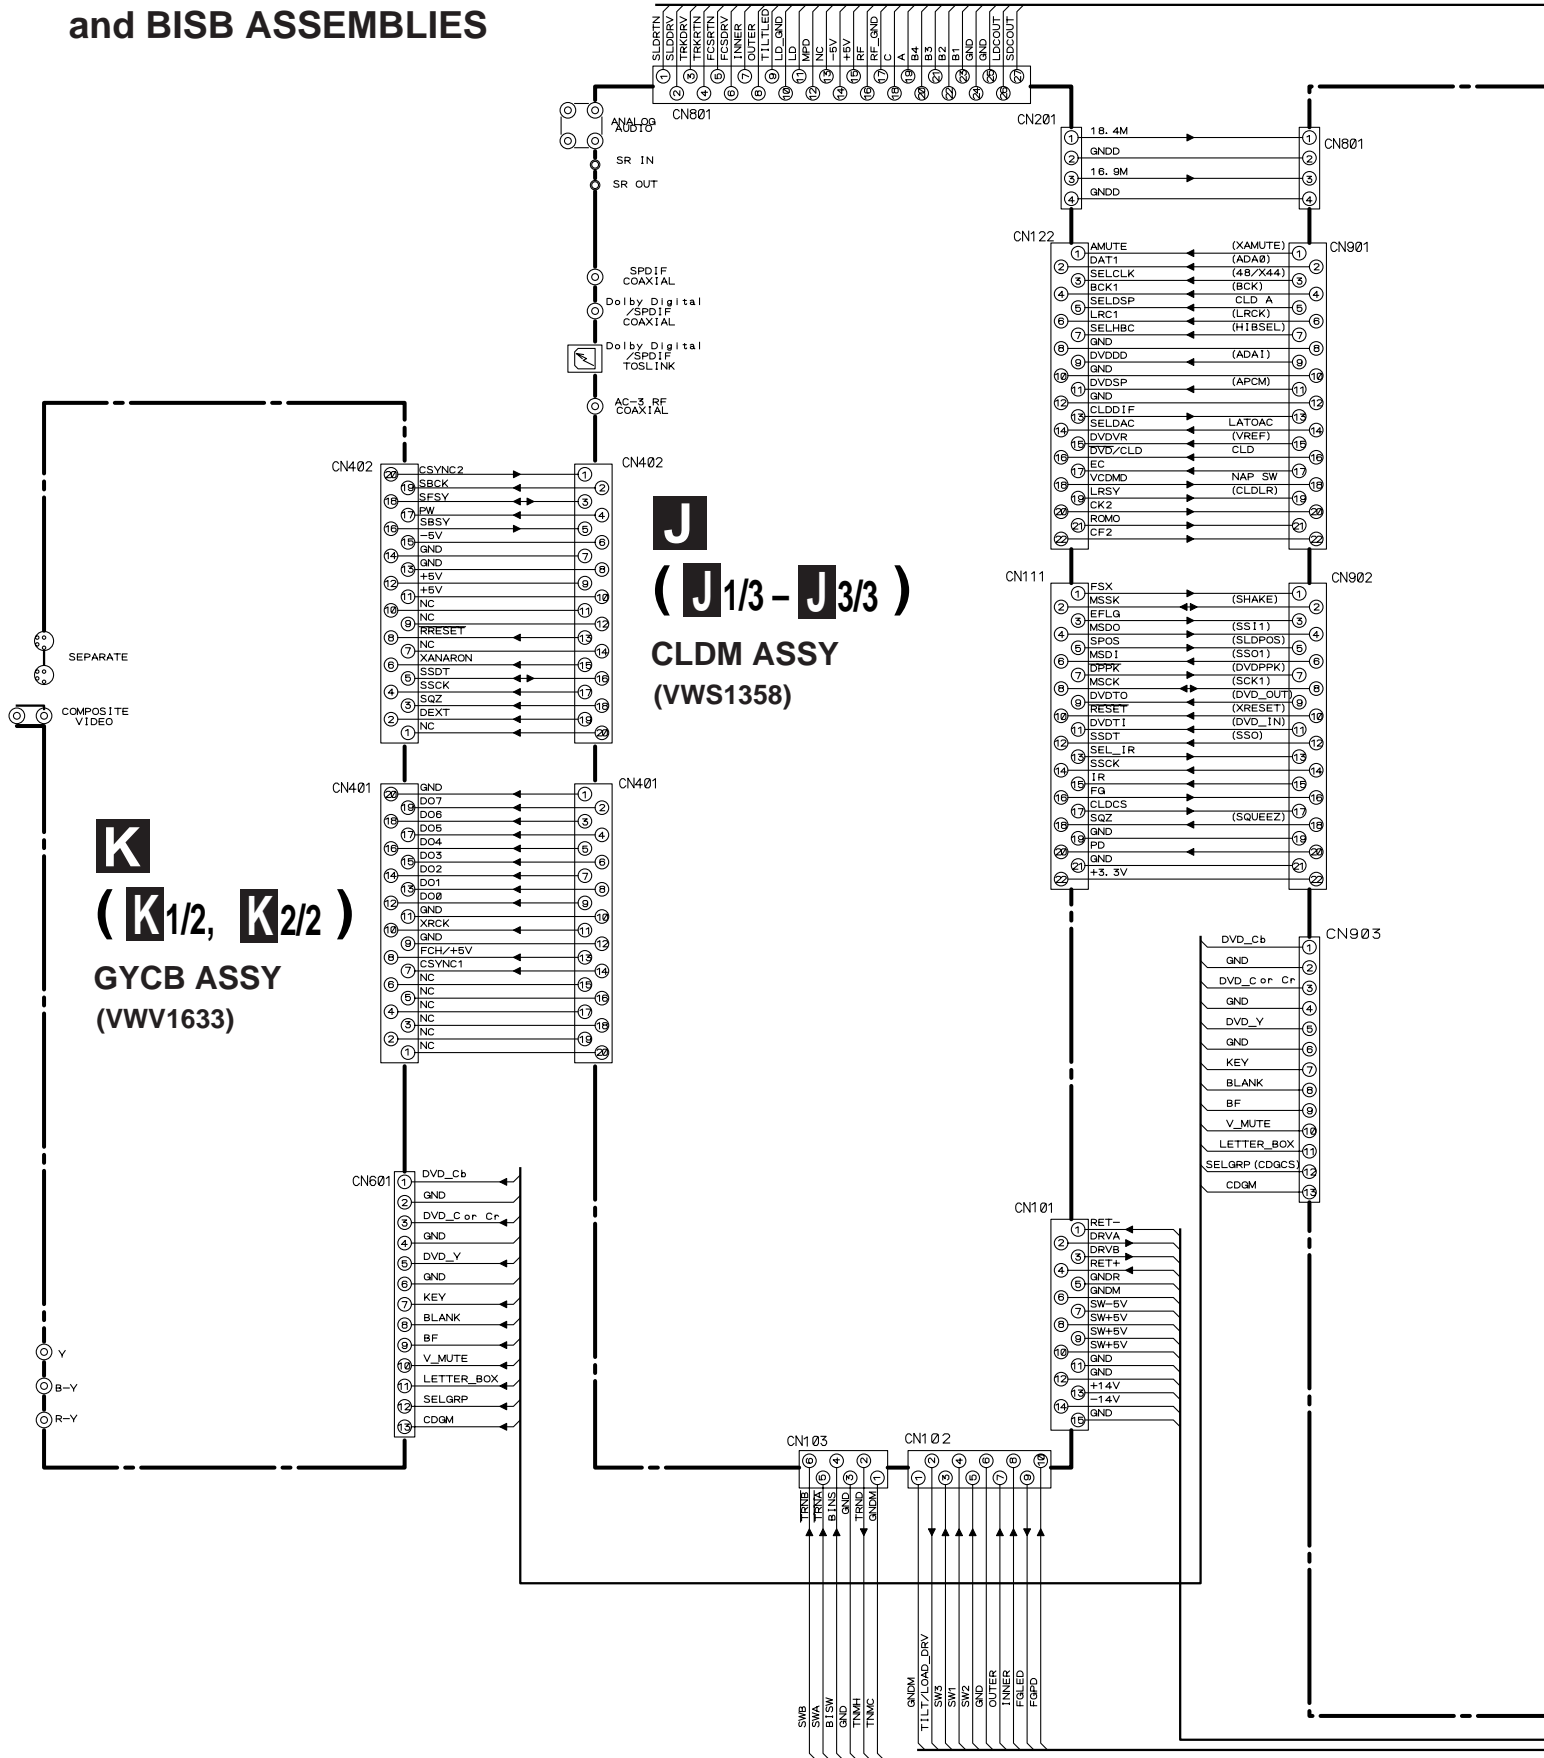


Note : When ordering service parts, be sure to refer to "EXPLODED VIEWS and PARTS LIST" or "PCB PARTS LIST".

- ➔ : RF SIGNAL ROUTE
- (F) : FOCUS SERVO LOOP LINE
- (T) : TRACKING SERVO LOOP LINE
- (S) : SLIDER SERVO LOOP LINE


I
(I1/3 - I3/3)
DVDM ASSY
(VWS1377)

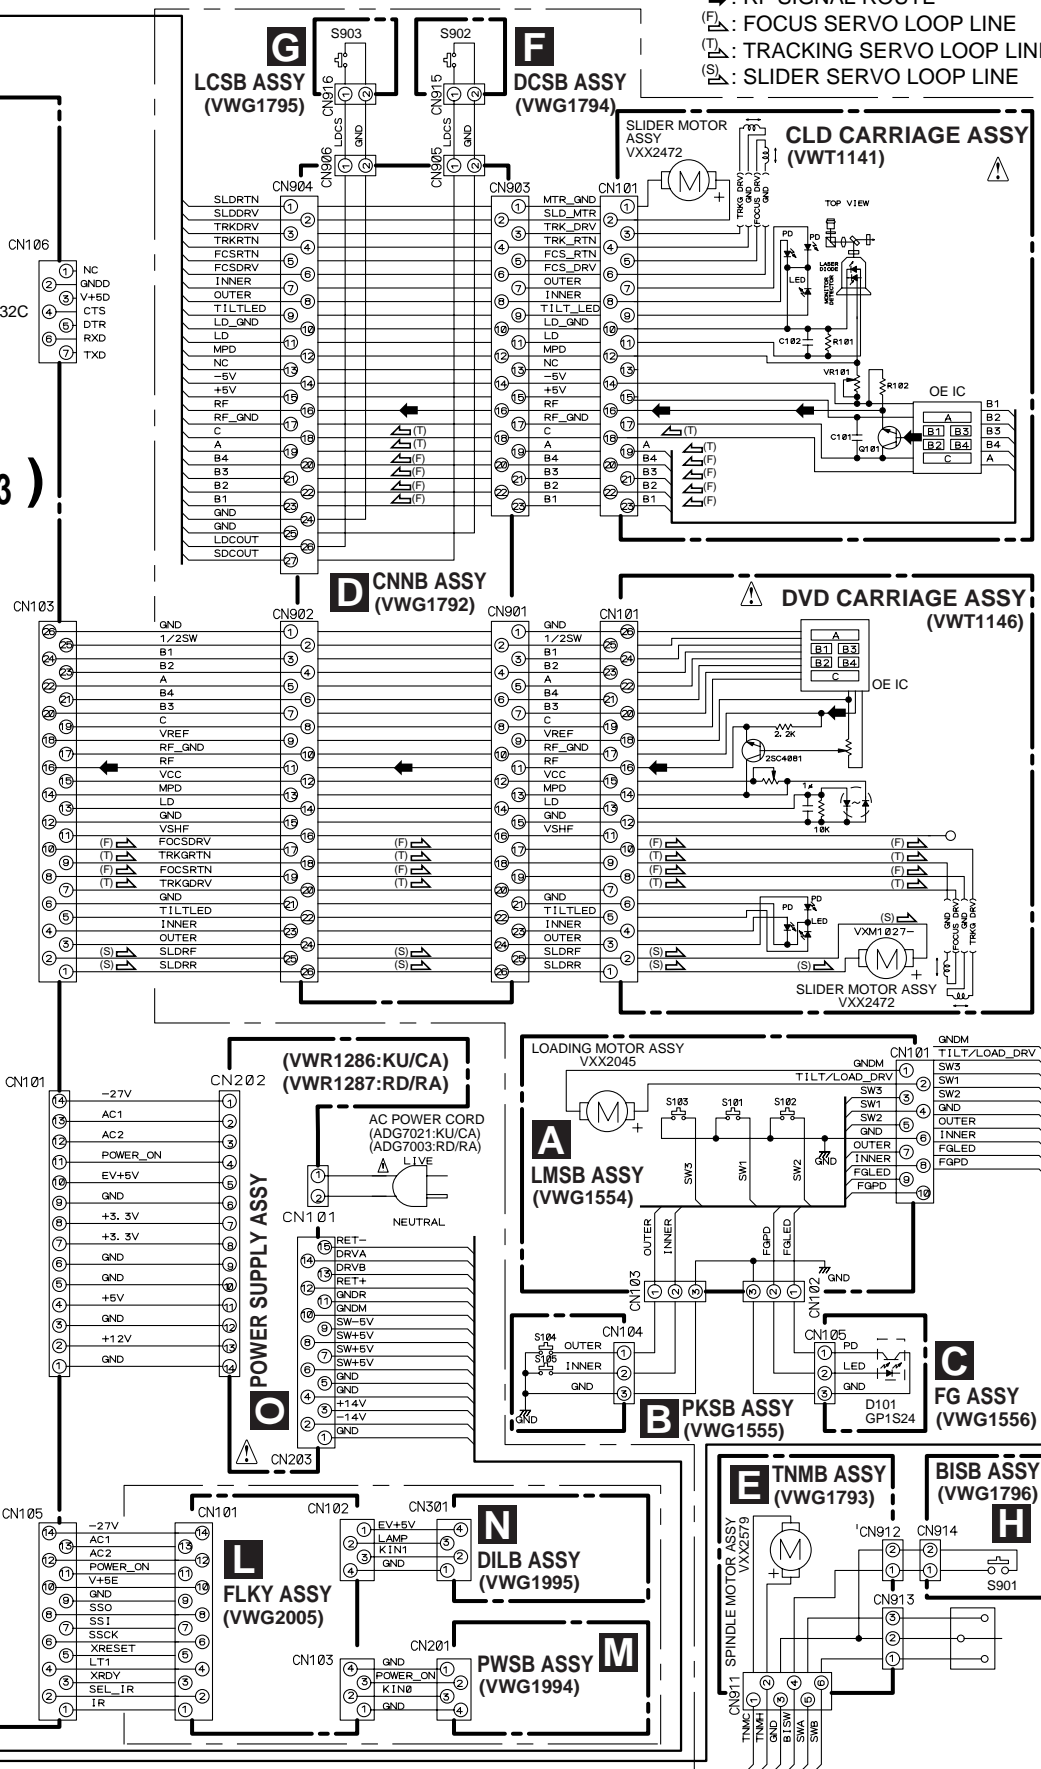


A B C D E F G H

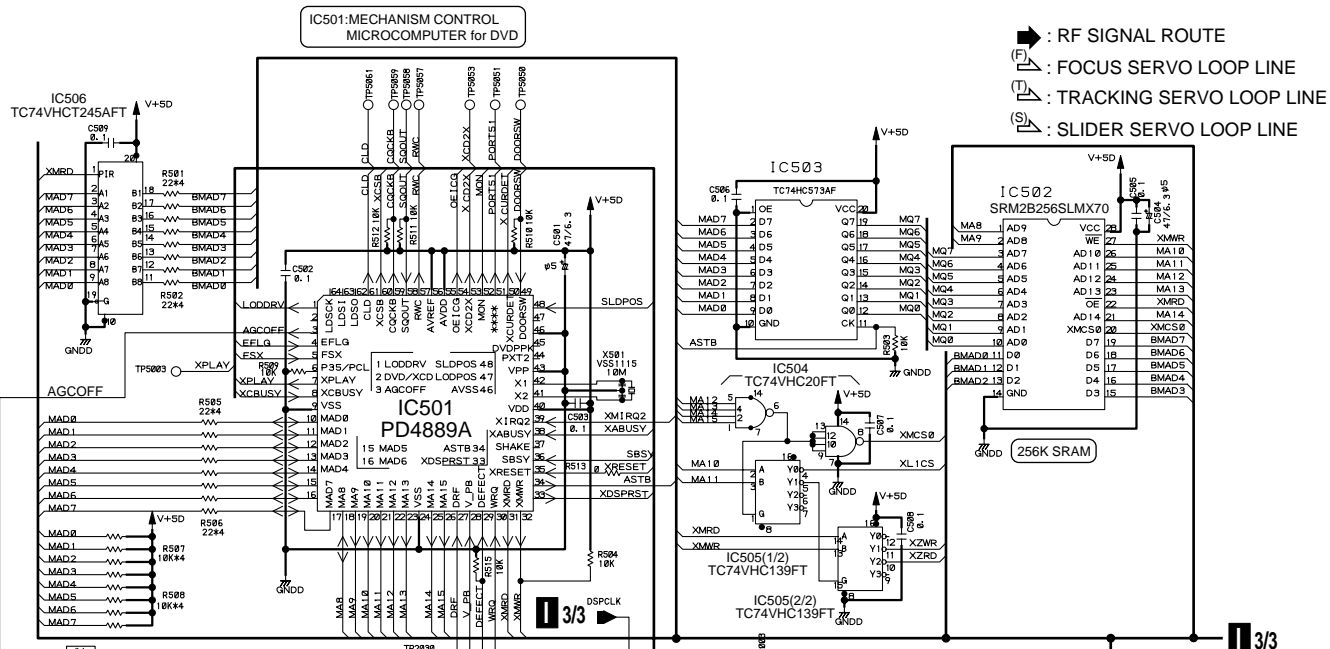

- : RF SIGNAL ROUTE
- : FOCUS SERVO LOOP LINE
- : TRACKING SERVO LOOP LINE
- : SLIDER SERVO LOOP LINE

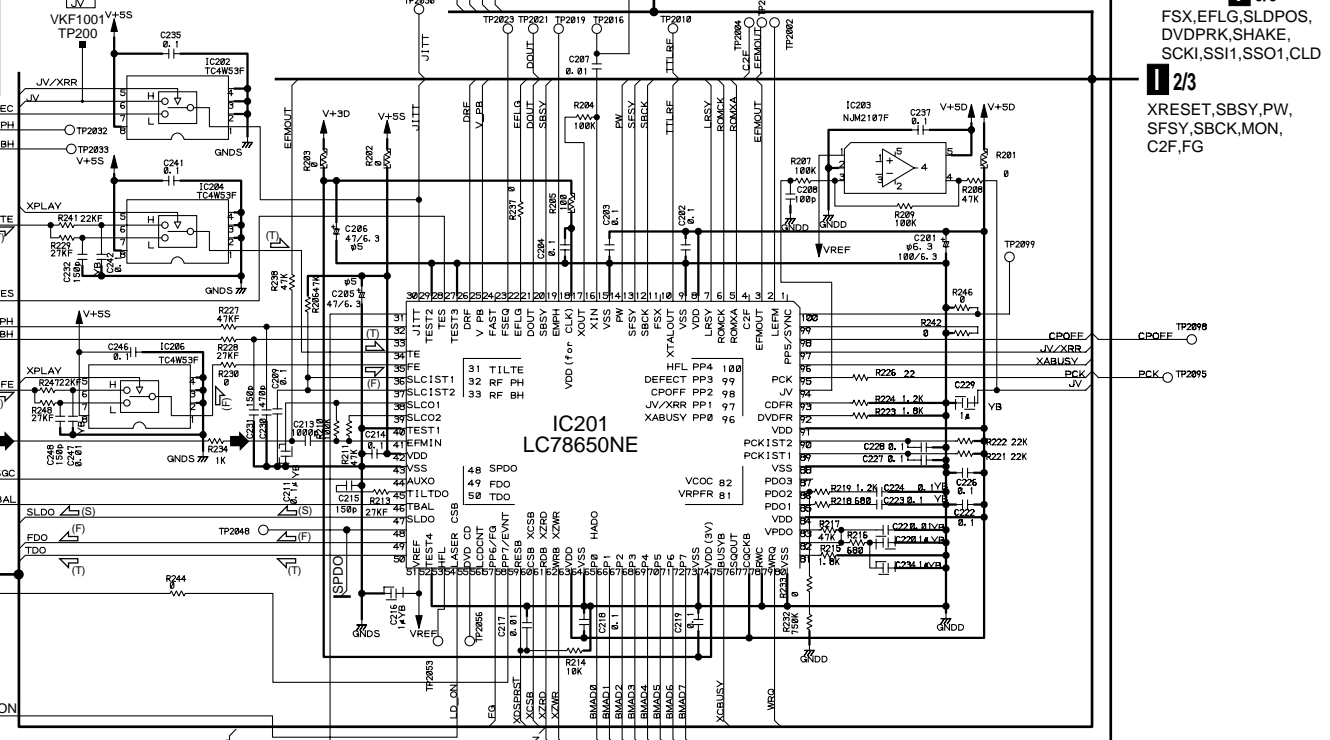


- FSX, EFLG, SLDPDS, DVDPRK, SHAKE, SCKI, SS1, SSO1, CLD
- XRESET, SBSY, PW, SFSY, SBCK, MON, C2F, FG

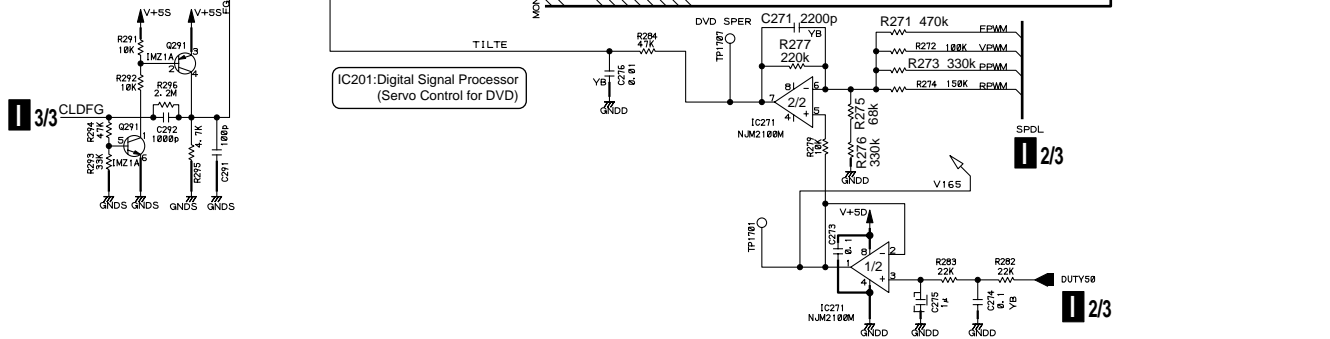










- SPDL
- DUTY50

◁ : AUDIO SIGNAL ROUTE
▶ (ROM) : ROM DATA SIGNAL ROUTE

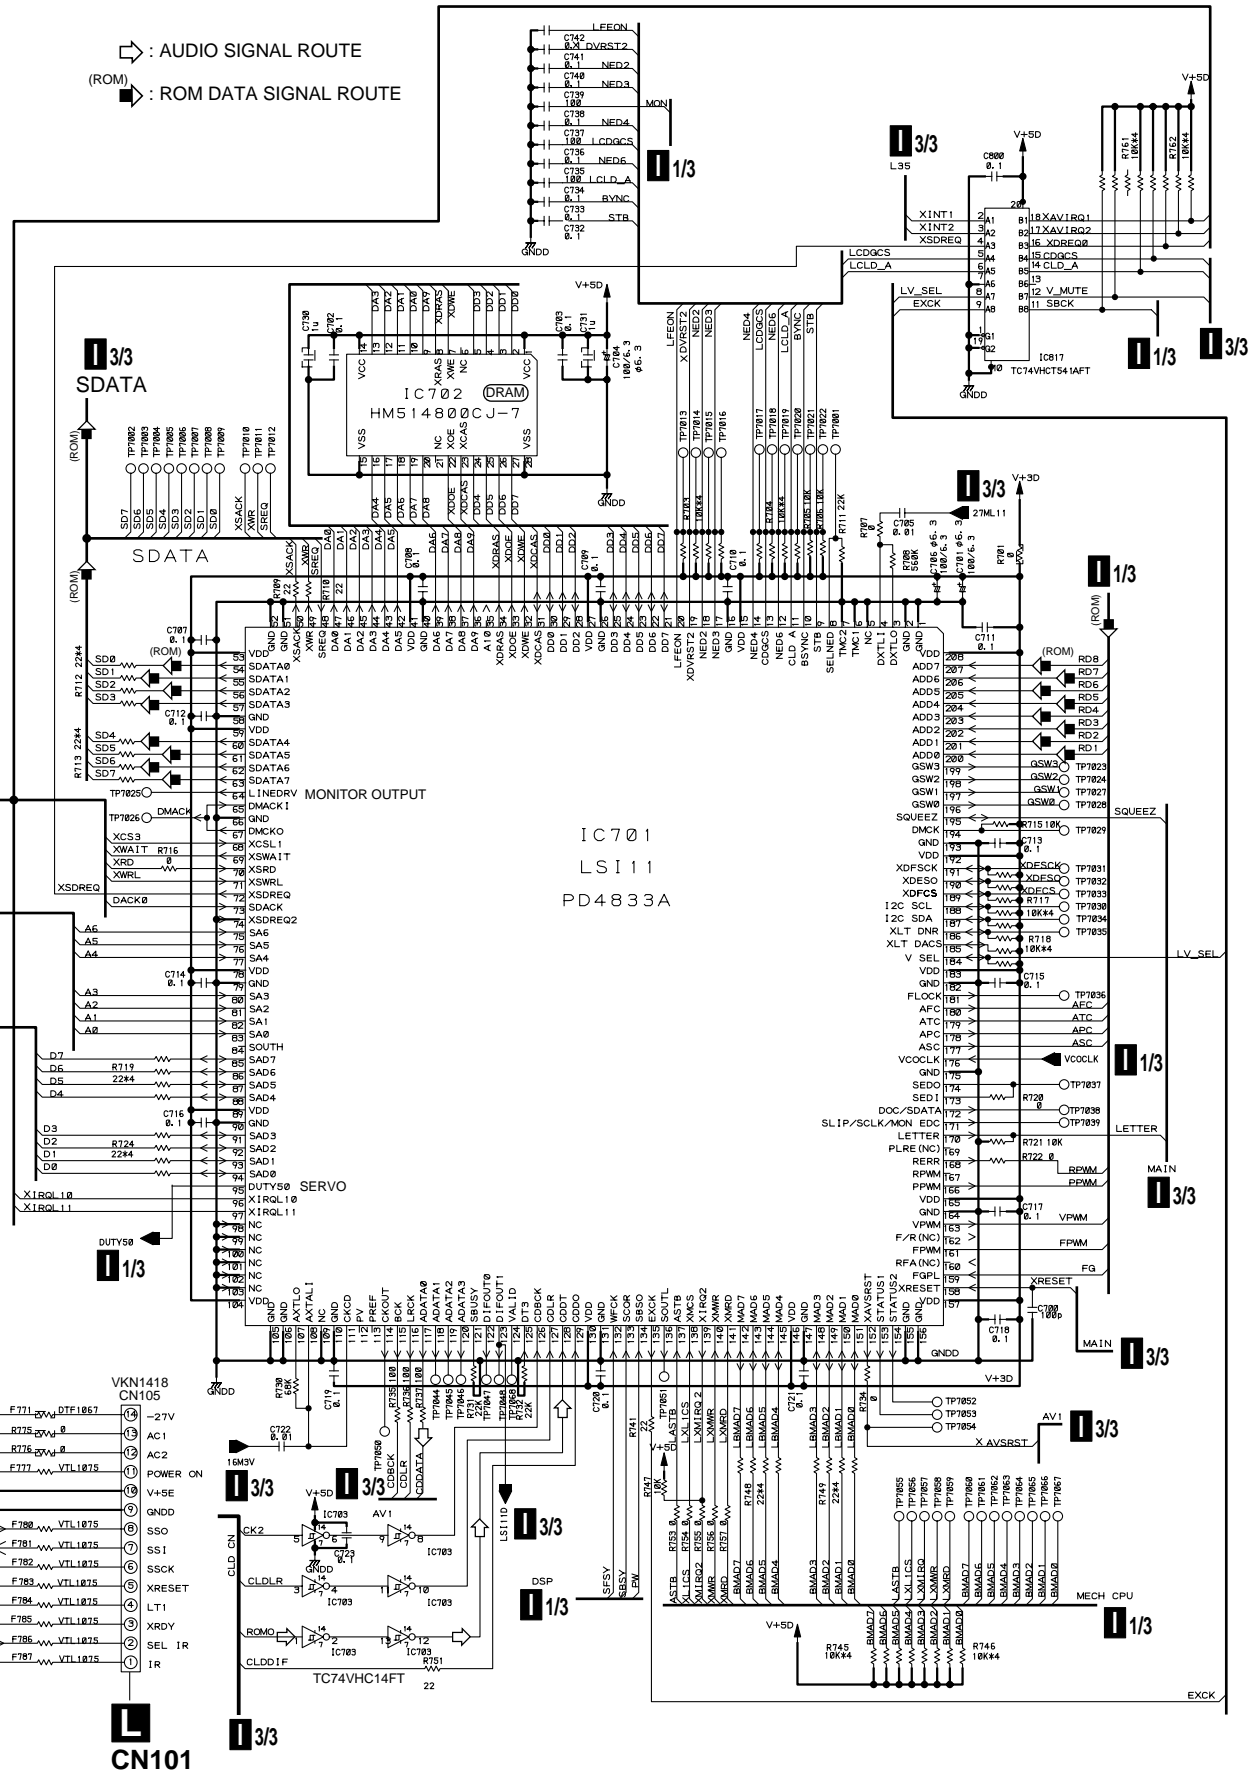

CN101

- ◁ : AUDIO SIGNAL ROUTE
- (ROM) ◁ : ROM DATA SIGNAL ROUTE
- (COM) ◁ : COMPOSITE VIDEO SIGNAL ROUTE
- (Y) ◁ : Y SIGNAL ROUTE
- (C) ◁ : C SIGNAL ROUTE

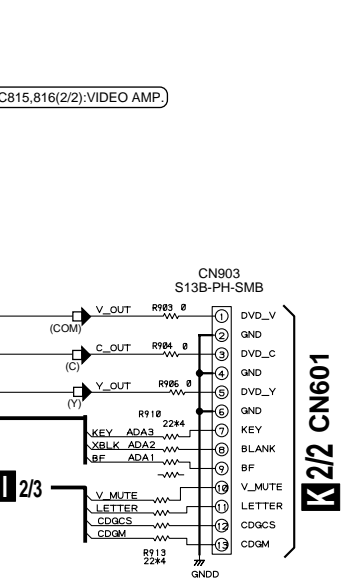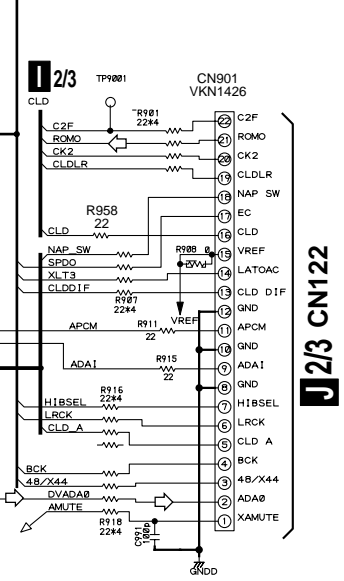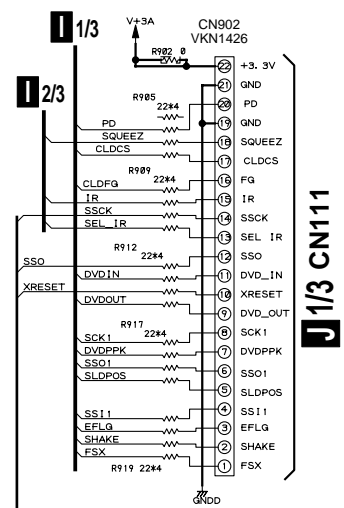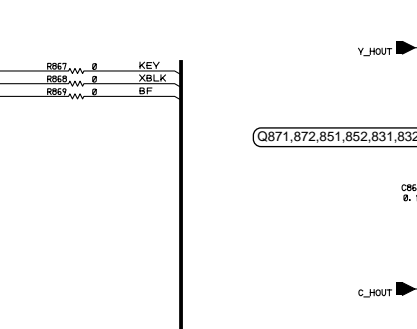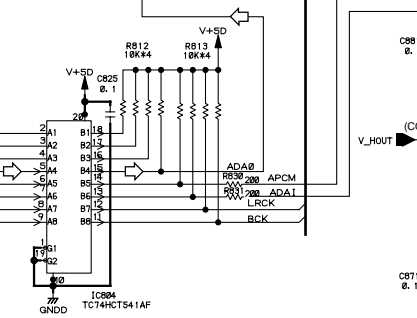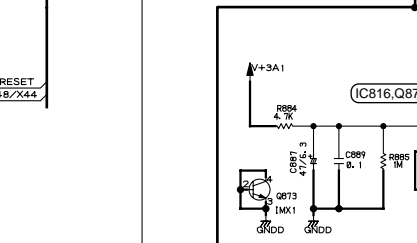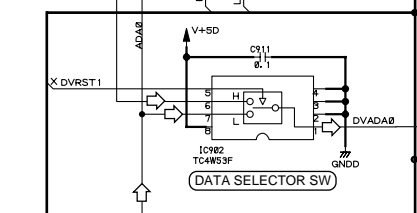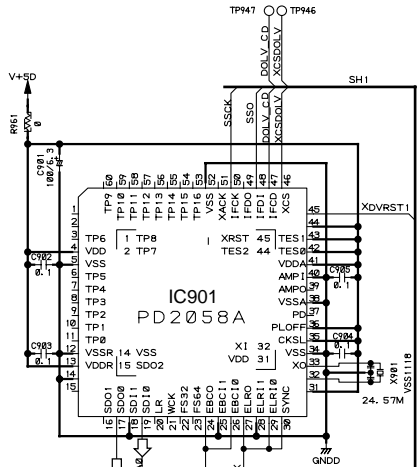

A
B
C
D

3.5 CLDM ASSY (1/3)

CLDM ASSY (VWS1358)

A

B

C

D

J2/3

J3/3

J1/3

J3/3 CN902


CN203

DN904




J3/3

AN101

EN911


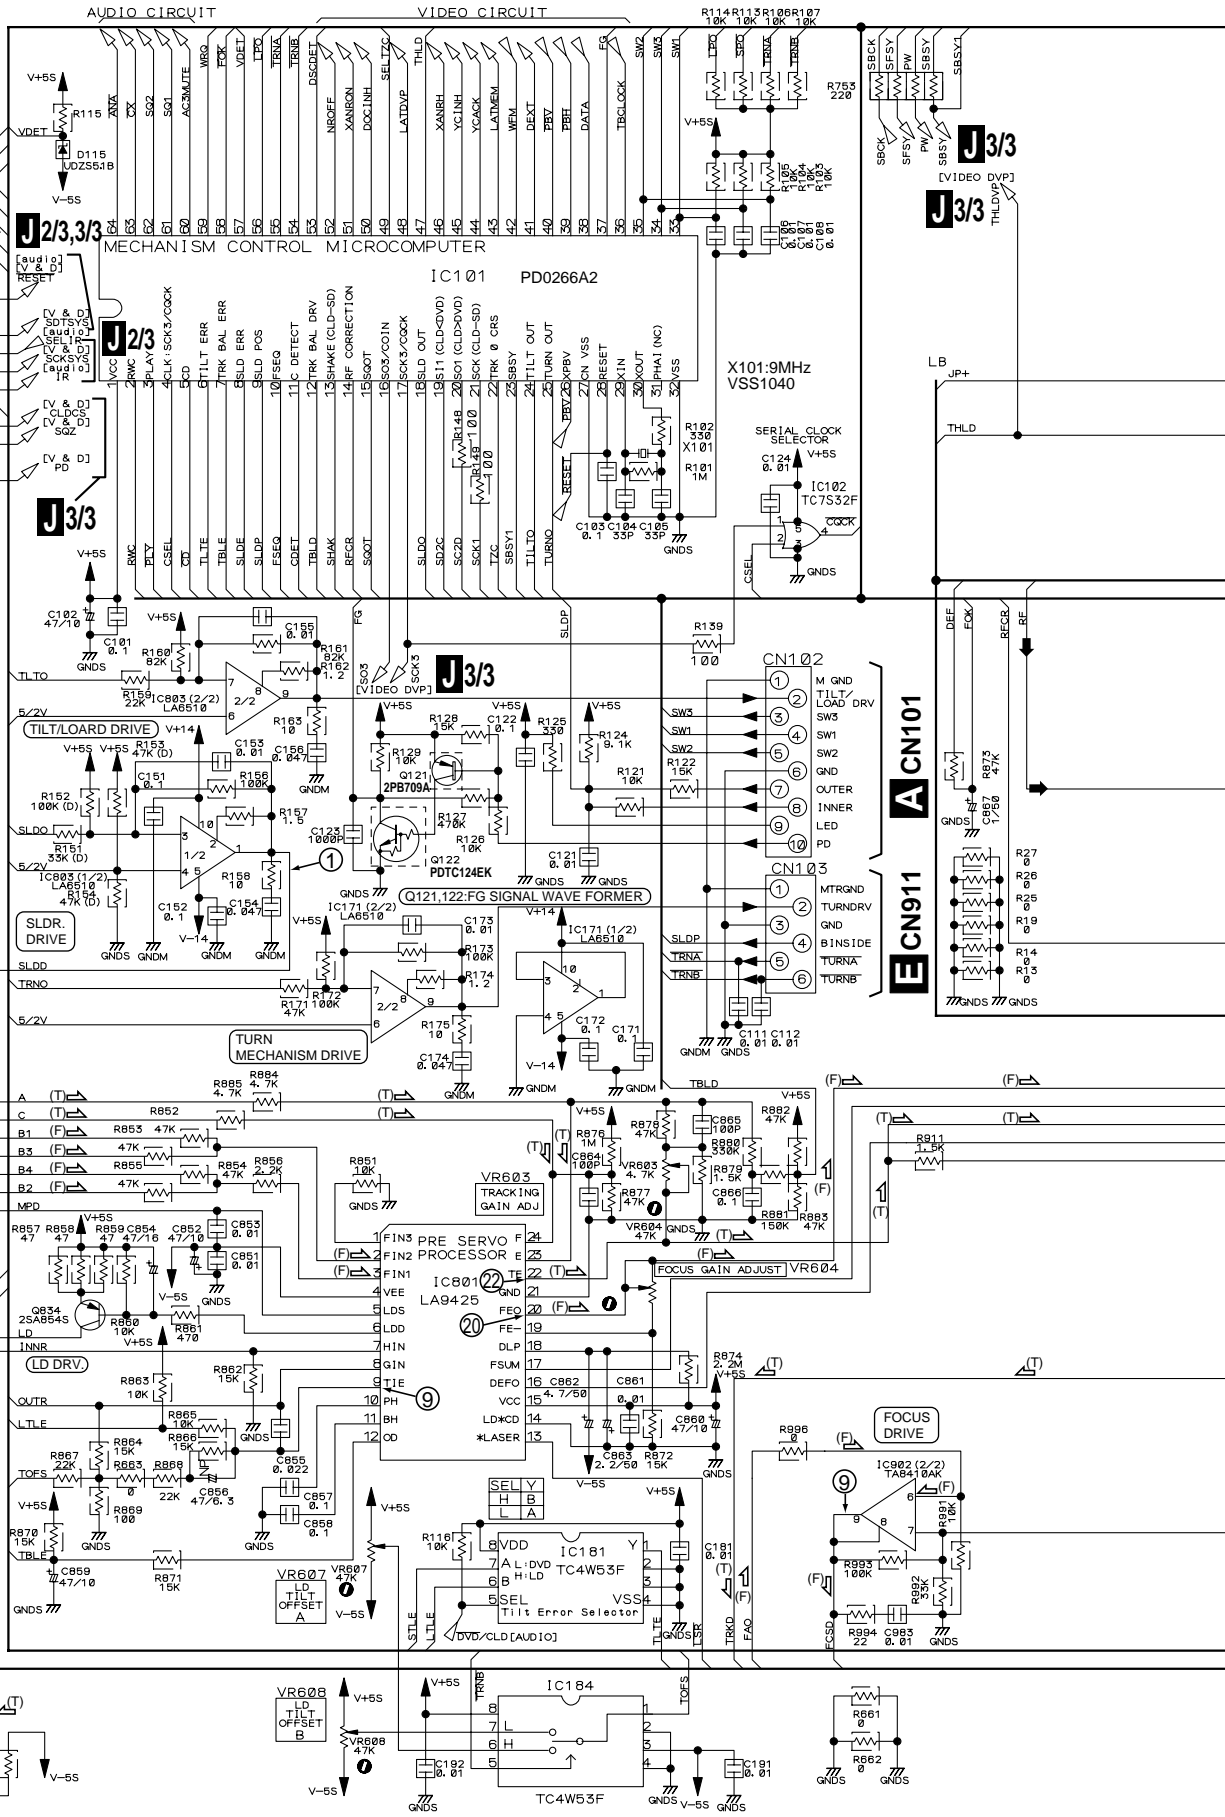


➔ : RF SIGNAL ROUTE
 ⇨ : AUDIO SIGNAL ROUTE
 Ⓜ : FOCUS SERVO LOOP LINE
 Ⓜ : TRACKING SERVO LOOP LINE

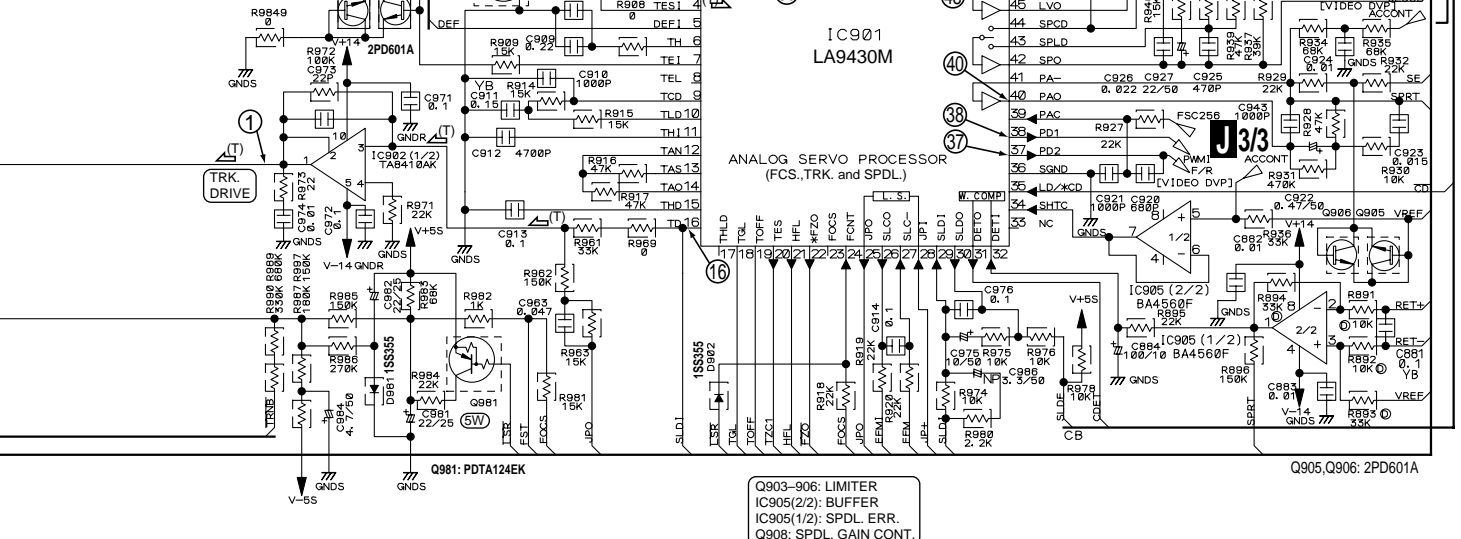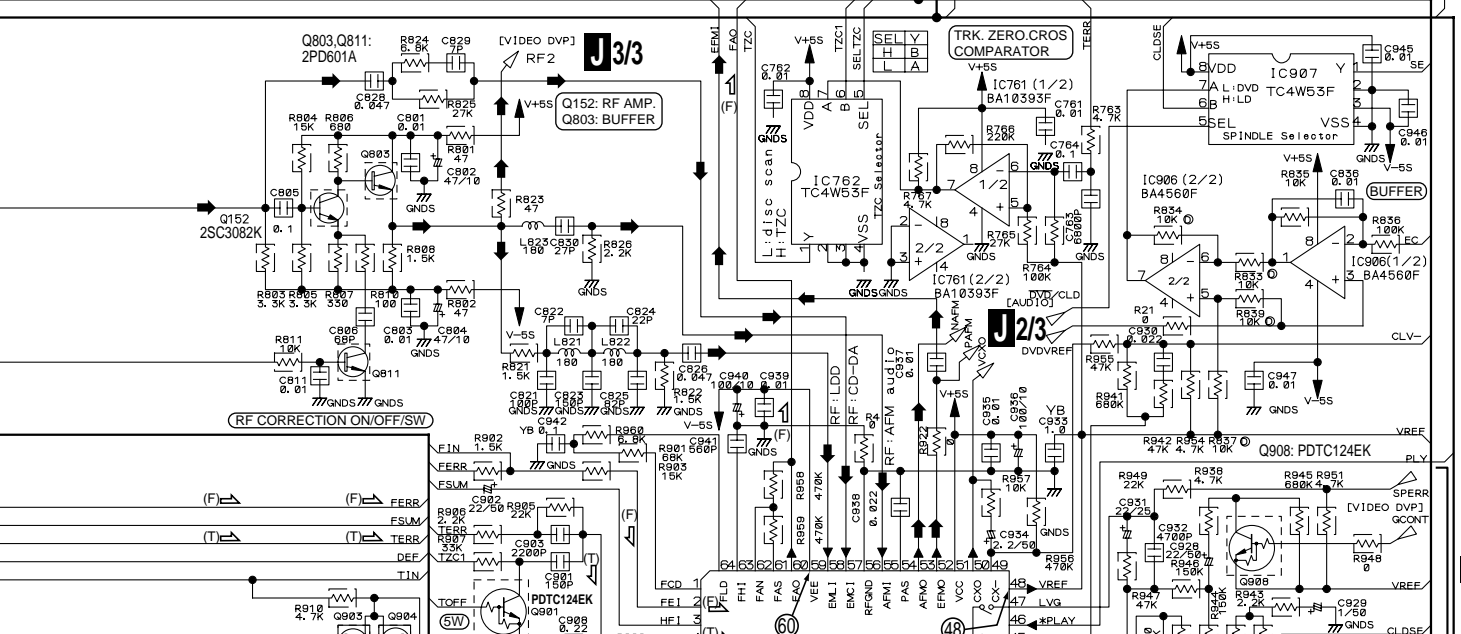
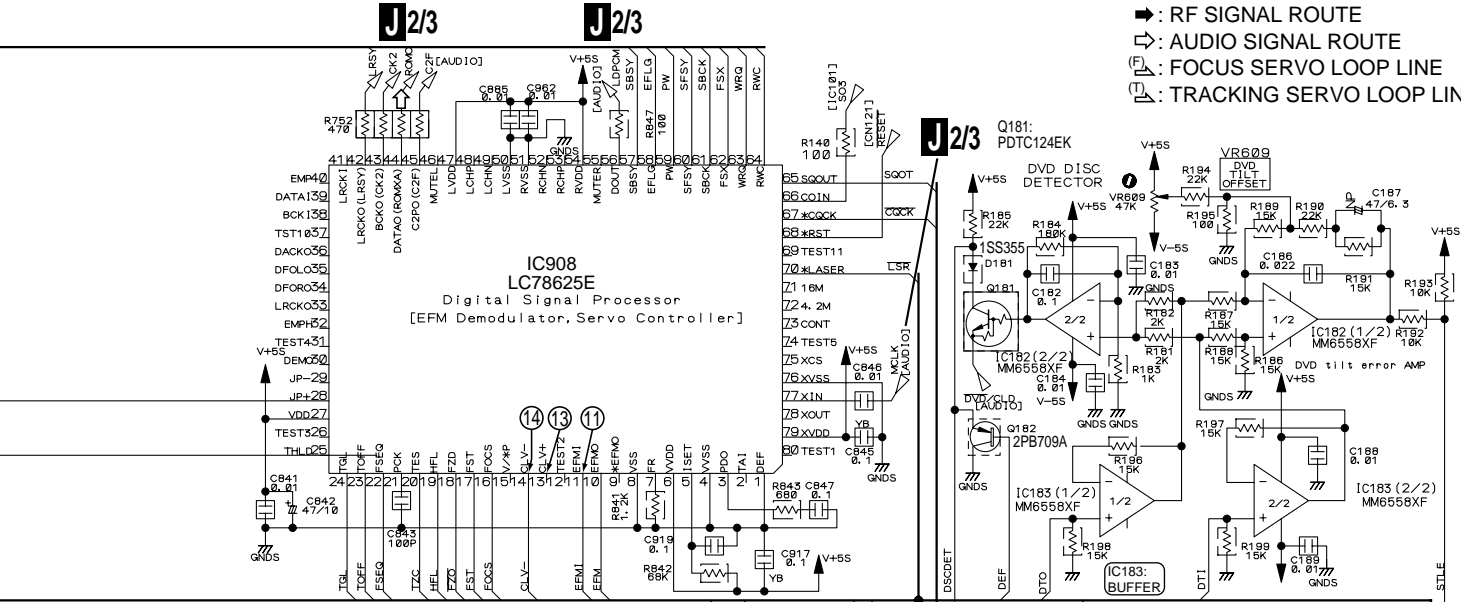


AB



A

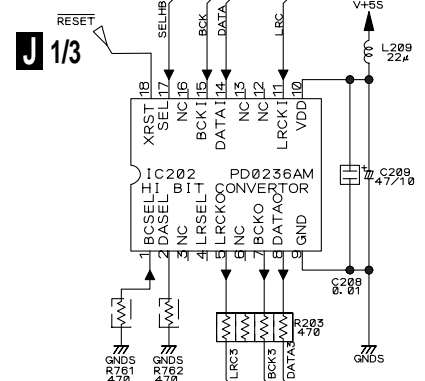

B

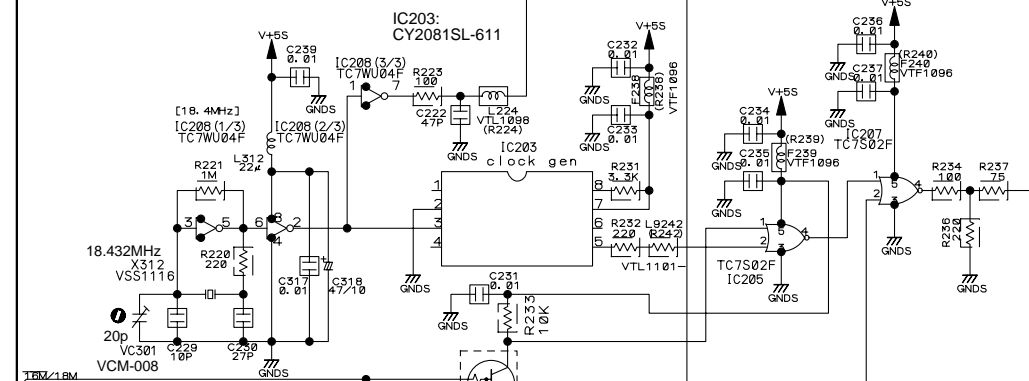


C

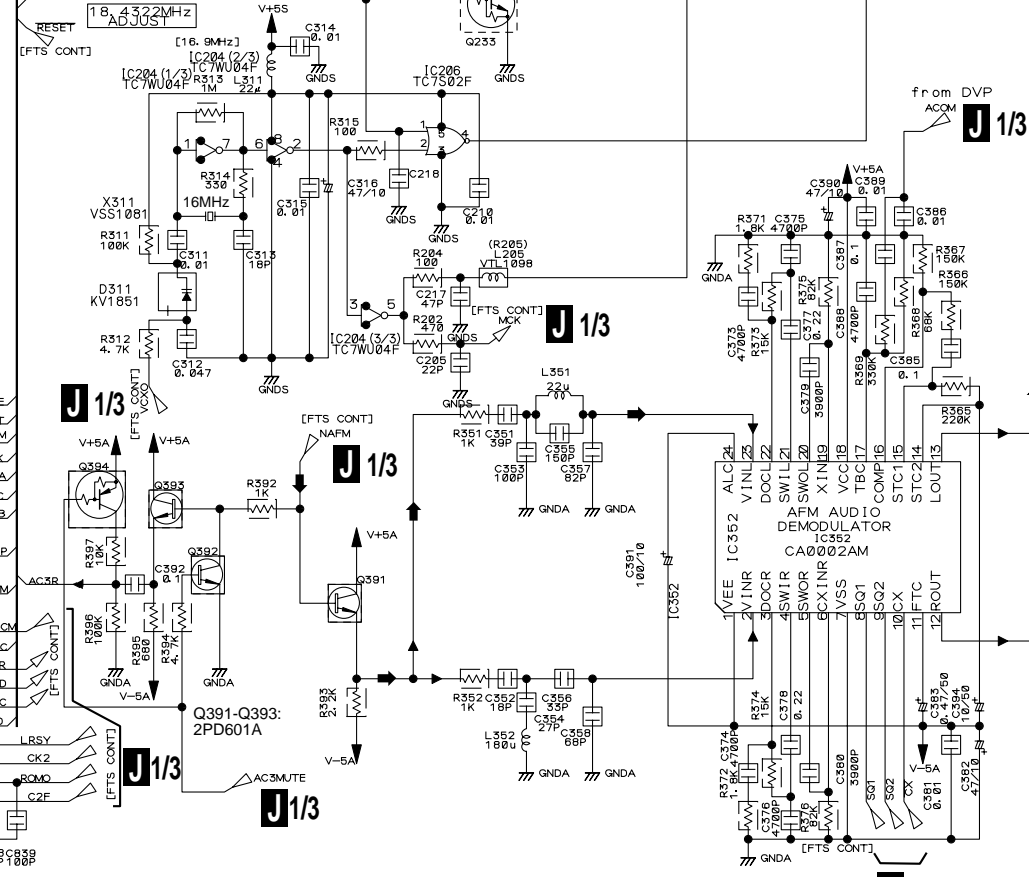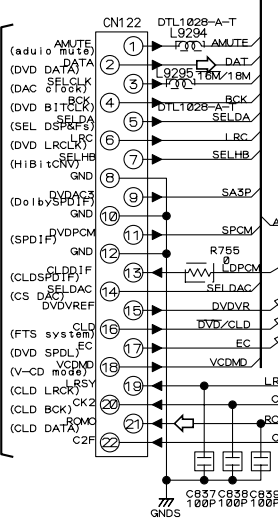

D

J 2/3 CLDM ASSY (VWS1358)


➔ : RF SIGNAL ROUTE
⇨ : AUDIO SIGNAL ROUTE

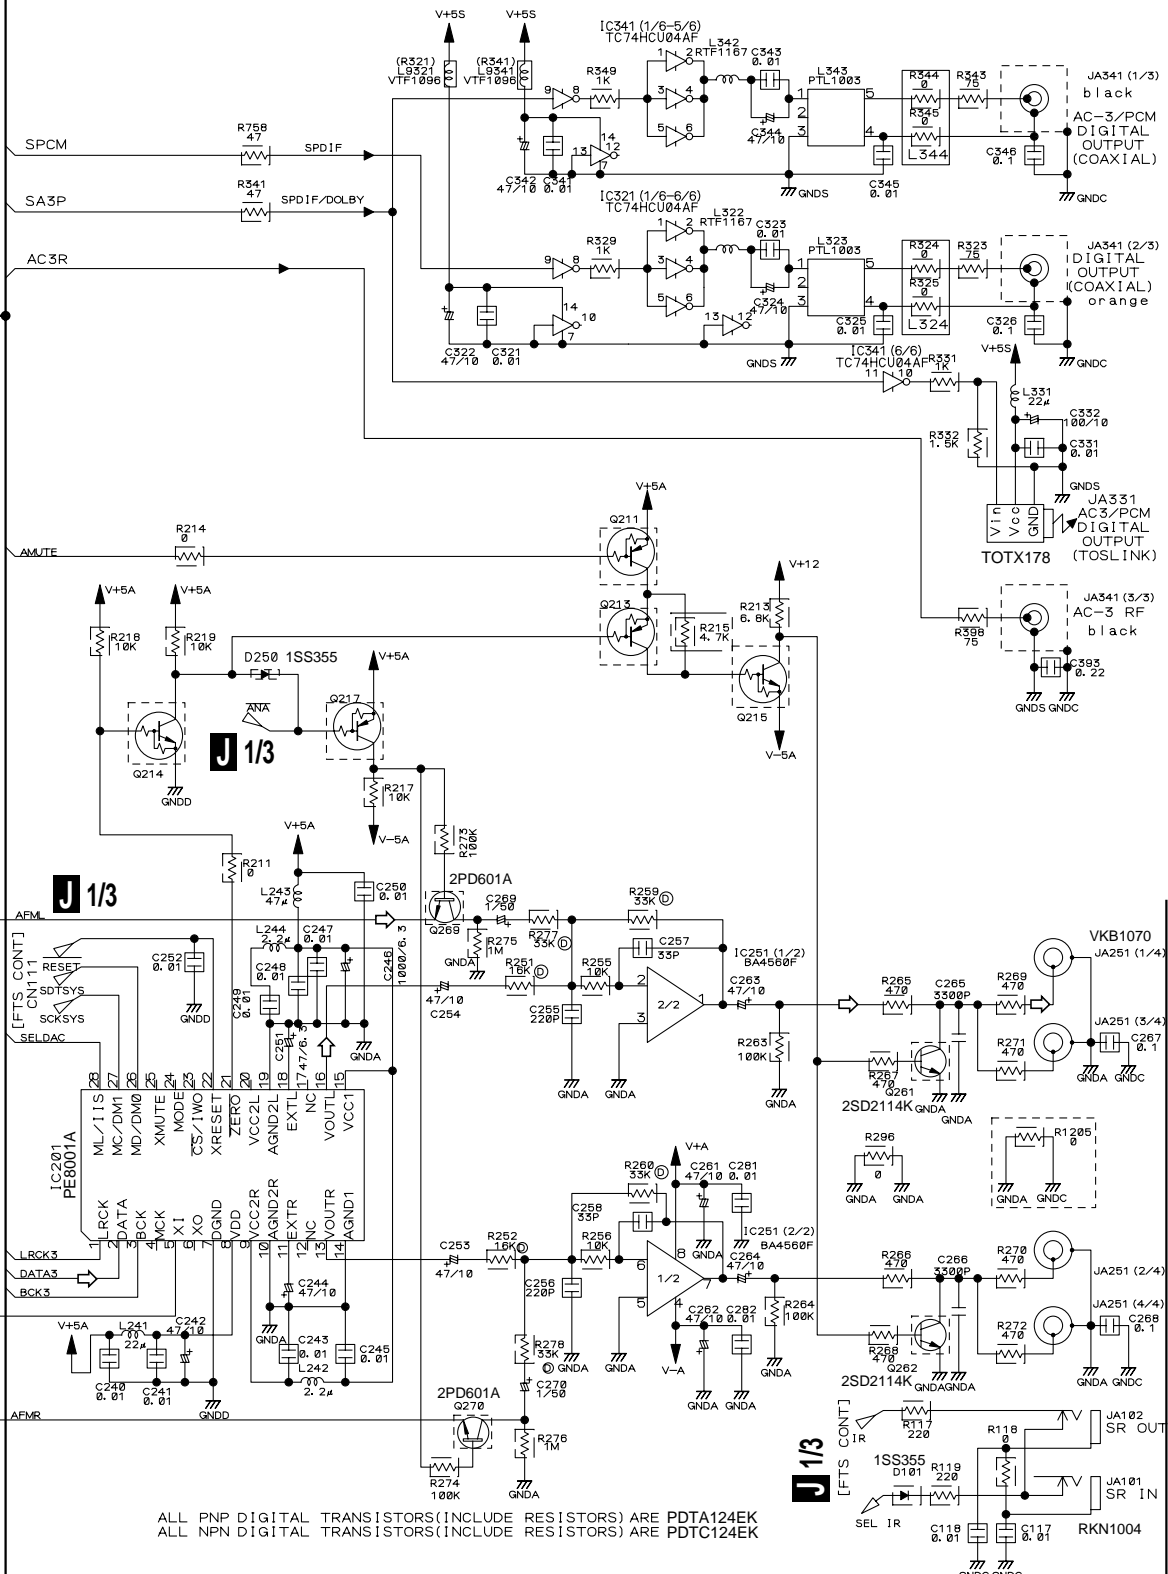


ALL PNP DIGITAL TRANSISTORS(INCLUDE RESISTORS) ARE PDTA124EK
ALL NPN DIGITAL TRANSISTORS(INCLUDE RESISTORS) ARE PDTC124EK

K 1/2 CN401

J 3/3 CLDM ASSY (VWS1358)

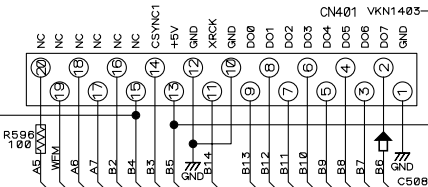

➡ : RF SIGNAL ROUTE
 ⇨ : VIDEO SIGNAL ROUTE

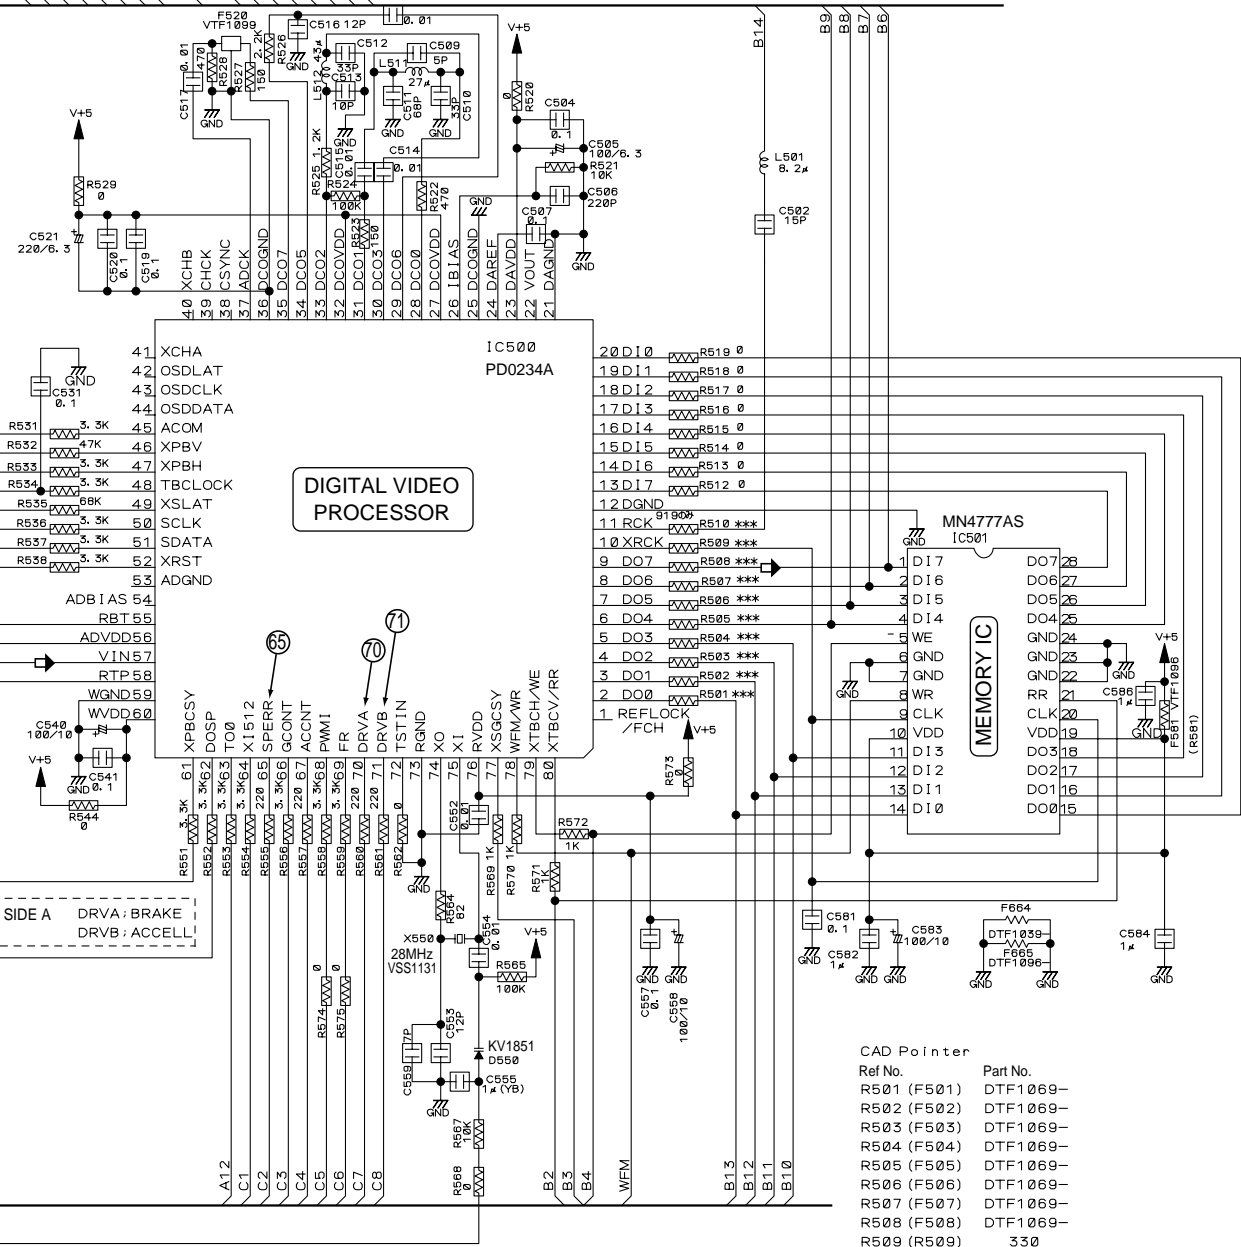

SIDE A DRVA : BRAKE
 DRVB : ACCELL

CAD Pointer

Ref No.	Part No.
R501 (F501)	DTF1069-
R502 (F502)	DTF1069-
R503 (F503)	DTF1069-
R504 (F504)	DTF1069-
R505 (F505)	DTF1069-
R506 (F506)	DTF1069-
R507 (F507)	DTF1069-
R508 (F508)	DTF1069-
R509 (R509)	330
R510 (R510)	680
R511 (R511)	

3.8 GYCB ASSY (1/2)



J 3/3 CN401

A

B

C




D

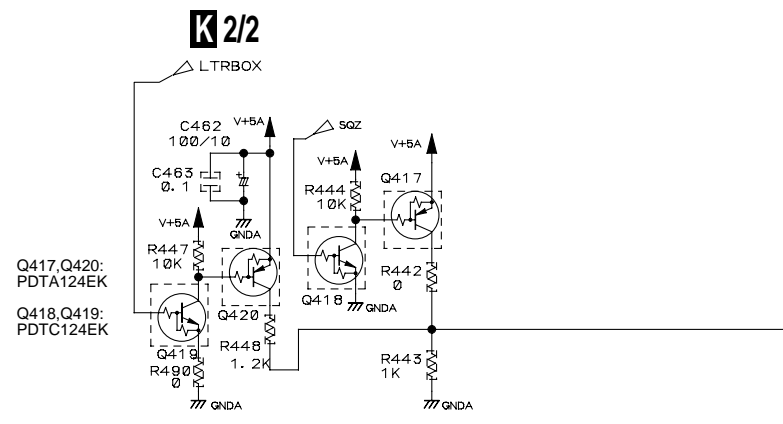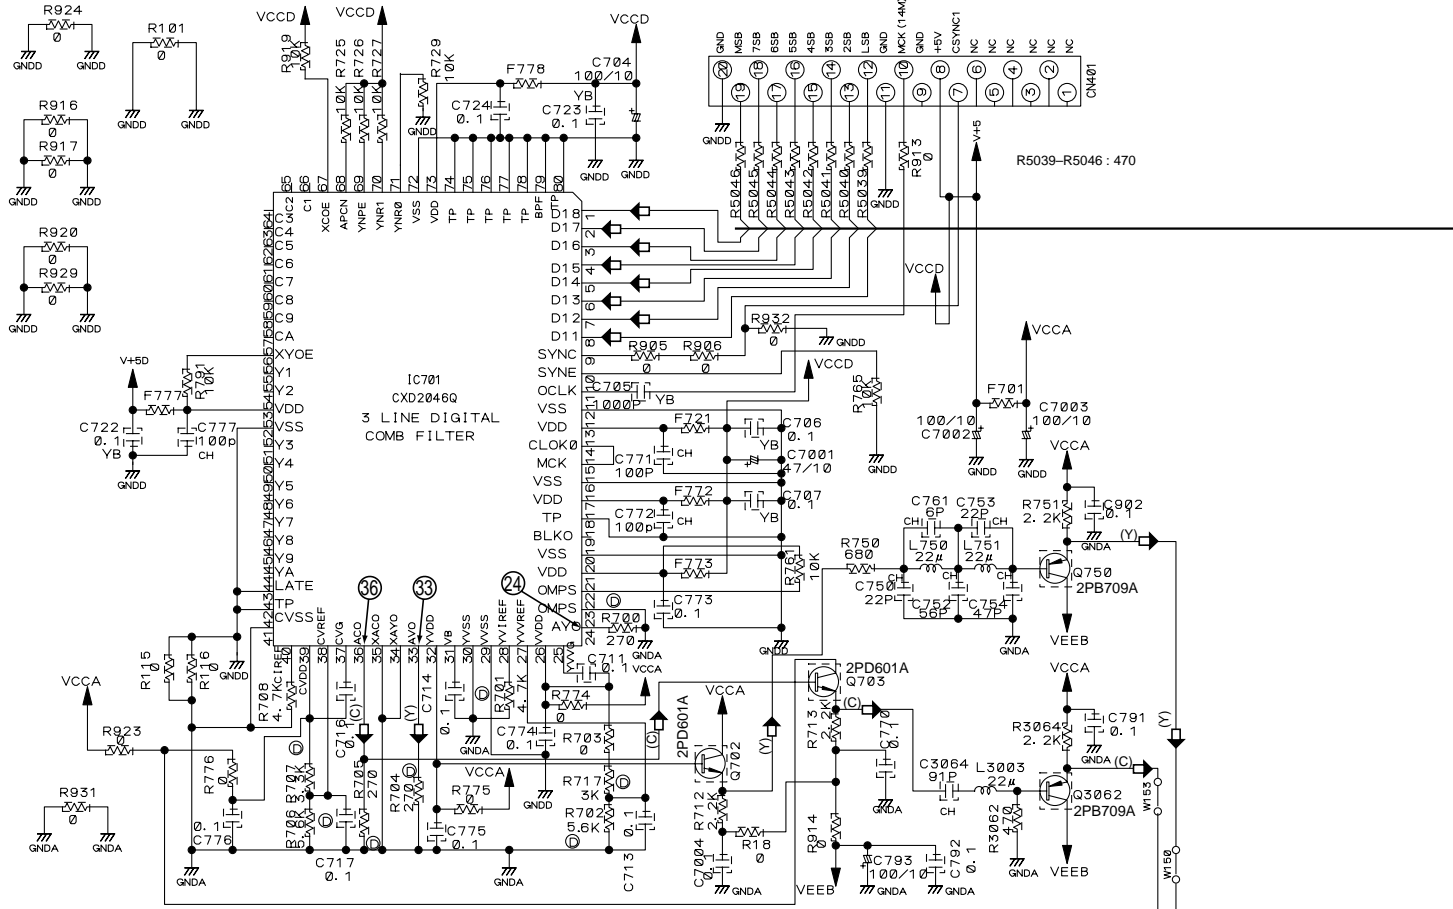

J 3/3 CN402

K 1/2 GYCB ASSY (VWV1633)


K 2/2

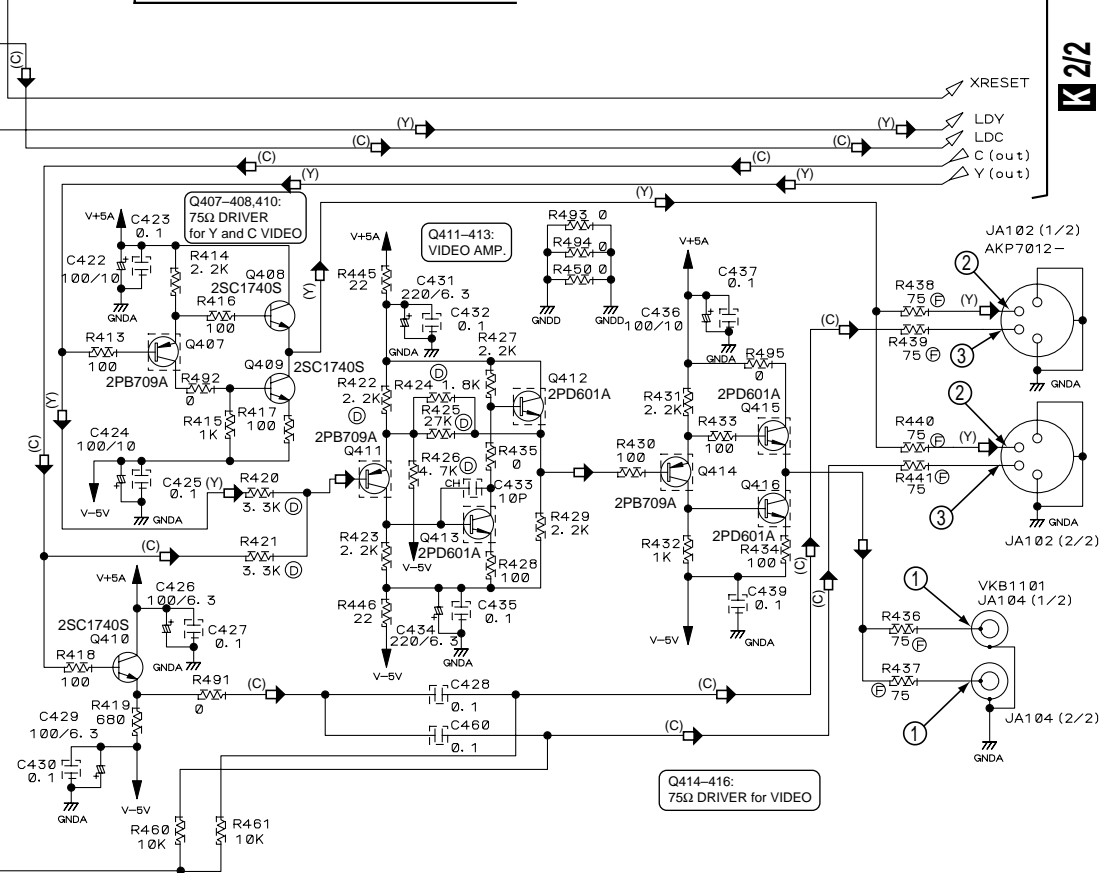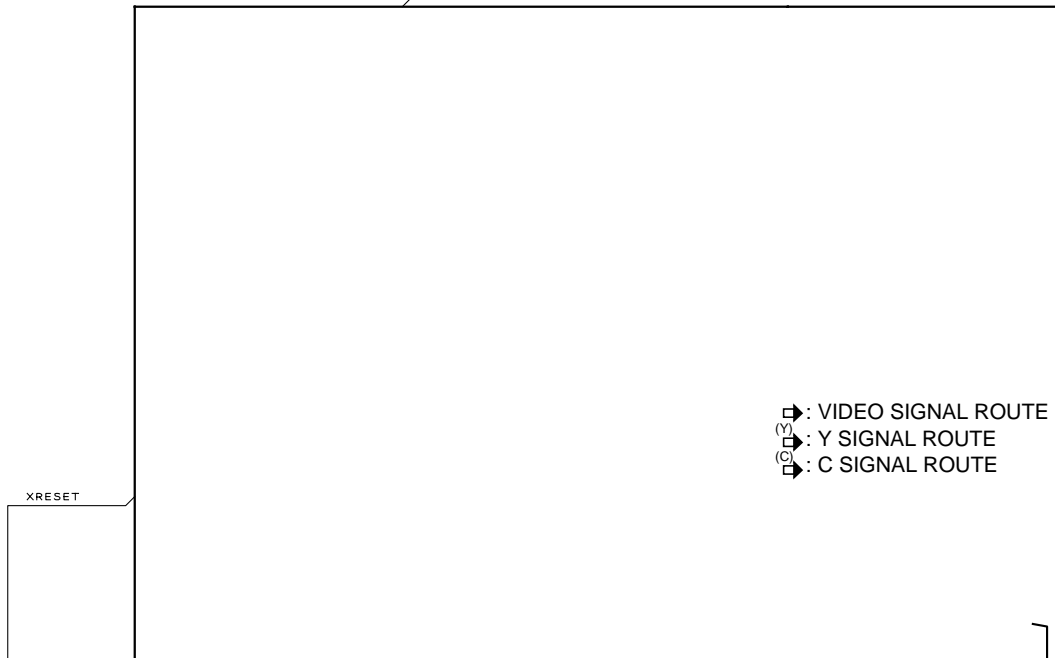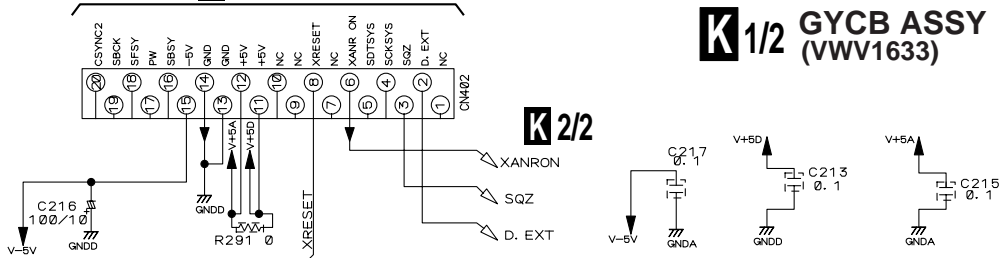

K 1/2



3.9 GYCB ASSY (2/2)

K2/2 GYCB ASSY (VWV1633)

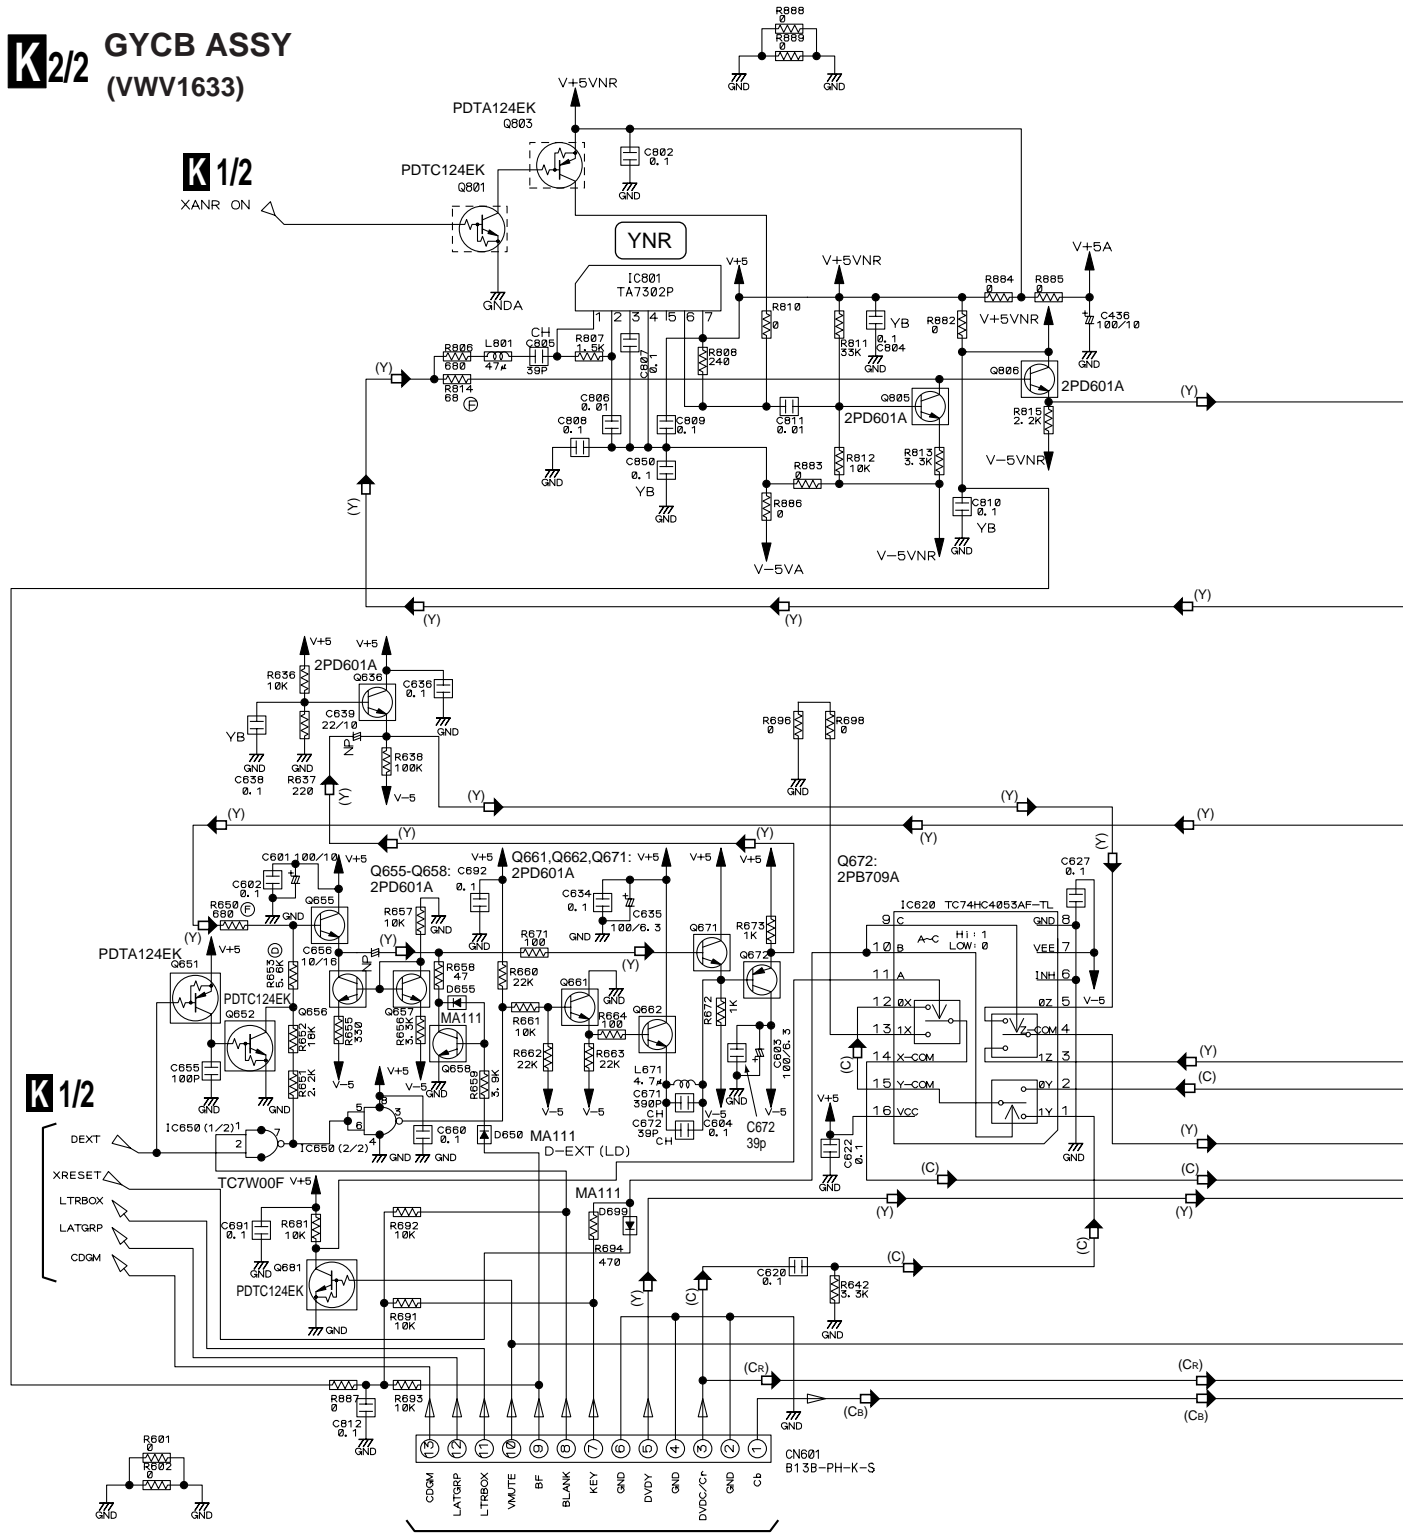

K3/3 CN903


(Cb) : COMPONENT VIDEO SIGNAL ROUTE (Cb)
 (Cr) : COMPONENT VIDEO SIGNAL ROUTE (Cr)
 (Y) : Y SIGNAL ROUTE
 (C) : C SIGNAL ROUTE

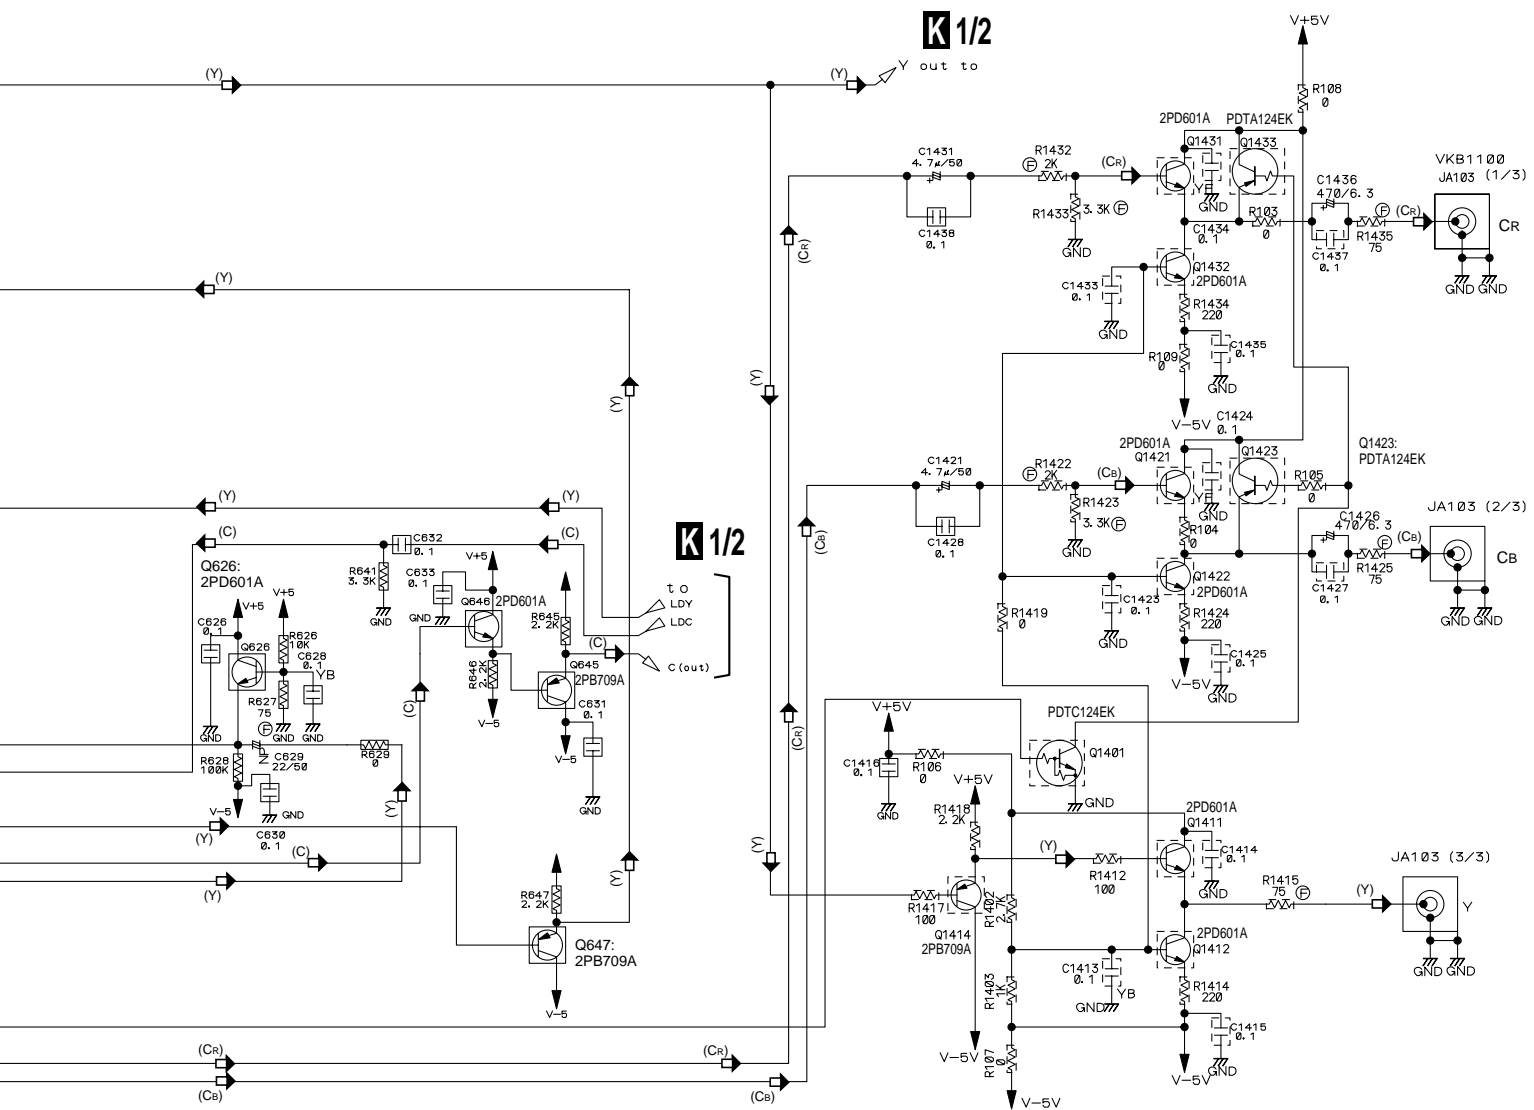

Q1411, Q1412, Q1421, Q1422, Q1431, Q1432
 : 75Ω DRIVER for COMPONENT VIDEO OUT (Y, Cb, Cr)

FLKY ASSY

- S101 : Reverse ◀◀◀◀
- S102 : Foward ▶▶▶▶
- S103 : Stop ■
- S104 : Play/Pause ▶/||
- S105 : Dimmer (FL DIMMER)
- S106 : Disc Side A/B

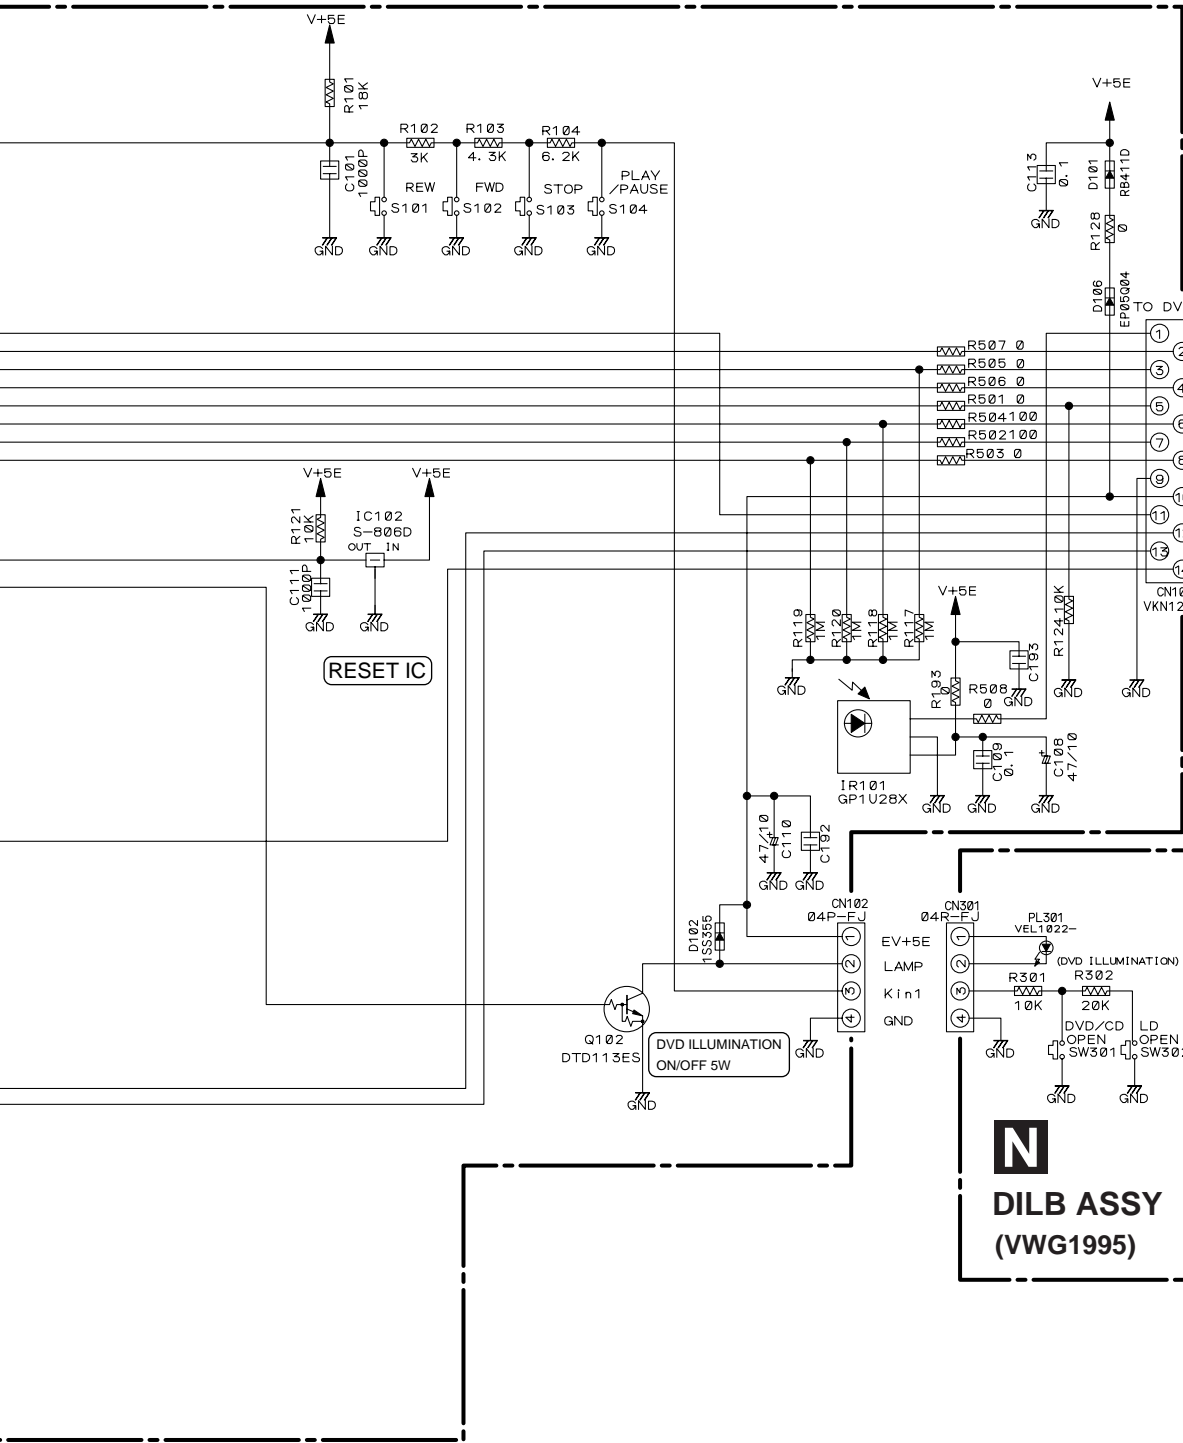

2/3
CN105


DILB ASSY
 S301 : DVD/CD open/close ▲
 S302 : LD open/close ▲

N
DILB ASSY
(VWG1995)

3.11 POWER SUPPLY ASSY


• FOR KU/CA TYPE

POWER SUPPLY ASSY (VWR1286)

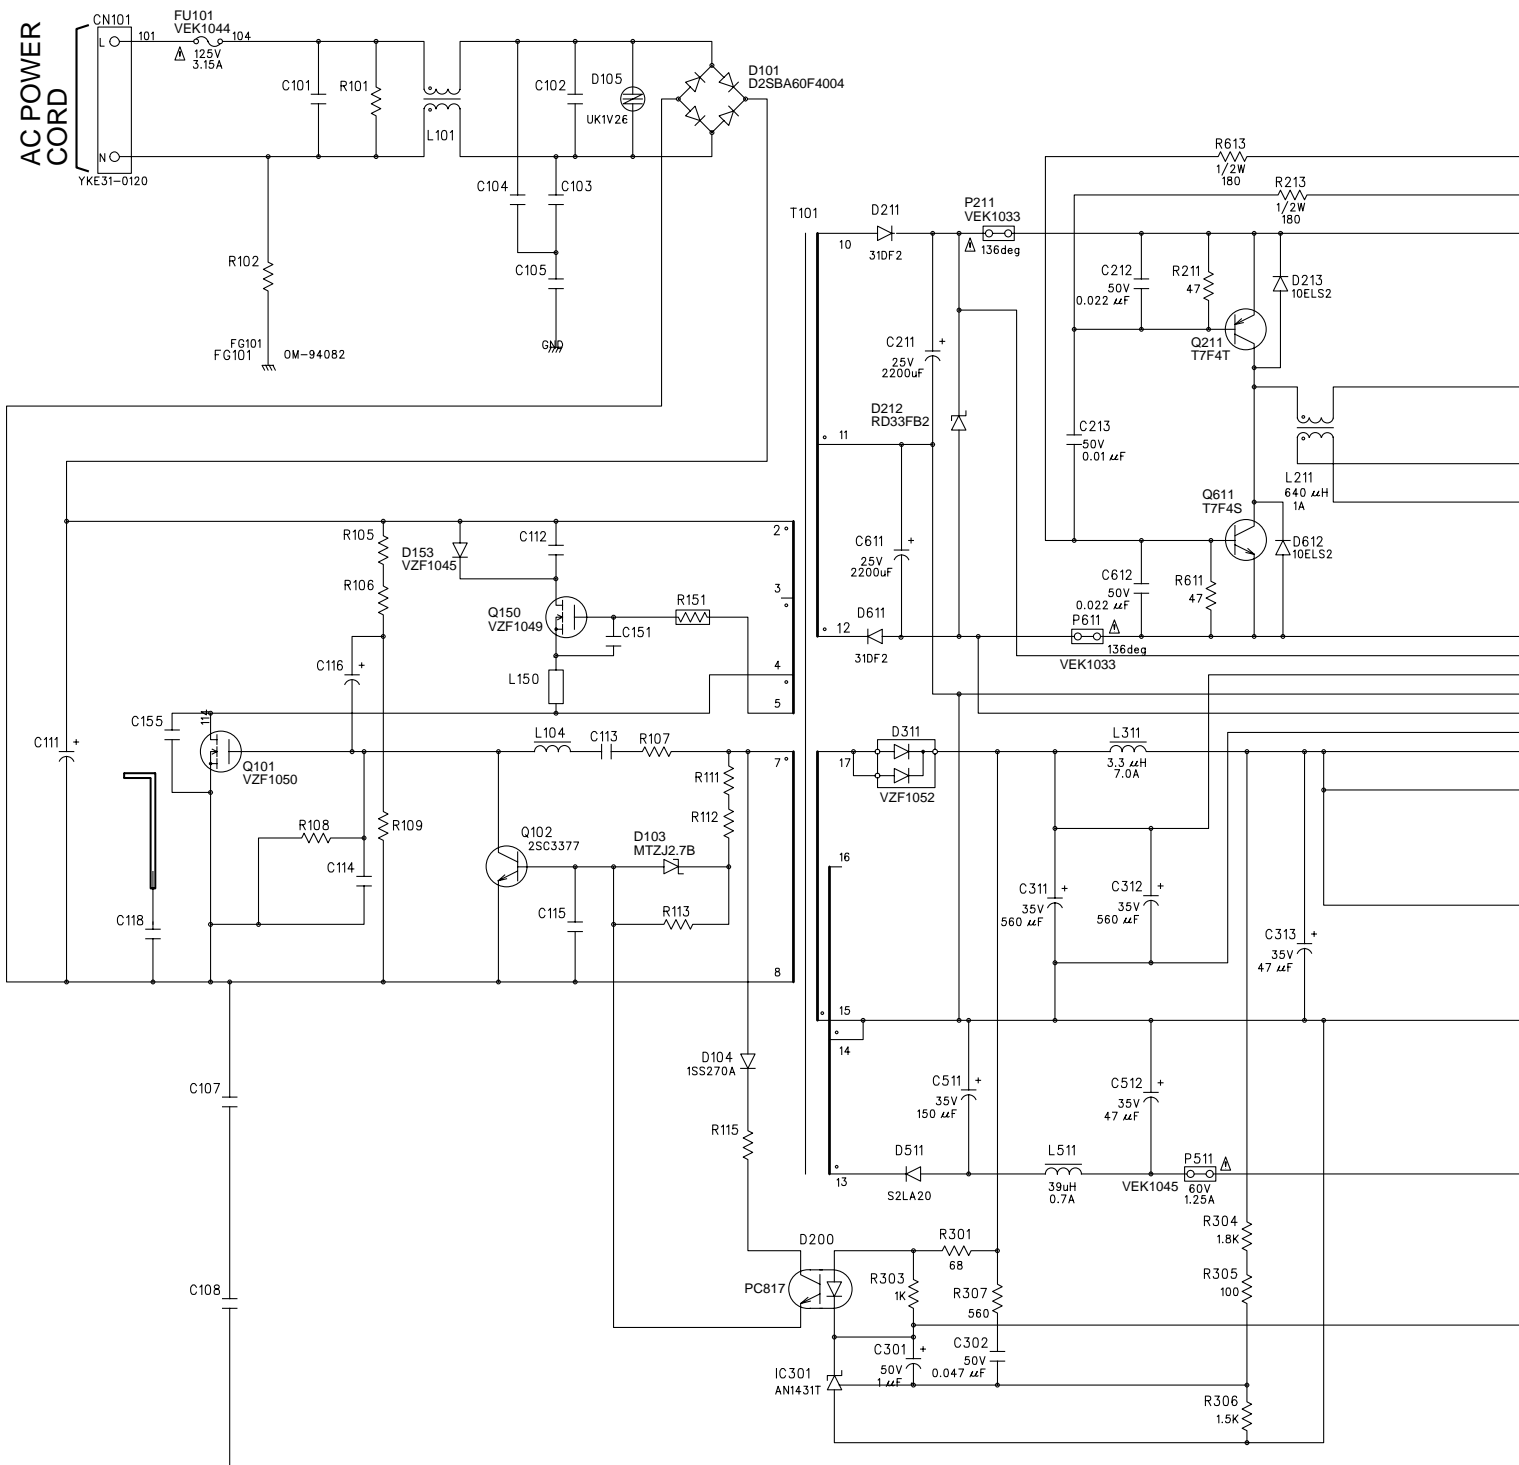

« NOTE OF SPARE PARTS IN POWER SUPPLY (SYPS) ASSY »

- In case of repairing, use the described parts only to prevent an accident.
- Please write the red ✓ mark on the board when the primary section of POWER SUPPLY (SYPS) Assy is repaired.
- Please take care to keep the space, not touching other parts when replacing the parts.

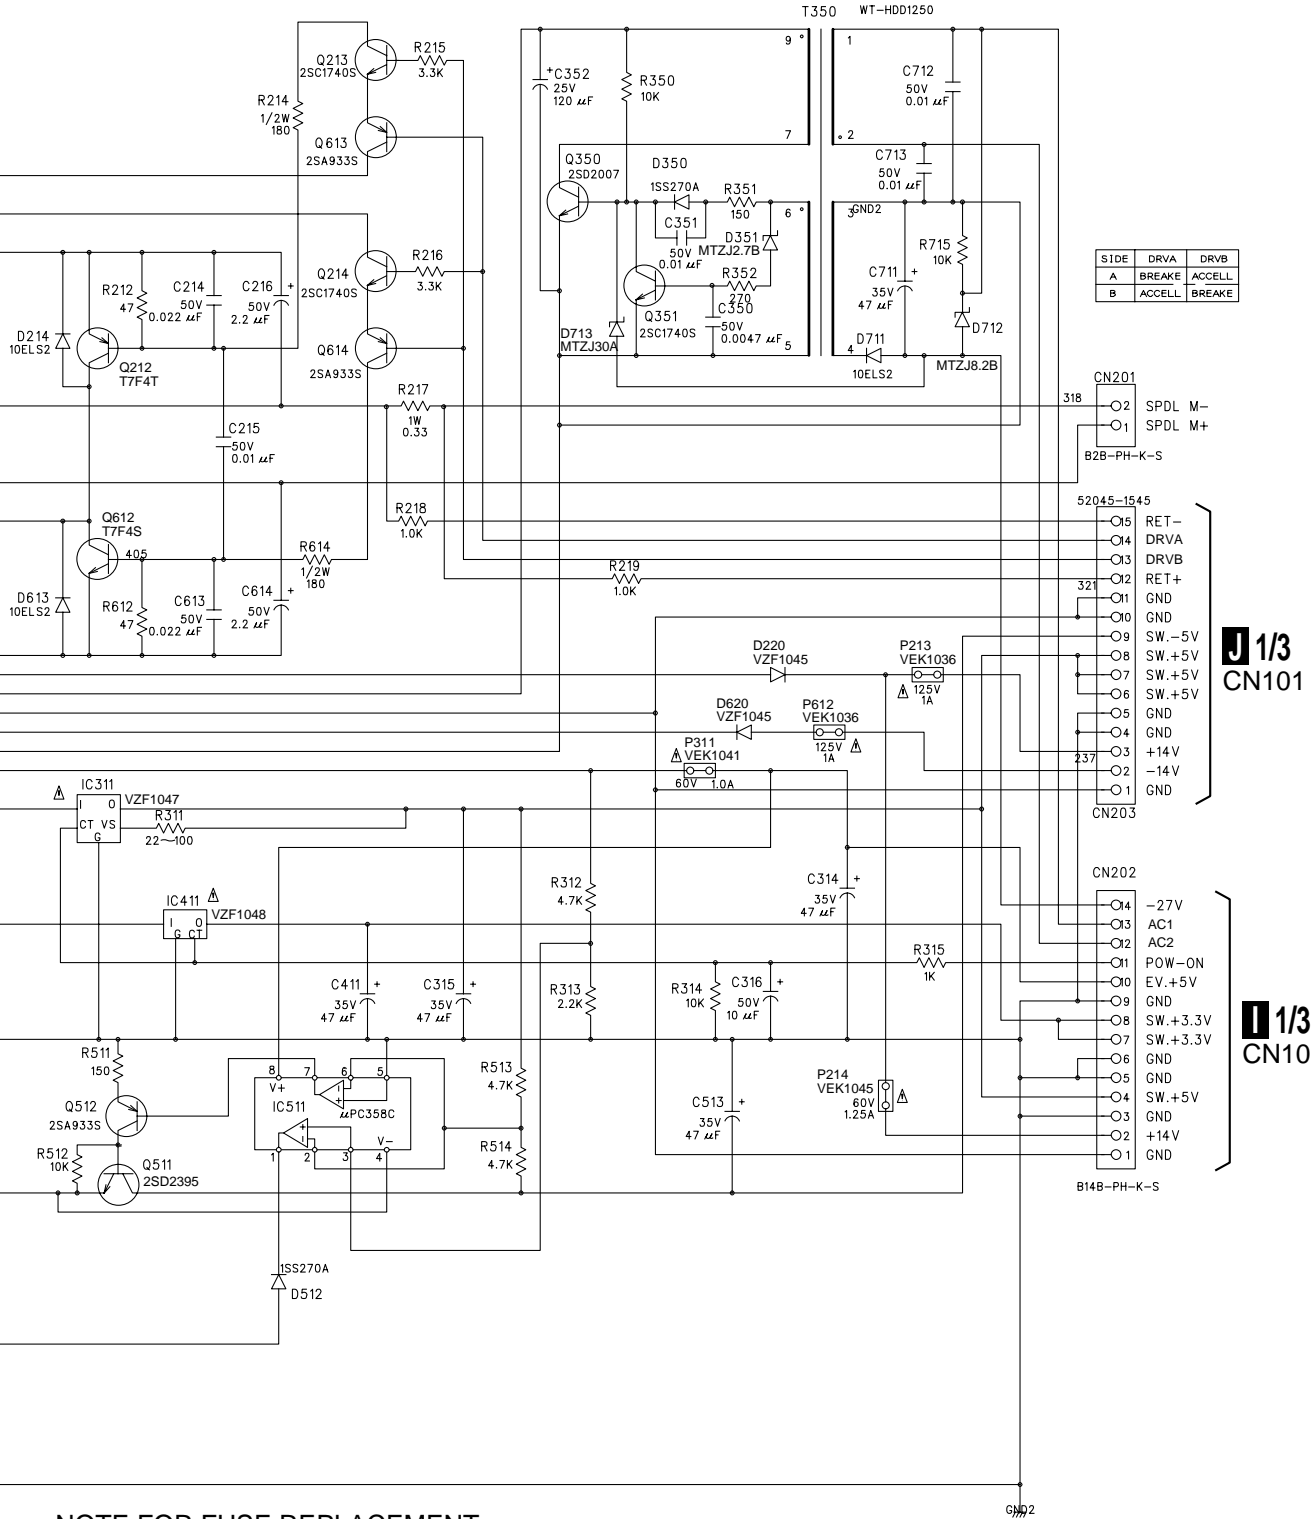


• NOTE FOR FUSE REPLACEMENT

CAUTION -FOR CONTINUED PROTECTION AGAINST RISK OF FIRE. REPLACE ONLY WITH SAME TYPE AND RATINGS ONLY.




• FOR RD/RA TYPE

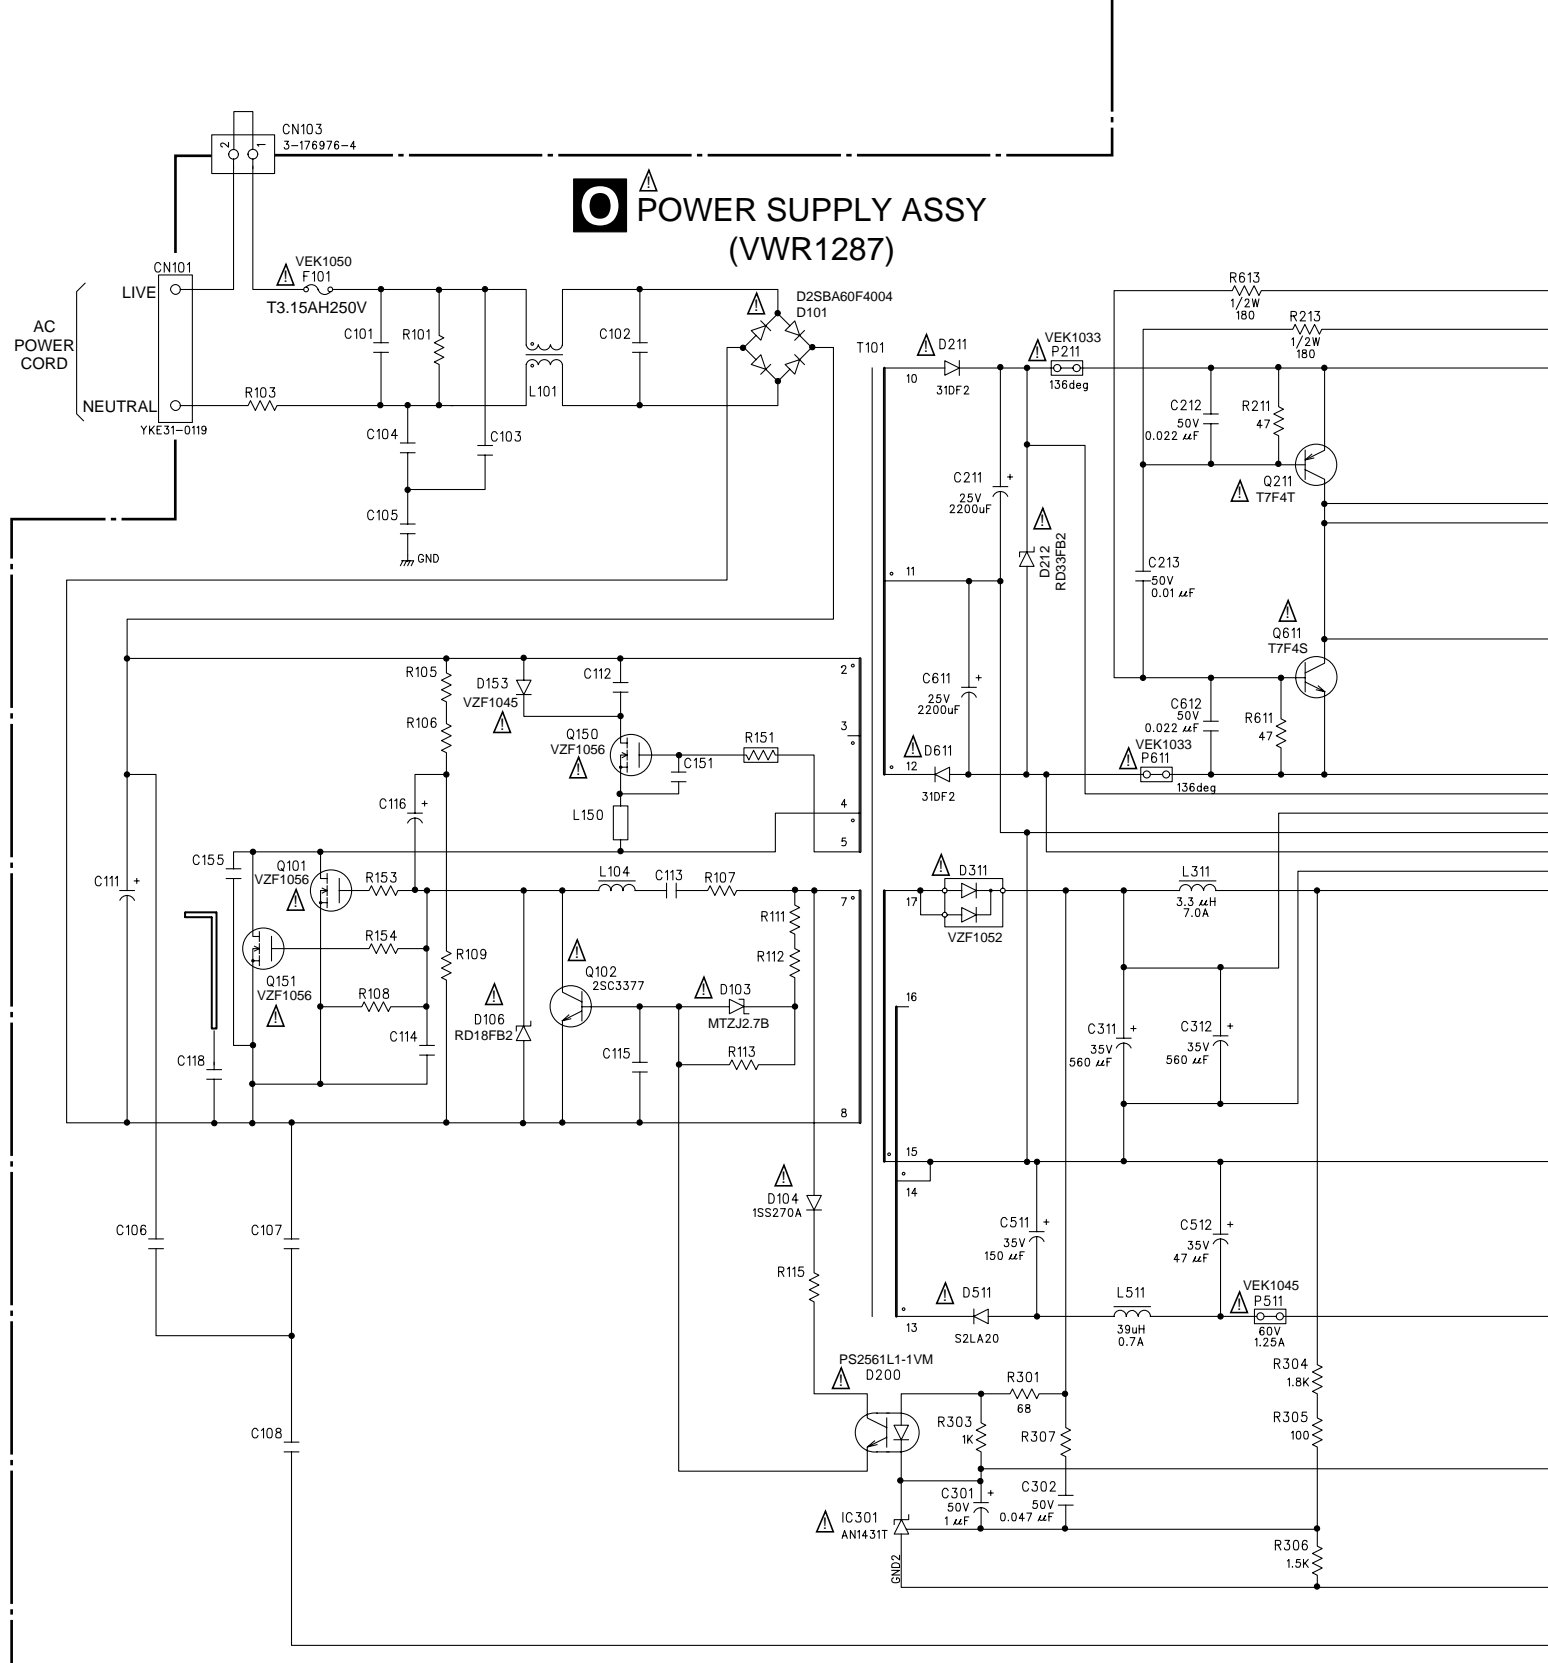

« NOTE ON SPARE PARTS IN POWER SUPPLY ASSY »

- In case of repairing, use the described parts only to prevent an accident.
- Write the red ✓ mark on the board when the primary section of POWER SUPPLY Assy is repaired.
- Take care to keep the space, not touching other parts when replacing the parts.

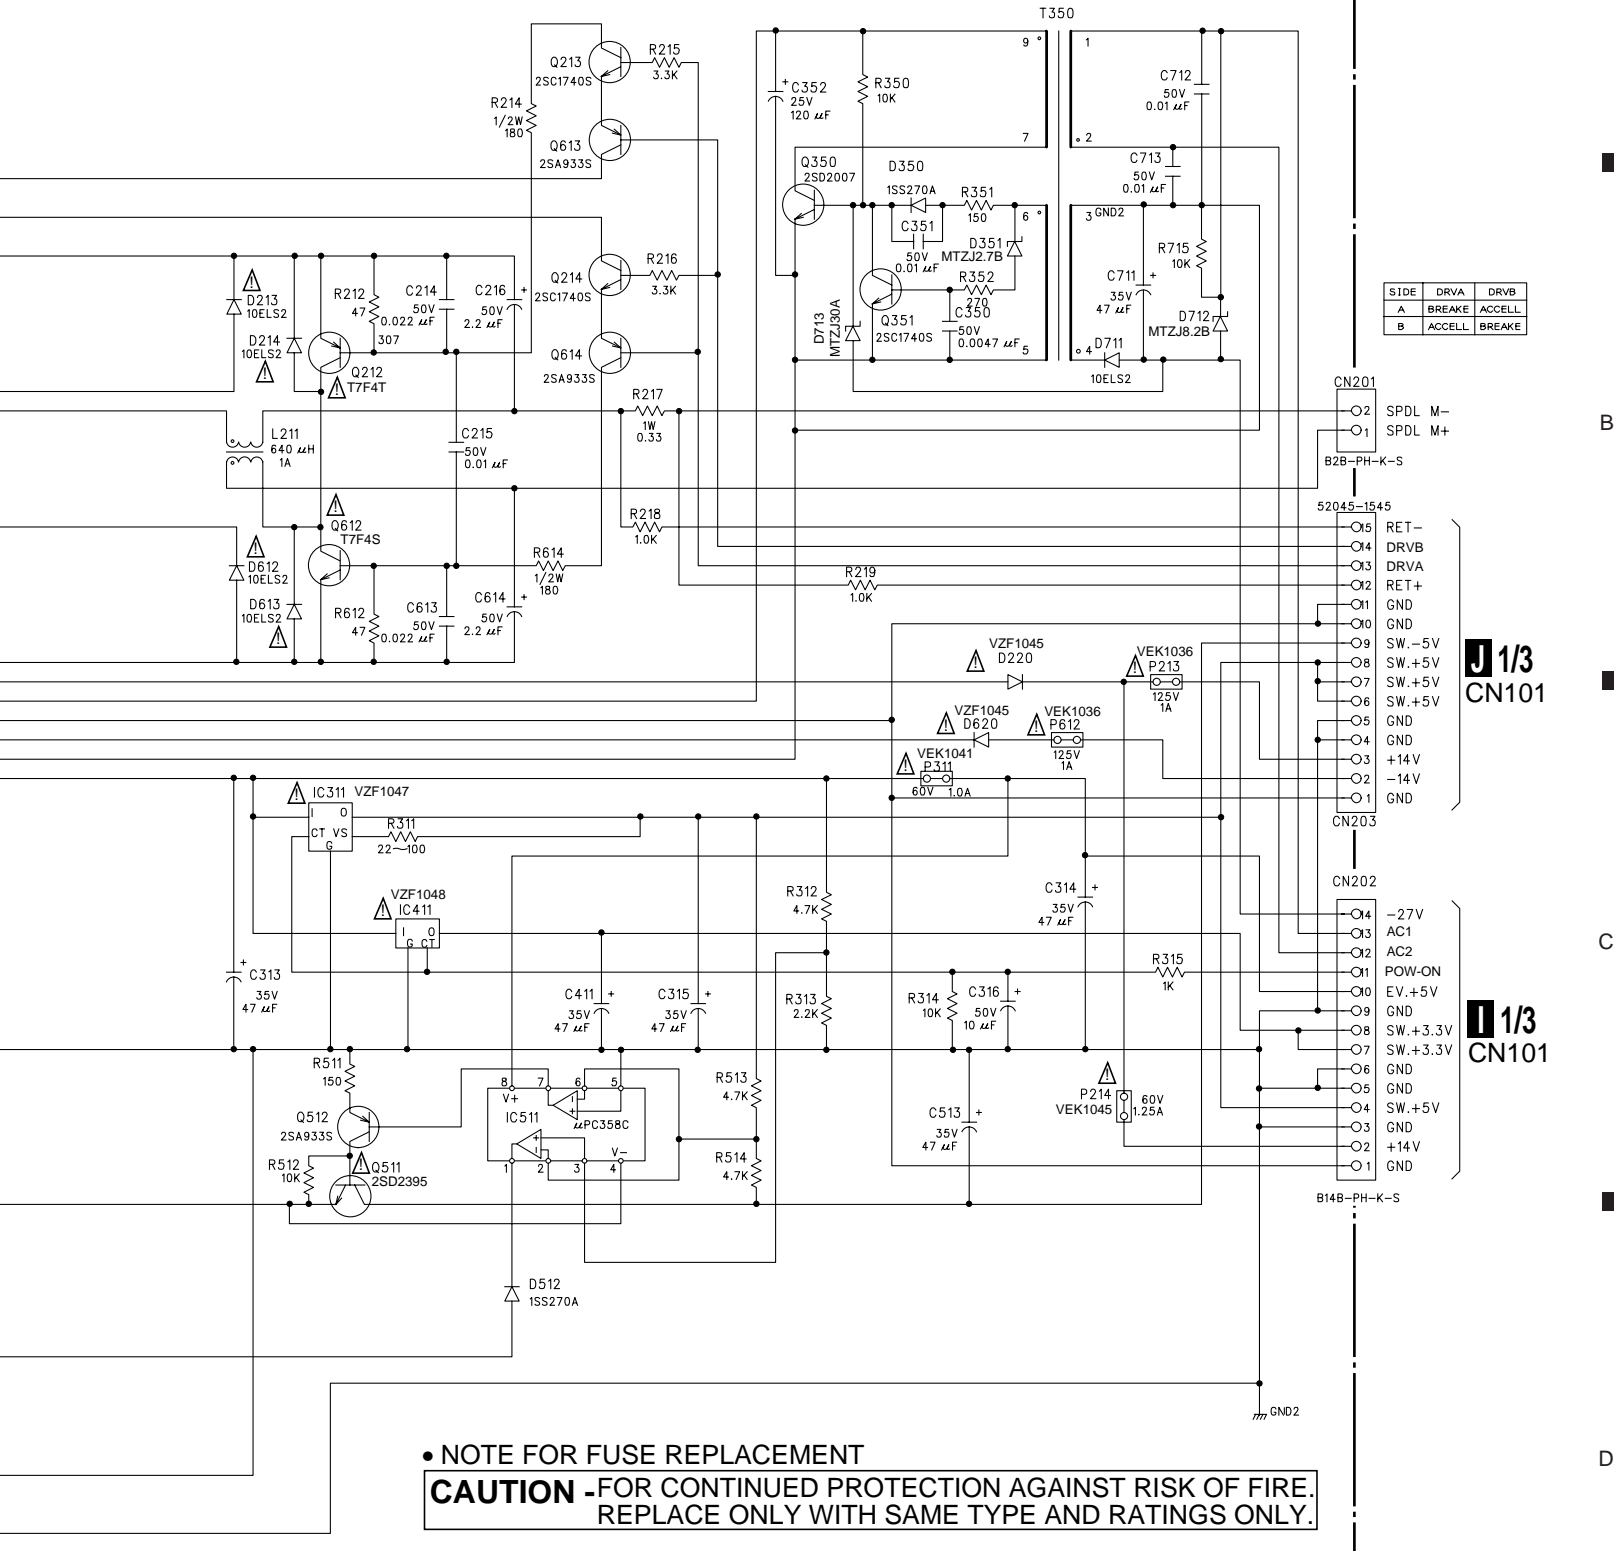


● WAVEFORMS AND VOLTAGES


Note : (No.) in the table correspond to the pin number.

Measurement condition : In case when (D.audio) is written, at time when disc that has digital audio recording is played.

CLDM ASSY

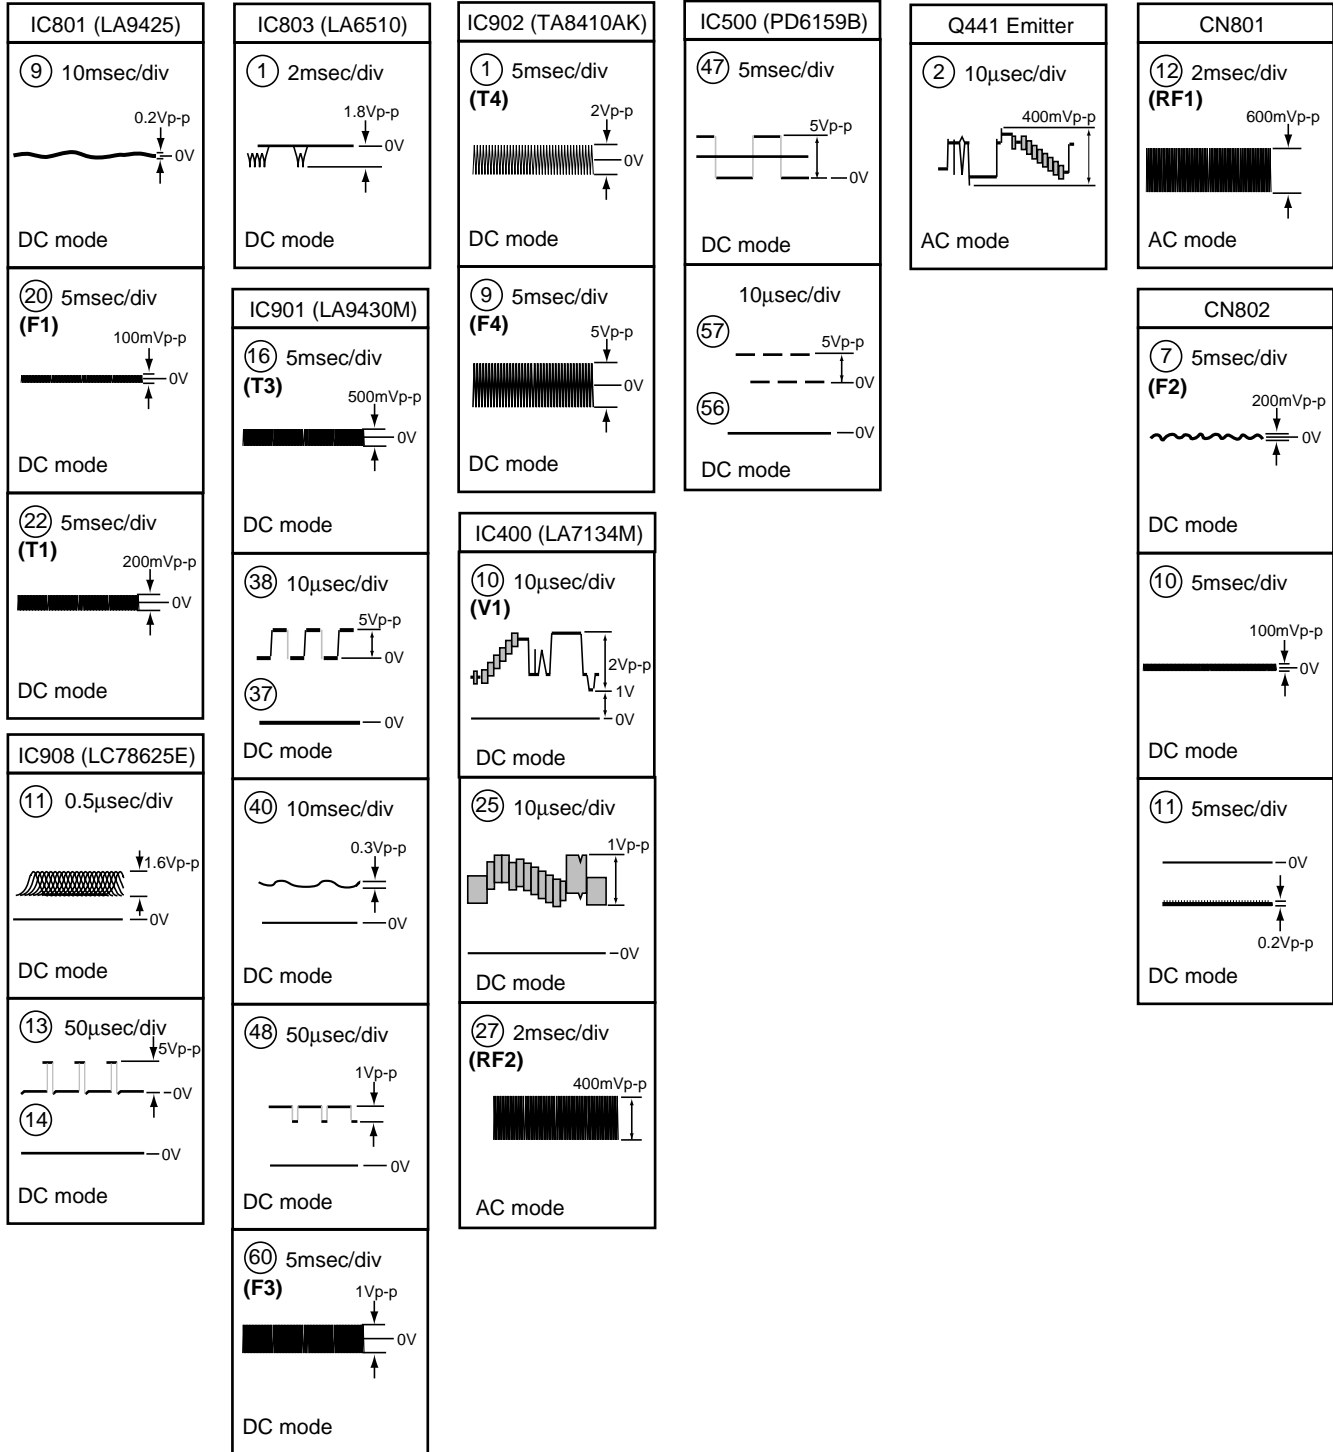

GYCB ASSY

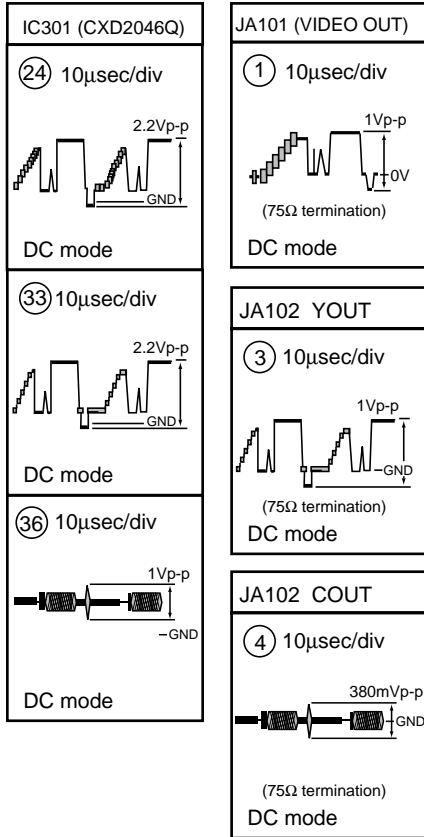


4. PCB CONNECTION DIAGRAM

NOTE FOR PCB DIAGRAMS :


1. Part numbers in PCB diagrams match those in the schematic diagrams.
2. A comparison between the main parts of PCB and schematic diagrams is shown below.

3. The parts mounted on this PCB include all necessary parts for several destinations.
4. View point of PCB diagrams.

Symbol In PCB Diagrams	Symbol In Schematic Diagrams	Part Name
		Transistor
		Transistor with resistor
		Field effect transistor
		Resistor array
		3-terminal regulator

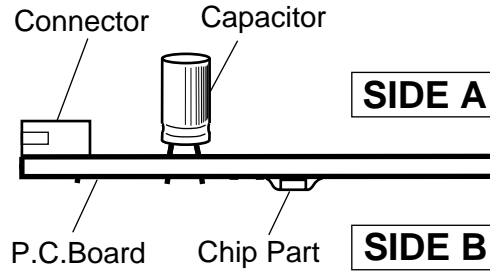

4.1 LMSB, PKSB and FG ASSEMBLIES

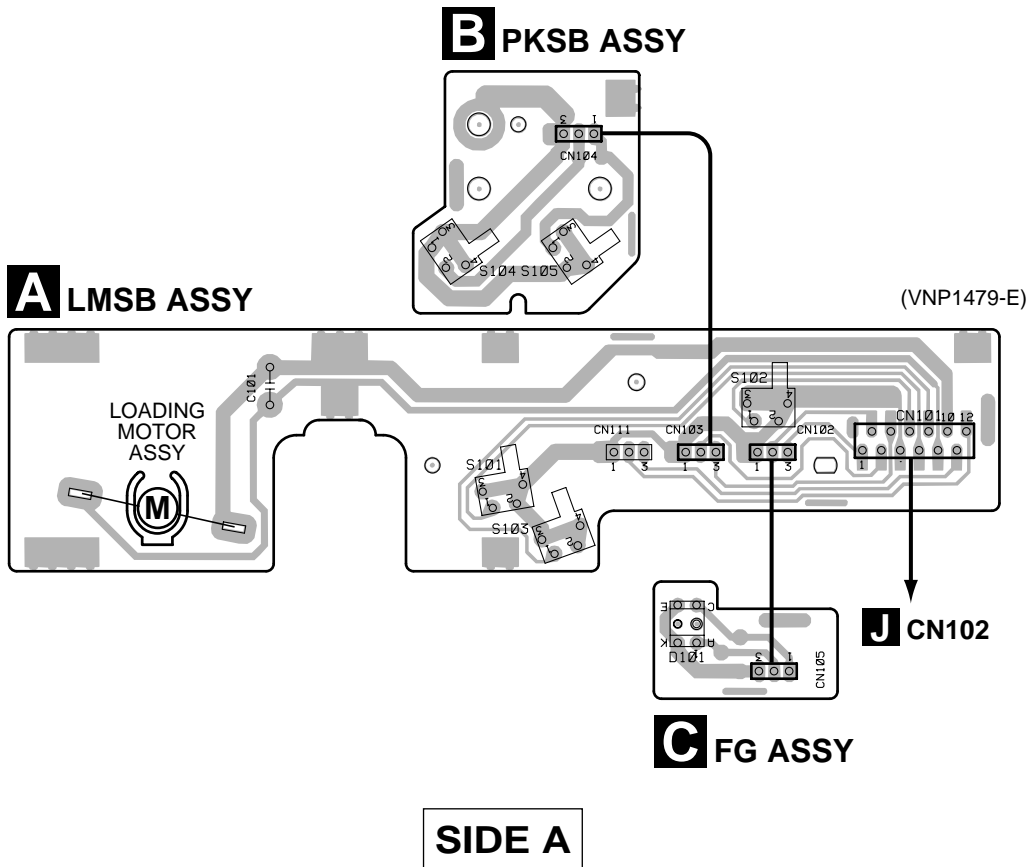

4.3 DVDM ASSY


• This PCB is a four-layered board. Middle layer is mainly connected to Vcc and GND.

A

B

C

D

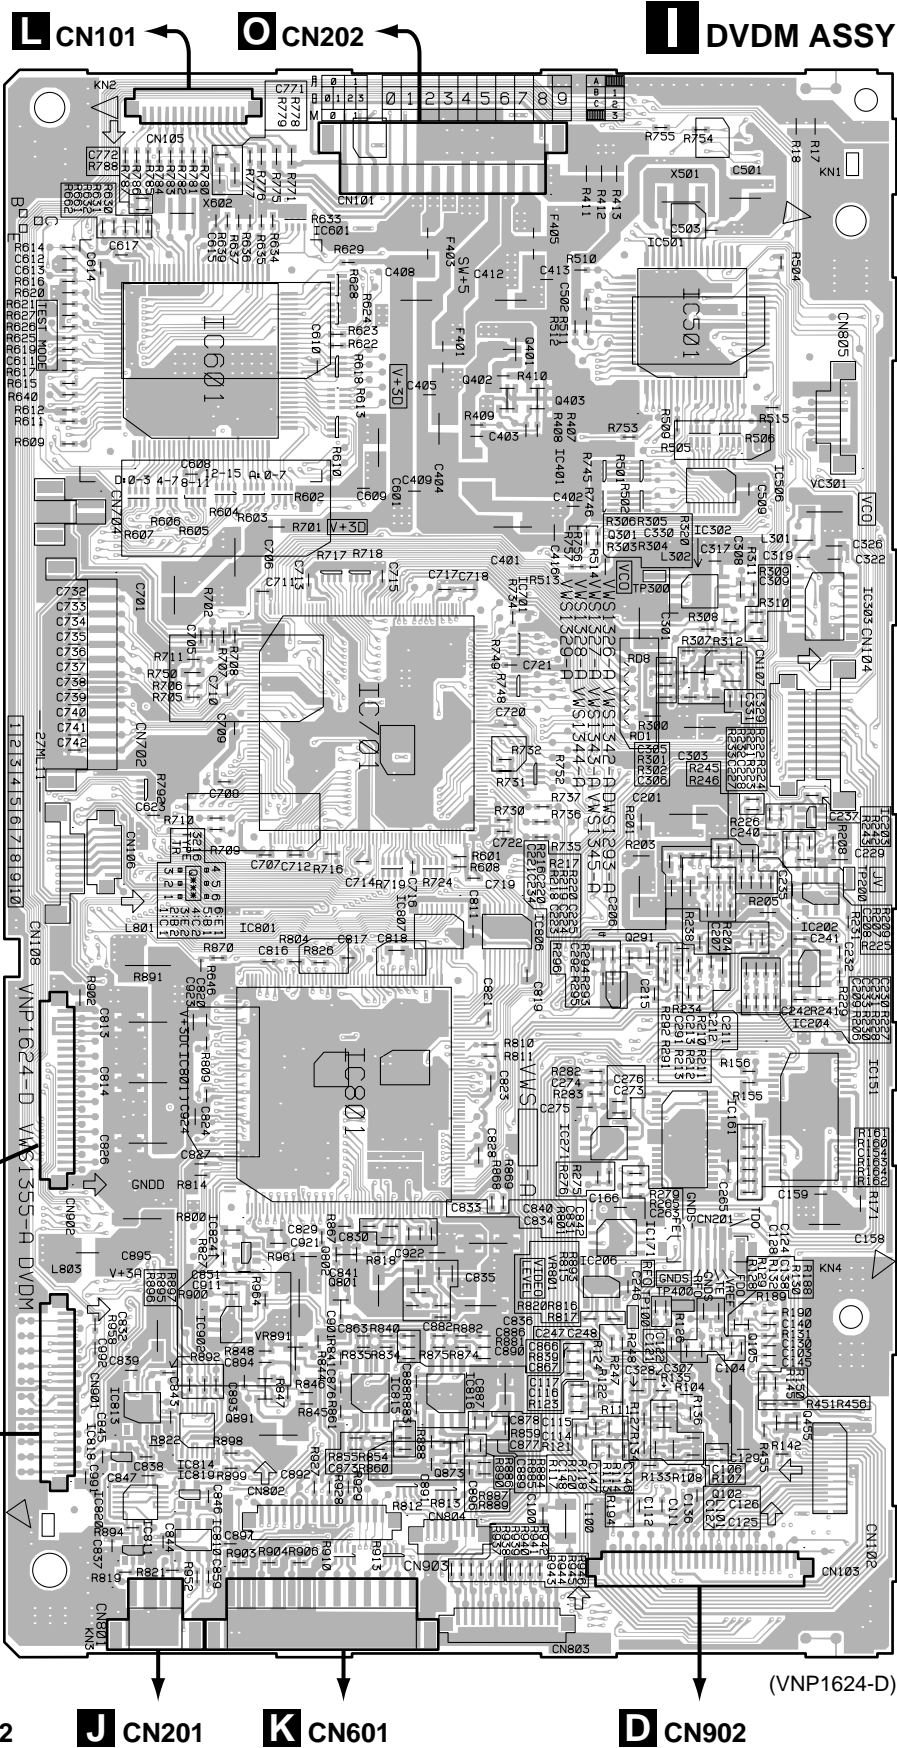

SIDE A

DVDM ASSY

J CN122

J CN201


K CN601

D CN902

(VNP1624-D)

DVDM ASSY

SIDE B

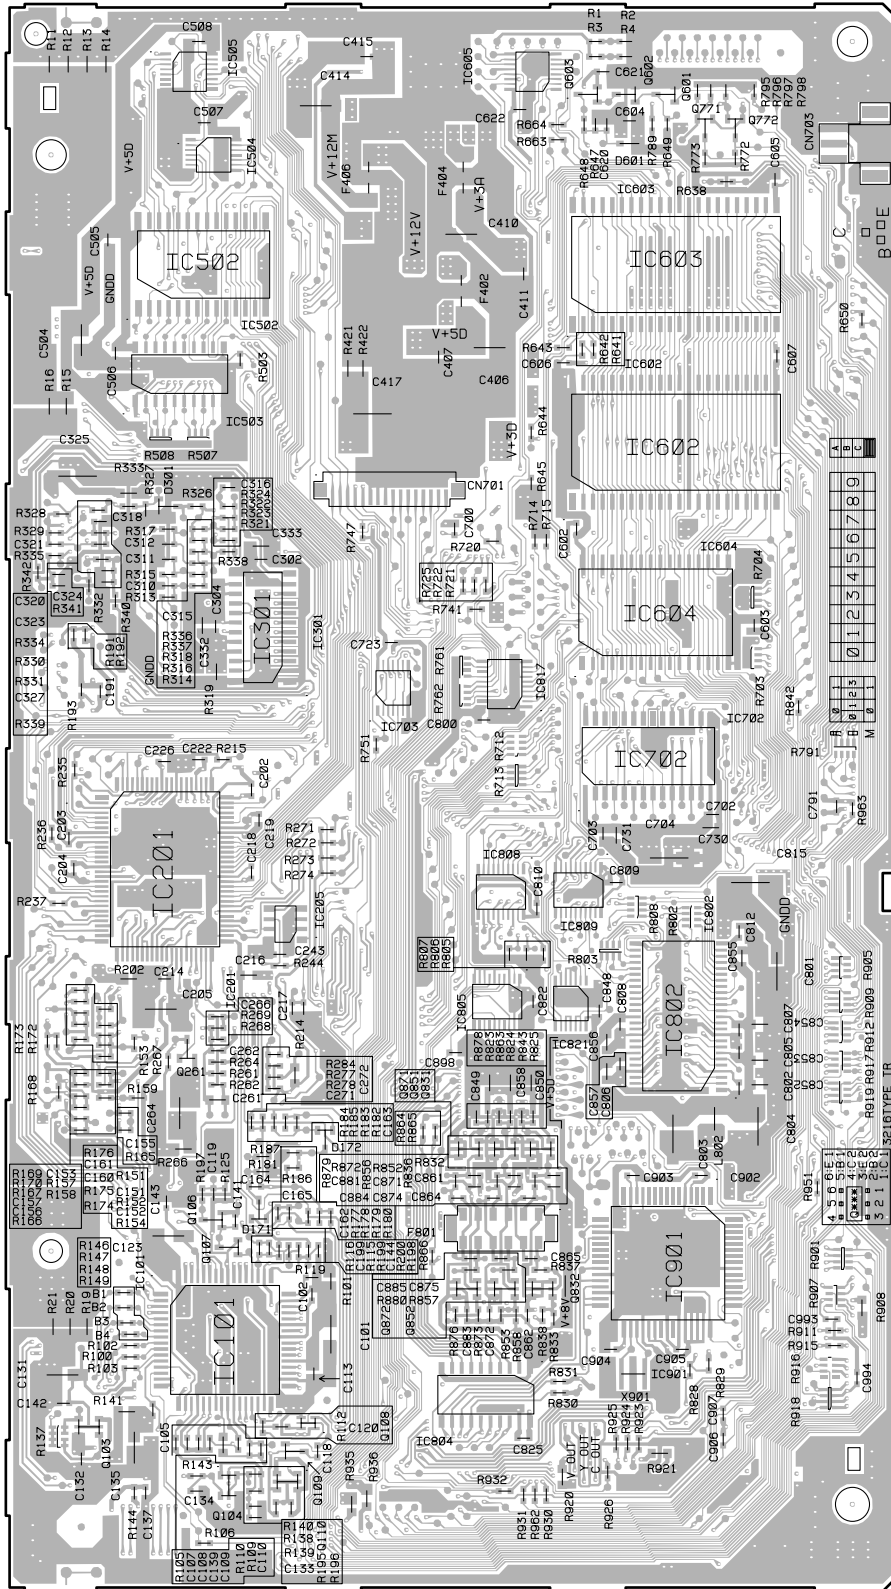

(VNP1624-D)

IC505 Q601
 IC605 Q603
 IC504 Q771
 Q772

IC502 IC603

IC503

IC602

IC301 IC604

IC703 IC817

IC702

IC201 IC808
 IC809

IC205

Q261

Q871

Q851

Q831

Q106

Q107

IC901

Q872

Q852

Q832

IC101

Q103

Q108

Q110

Q104


A
 B
 C
 D

A

B

C

D

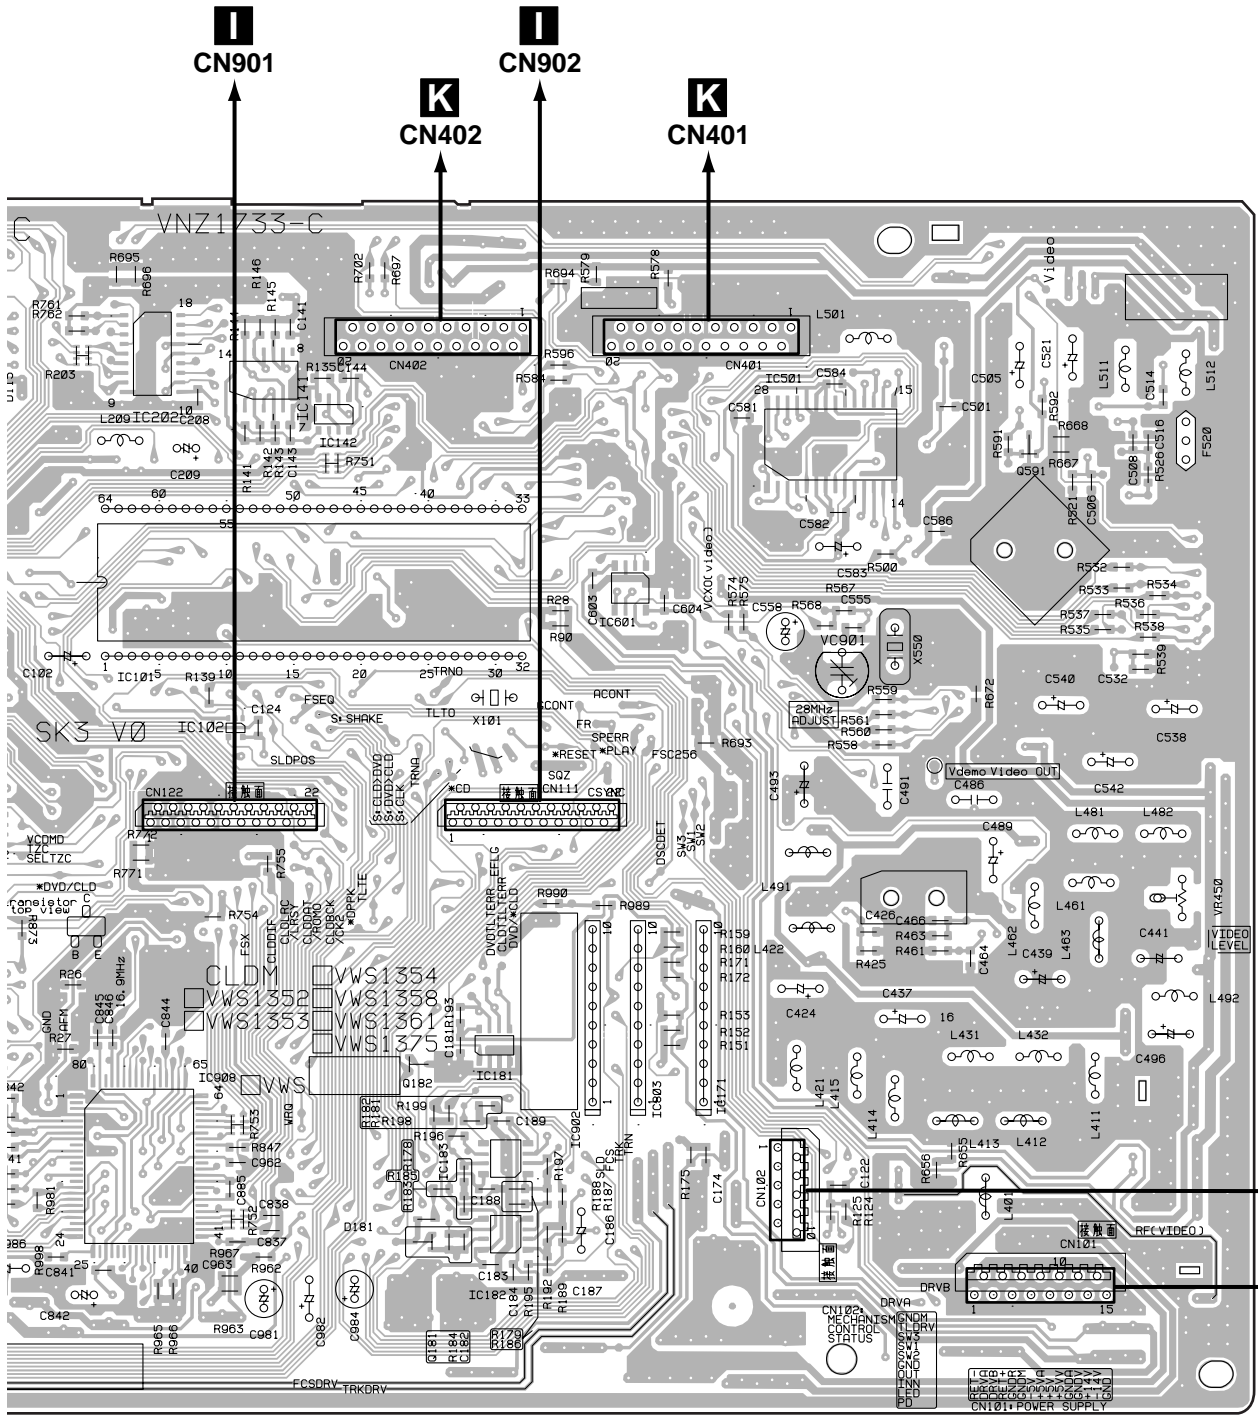


SIDE A

(VNP1662-C)

2	IC202 IC908	IC141 IC102	IC142 IC101	Q182 Q181	IC181 IC183 IC182	IC902 IC601 IC803	IC171	VC901 IC501	Q591	VR450
---	----------------	----------------	----------------	--------------	-------------------------	-------------------------	-------	----------------	------	-------

J CLDM ASSY


SIDE B

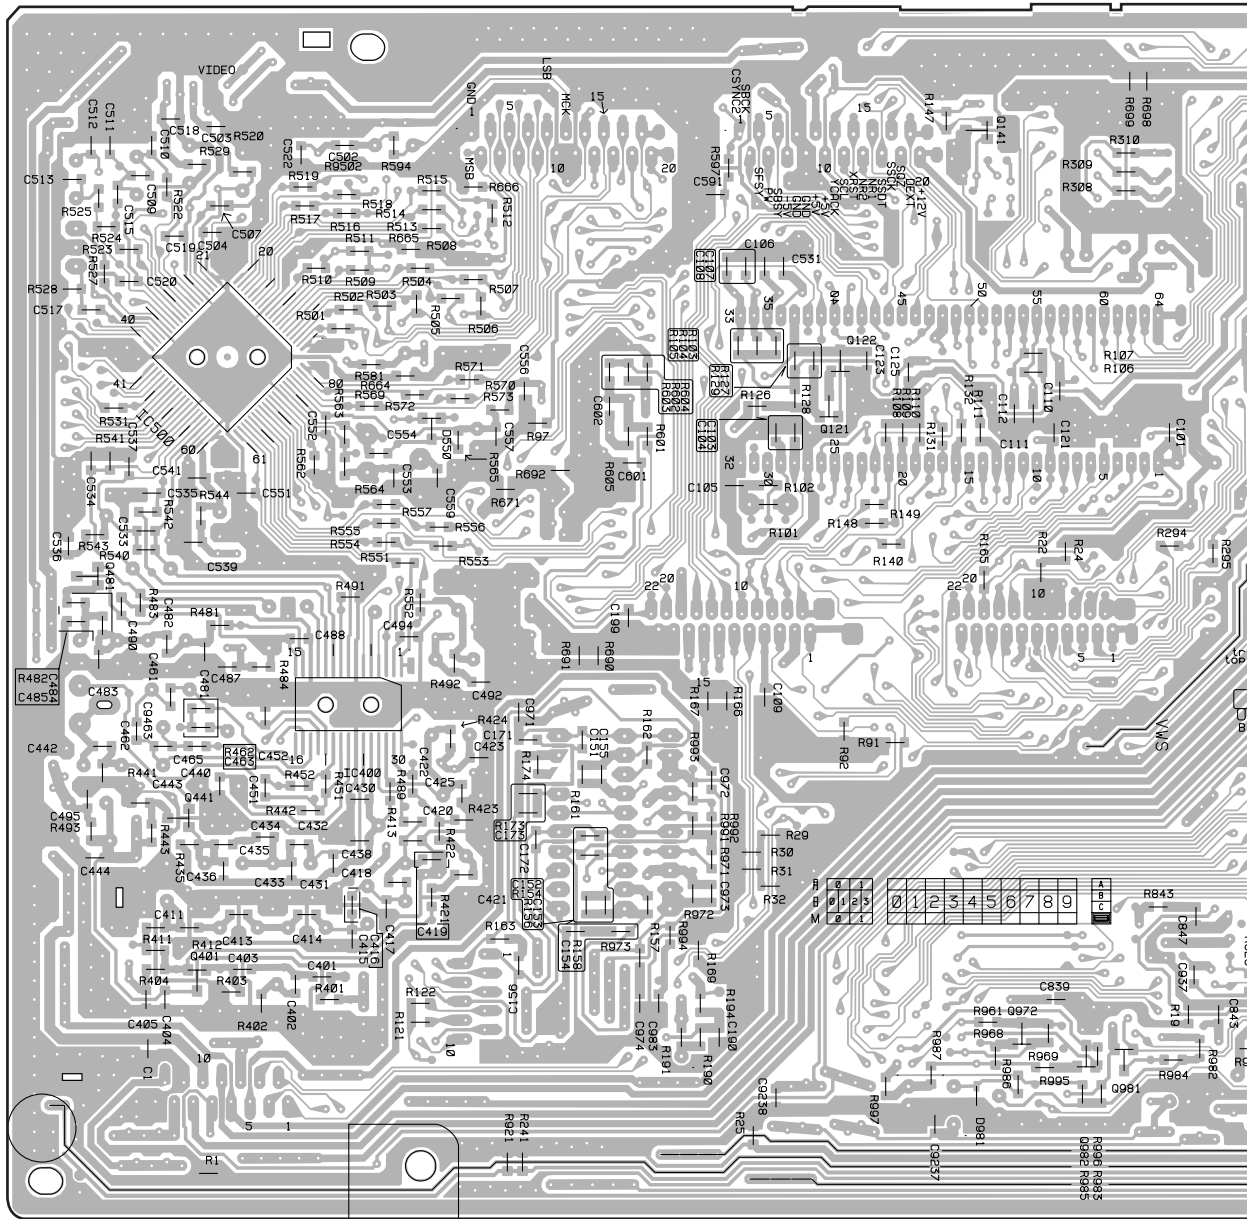

Q481 Q441 IC500 IC400 Q122 Q141 Q995 Q981
 Q401 Q972 Q966 Q969 Q968 Q991




SIDE B

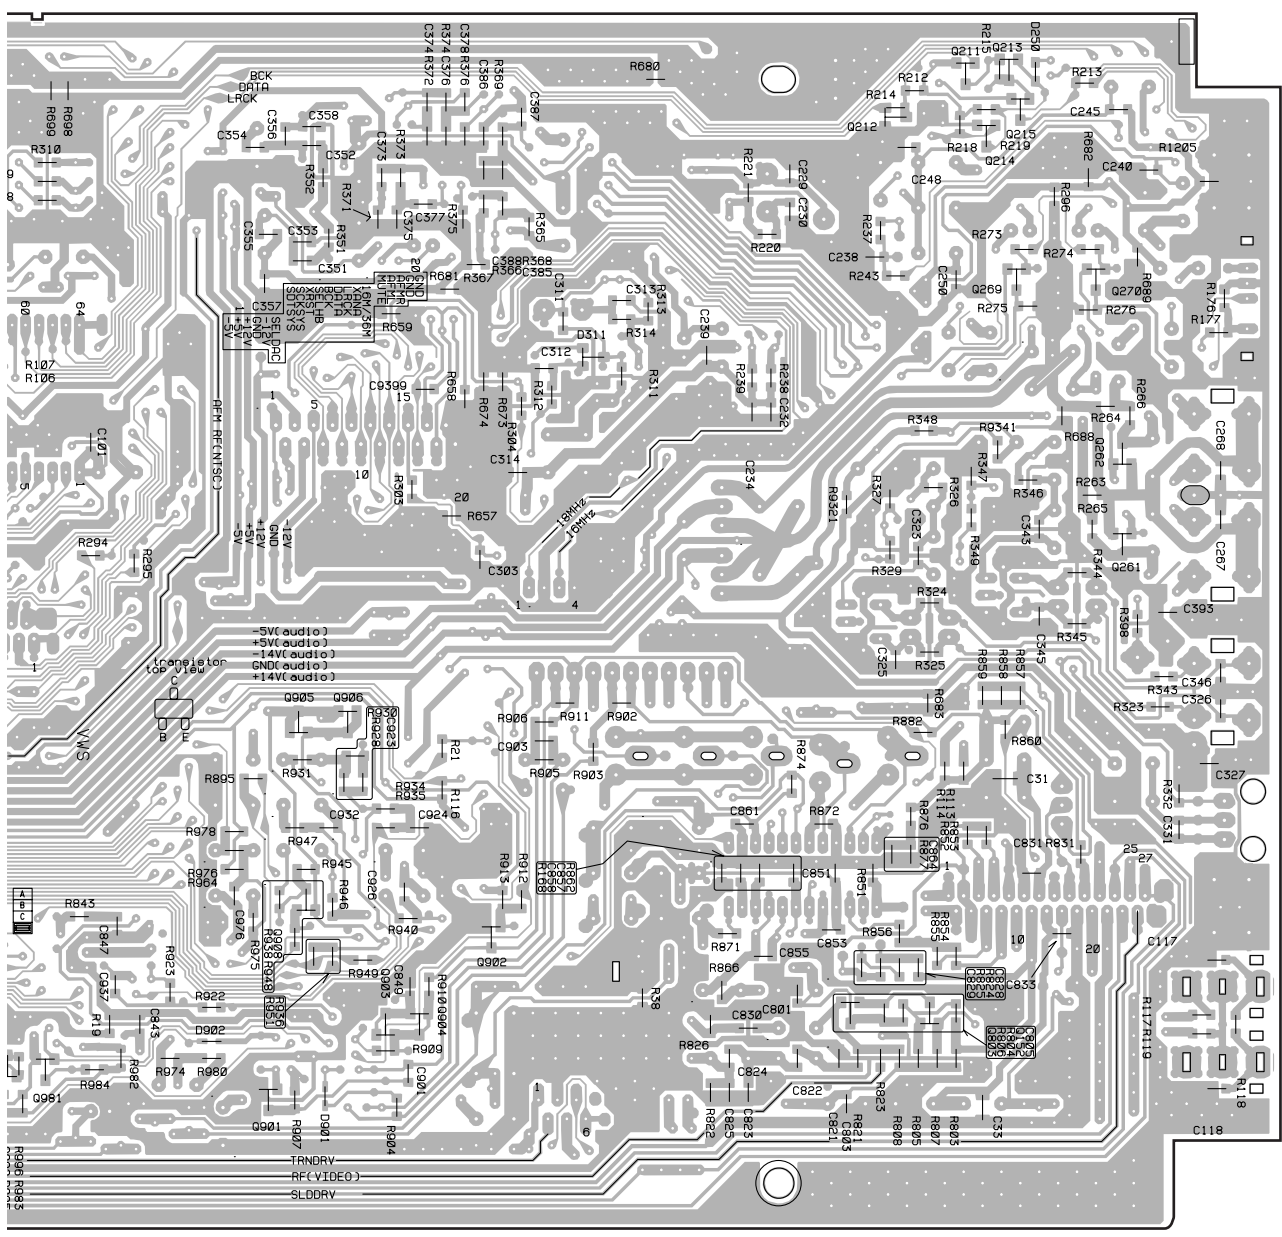

(VNP1662-C)

5 Q981	Q905 Q906 Q903 Q904 Q902	Q803 Q212 Q805	Q211 Q213 Q215 Q214 Q269	Q270 Q262 Q261
--------	--------------------------	----------------	--------------------------	----------------

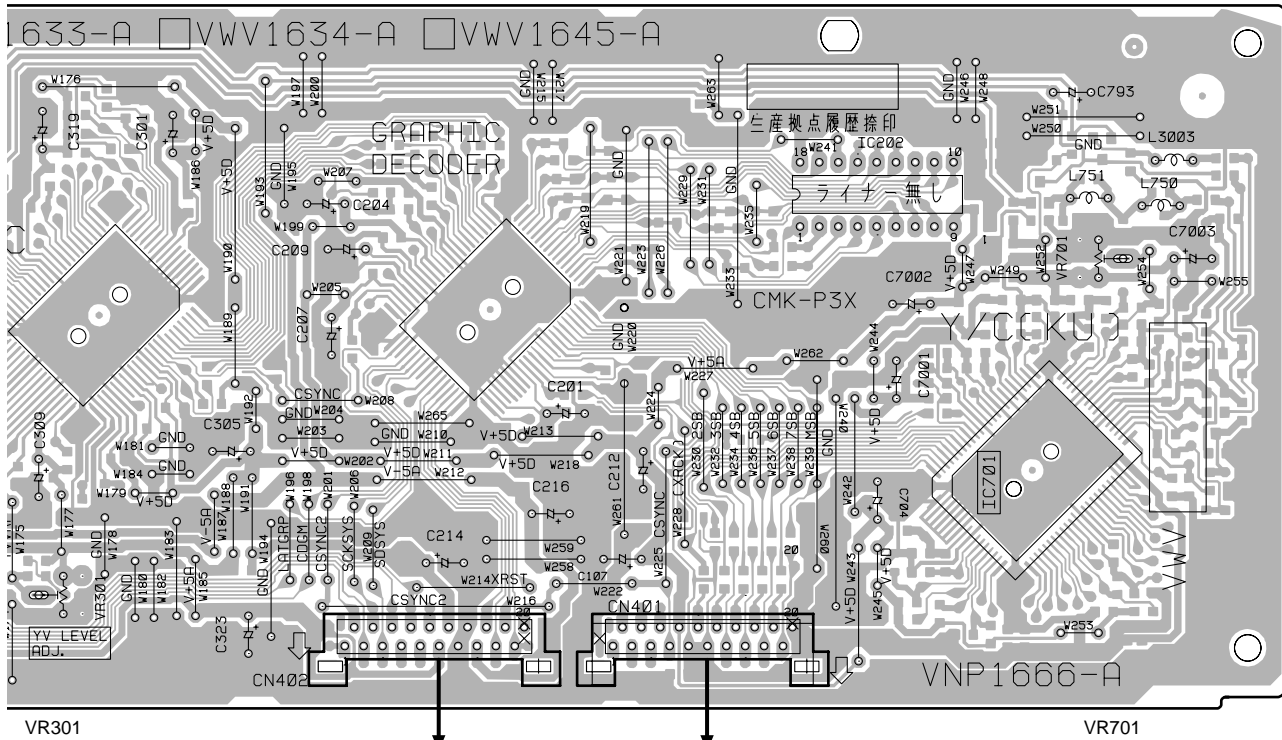


SIDE A

J
CN402

J
CN401

(VNP1666-A)

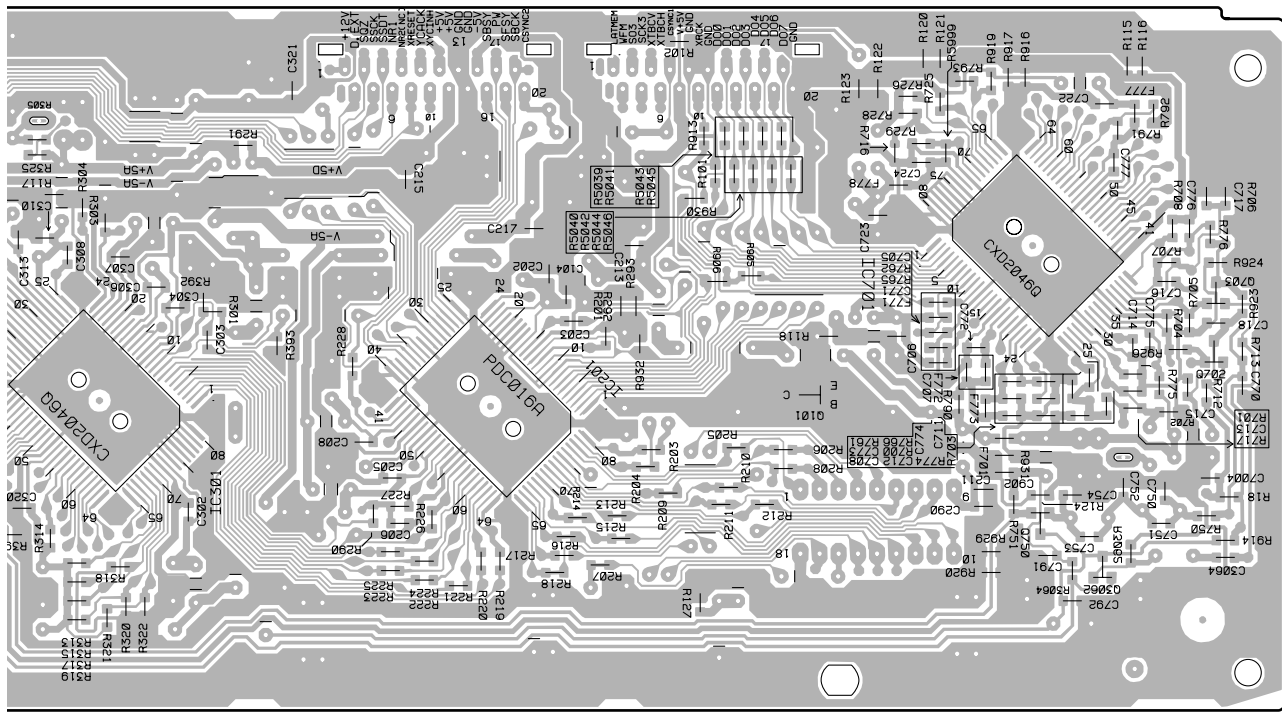


SIDE B




4.6 FLKB, PWSB and DILB ASSEMBLIES

A

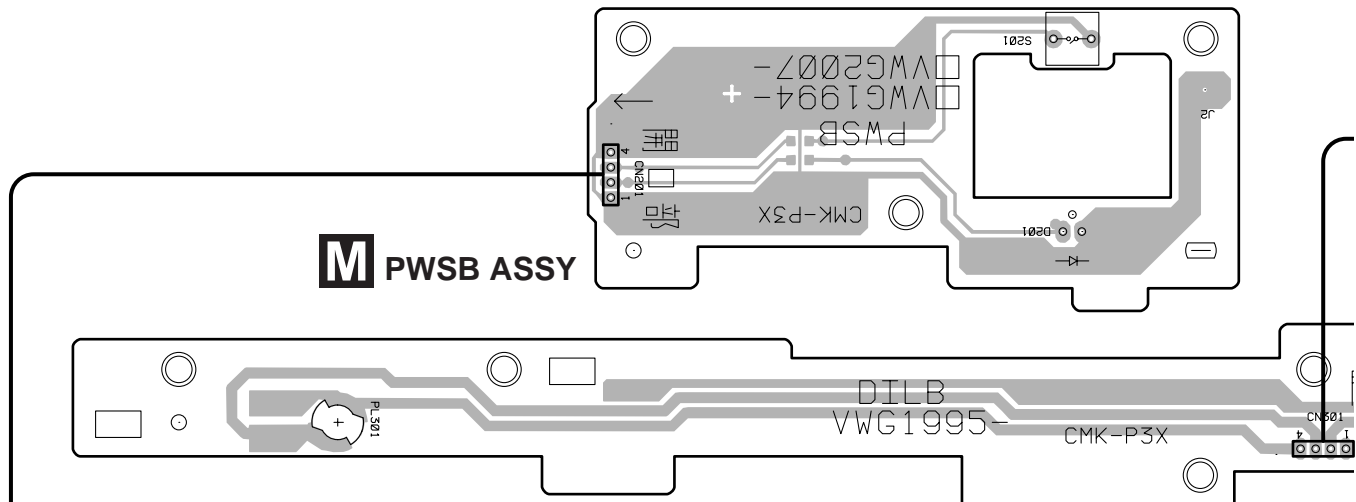


B

SIDE A

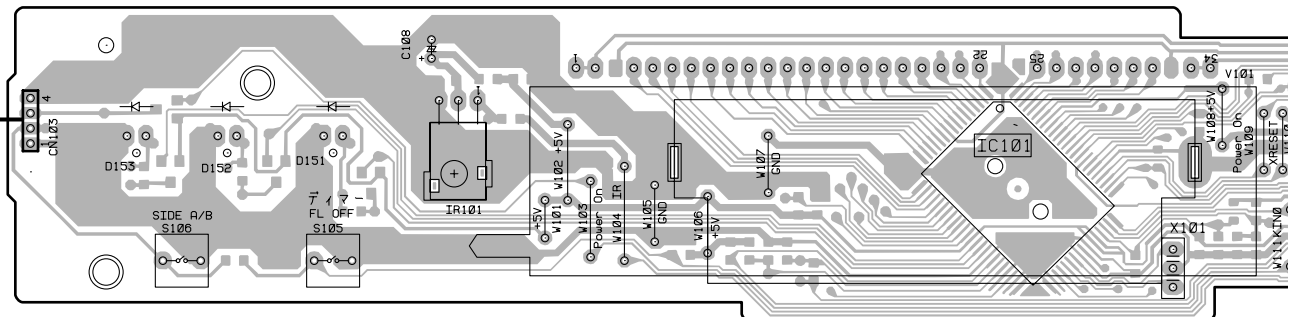


SIDE B

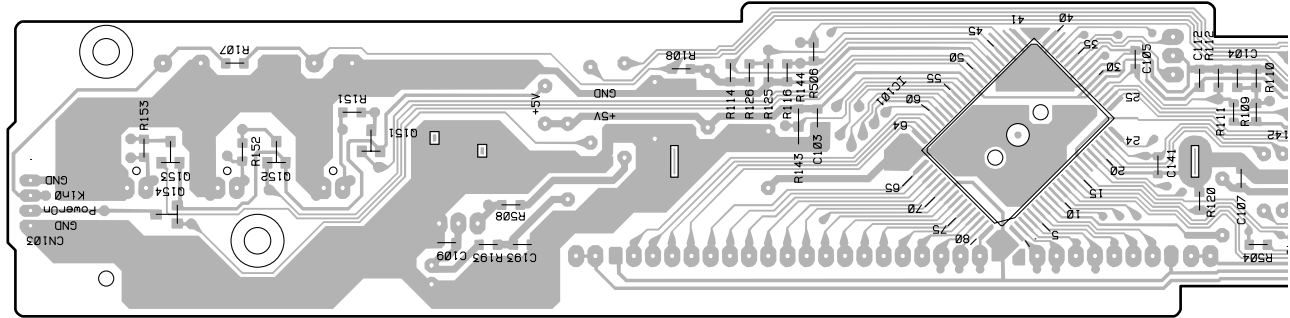

D

M PWSB ASSY

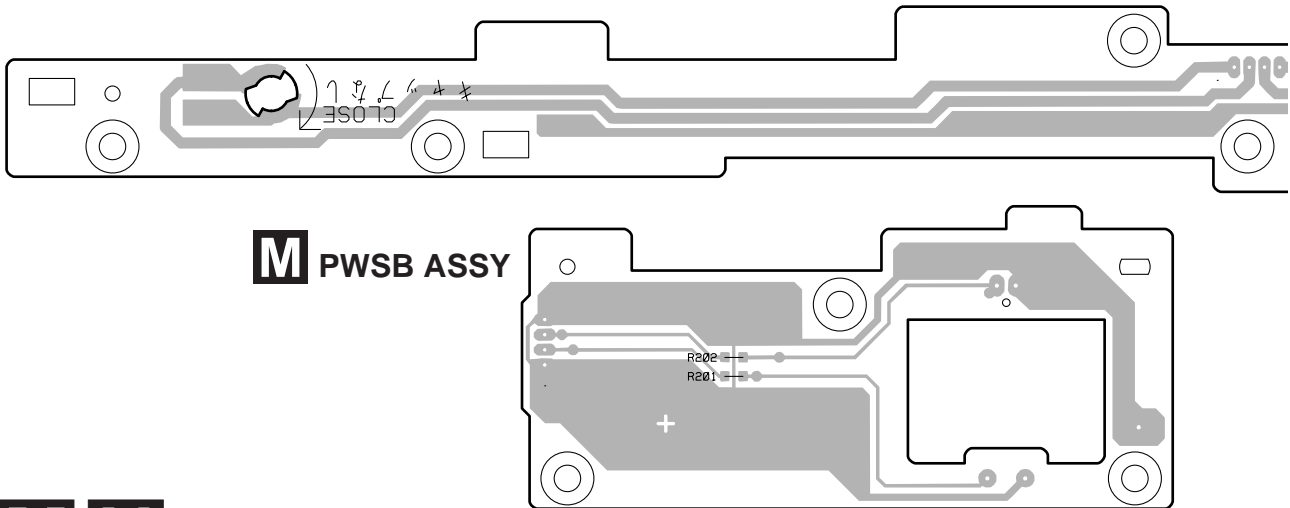


4.7 POWER SUPPLY ASSY


● FOR KU/CA TYPE

POWER SUPPLY ASSY

SIDE A

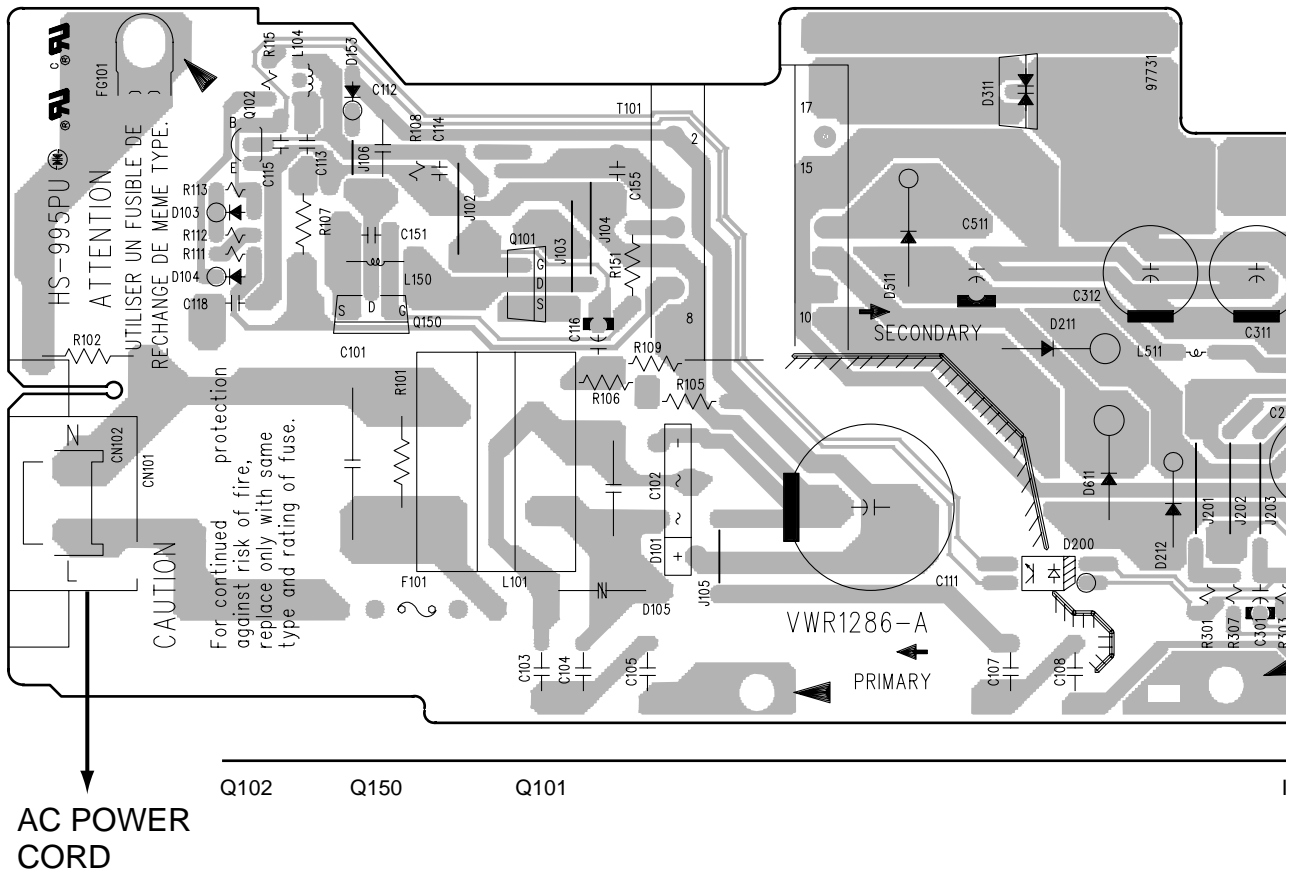

A
B
C
D

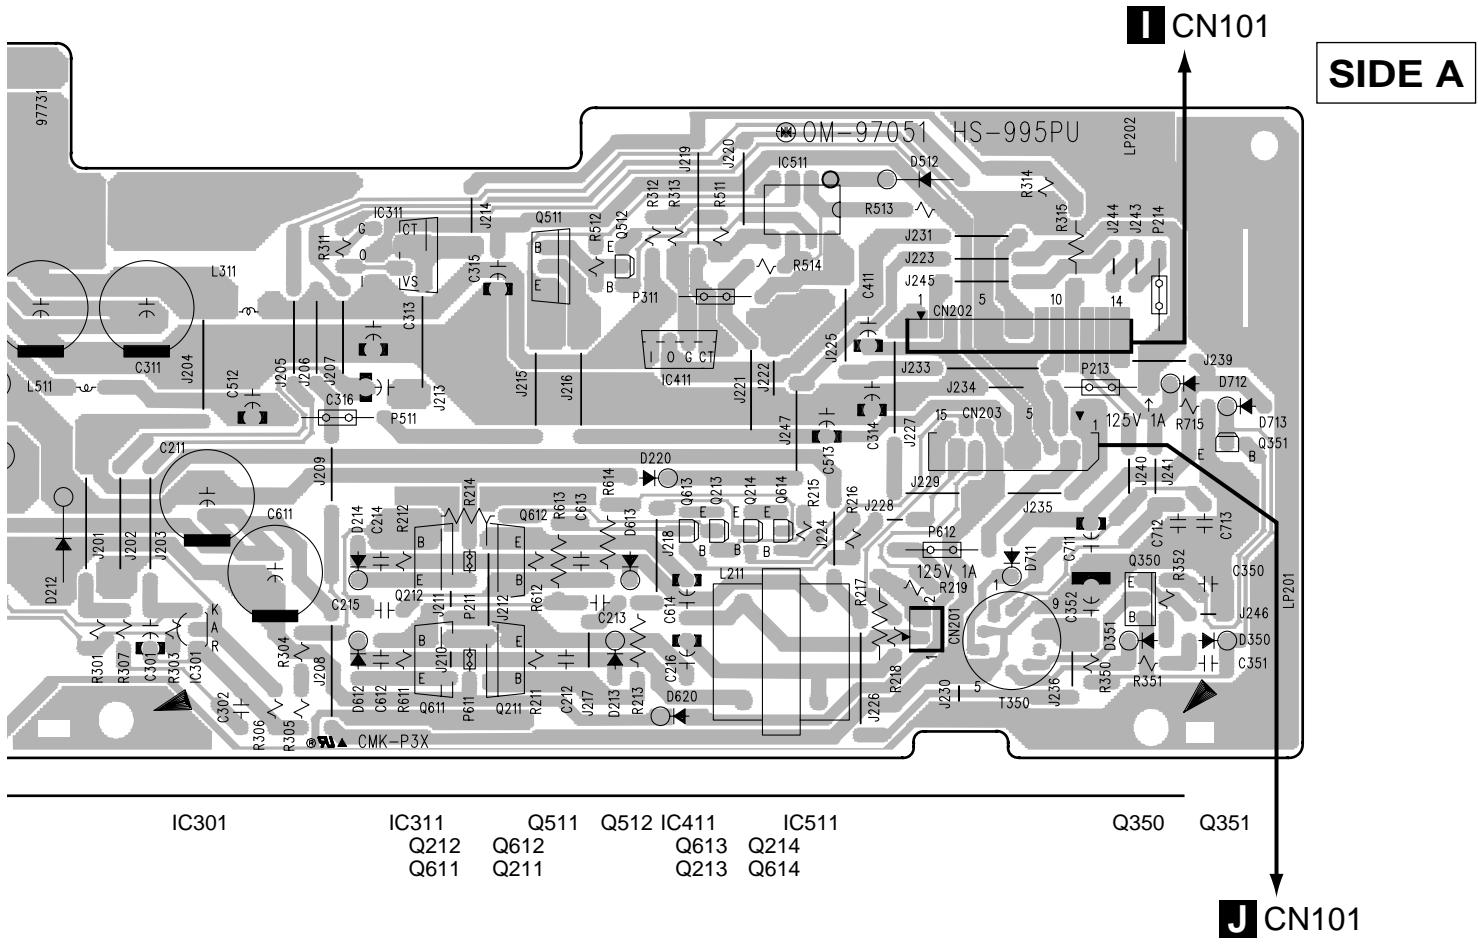

- IC301
- IC311
- Q511
- Q512
- IC411
- IC511
- Q350
- Q351
- Q212
- Q612
- Q613
- Q214
- Q611
- Q211
- Q613
- Q214
- Q614

SIDE A


J CN101



● FOR RD/RA TYPE

POWER SUPPLY ASSY

SIDE A

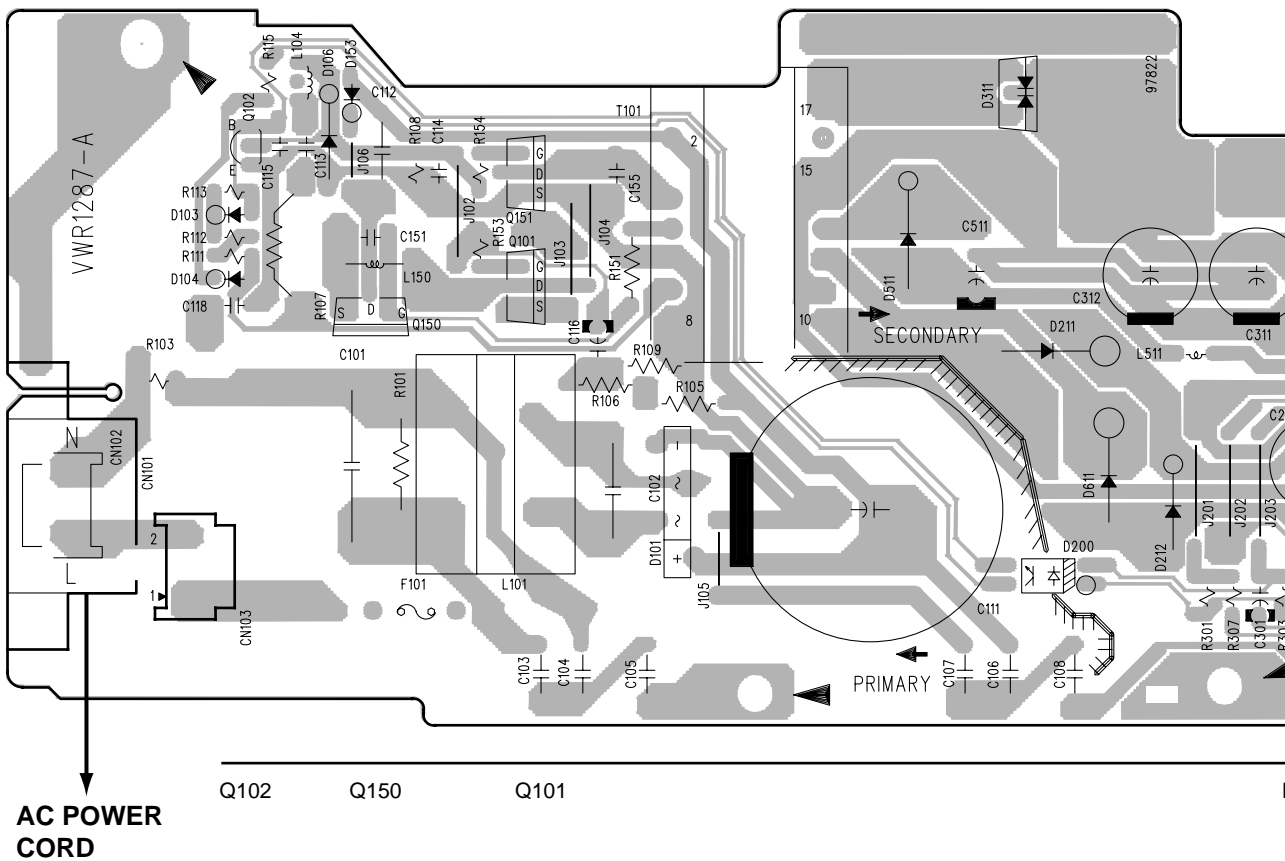


A

B

C

D

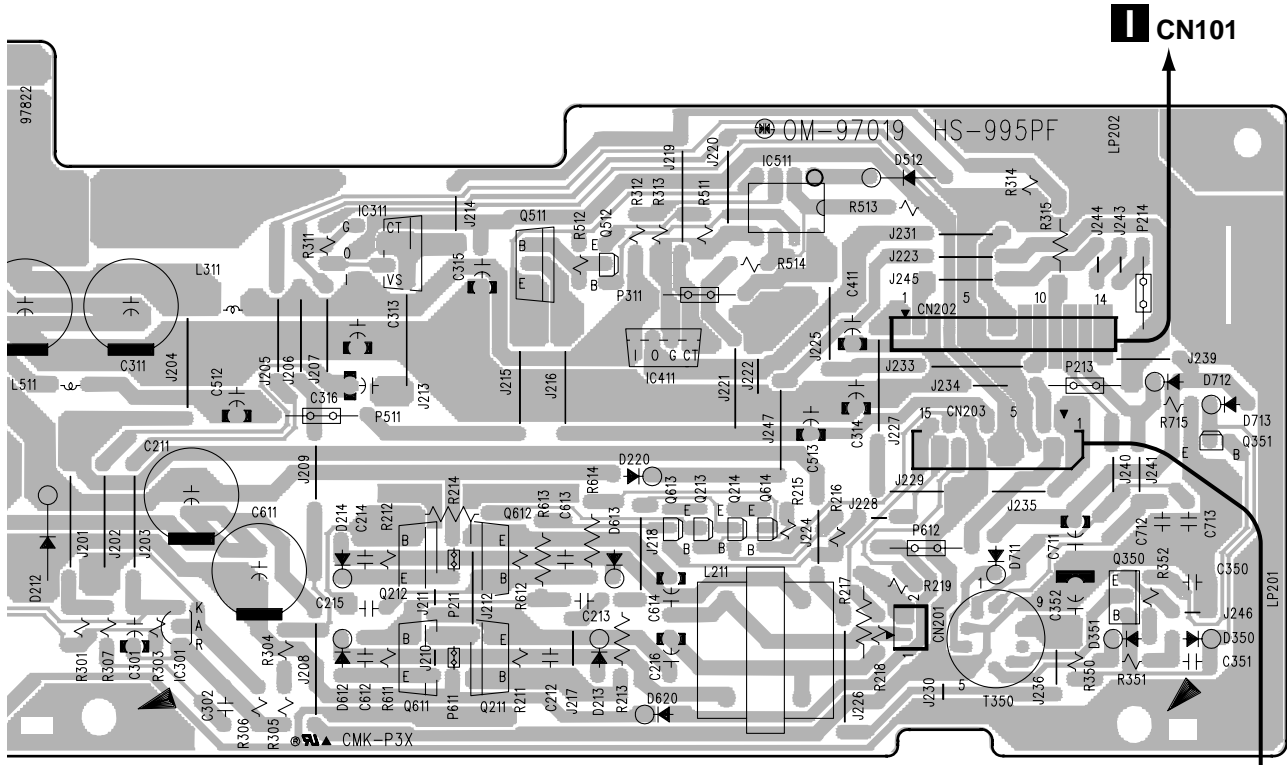

SIDE A

1 CN101

J CN101

IC301 IC311 Q511 Q512 IC411 IC511 Q350 Q351

 Q212 Q612 Q613 Q214

 Q611 Q211 Q213 Q614



5. PCB PARTS LIST

NOTES: ●Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.

●The Δ mark found on some component parts indicates the importance of the safety factor of the part.

Therefore, when replacing, be sure to use parts of identical designation.

●When ordering resistors, first convert resistance values into code form as shown in the following examples.

Ex.1 When there are 2 effective digits (any digit apart from 0), such as 560 ohm and 47k ohm (tolerance is shown by J=5%, and K=10%).

560 Ω → 56 × 10¹ → 561 RD1/4PU 5 6 1 J

47k Ω → 47 × 10³ → 473 RD1/4PU 4 7 3 J

0.5 Ω → R50 RN2H R 5 0 K

1 Ω → 1R0 RS1P 1 R 0 K

Ex.2 When there are 3 effective digits (such as in high precision metal film resistors).

5.62k Ω → 562 × 10¹ → 5621 RN1/4PC 5 6 2 1 F

■ LIST OF WHOLE PCB ASSEMBLIES

Mark	Symbol and Description	Part No.		Remarks
		KU/CA type	RD/RA type	
NSP	MACB ASSY	VWM1507	VWM1507	
NSP	└ LMSB ASSY	VWG1554	VWG1554	
NSP	└ PKSB ASSY	VWG1555	VWG1555	
NSP	└ FG ASSY	VWG1556	VWG1556	
NSP	MECHB ASSY	VWM1721	VWM1721	
NSP	└ CNNB ASSY	VWG1792	VWG1792	
NSP	└ TNMB ASSY	VWG1793	VWG1793	
NSP	└ DCSB ASSY	VWG1794	VWG1794	
NSP	└ LCSB ASSY	VWG1795	VWG1795	
NSP	└ BISB ASSY	VWG1796	VWG1796	
NSP	FLKB ASSY	VWM1879	VWM1879	
NSP	└ FLKY ASSY	VWG2005	VWG2005	
NSP	└ PWSB ASSY	VWG1994	VWG1994	
NSP	└ DILB ASSY	VWG1995	VWG1995	
	CLDM ASSY	VWS1358	VWS1358	
	DVDM ASSY	VWS1377	VWS1377	
	GYCB ASSY	VWV1633	VWV1633	
Δ	POWER SUPPLY ASSY	VWR1286	VWR1287	

■ PCB PARTS LIST

Mark	No.	Description	Part No.
A		LMSB ASSY	
		SWITCHES	
	S101-S103		VSG1006
		OTHERS	
	CN101	10P CONNECTOR	52044-1045
B		PKSB ASSY	
		SWITCHES	
	S104,S105		VSG1006
C		FG ASSY	
		SEMICONDUCTOR	
	D101		GP1S24
D		CNNB ASSY	
		OTHERS	
	CN903	23P FFC CONNECTOR	52030-2310
	CN901	26P FFC CONNECTOR	52030-2610
	CN905,CN906	KR CONNECTOR	S2B-PH-K-S
	CN902	26P FFC CONNECTOR	SLW26R-1C7
	CN904	27P FFC CONNECTOR	SLW27R-1C7
E		TNMB ASSY	
		OTHERS	
	CN911	6P FFC CONNECTOR	52044-0645
	CN912	KR CONNECTOR	B2B-PH-K-S
	CN913	KR CONNECTOR	B3B-PH-K-S
F		DCSB ASSY	
		SWITCH	
	S902		DSG1017
		OTHERS	
	CN915	KR CONNECTOR	S2B-PH-K-S
G		LCSB ASSY	
		SWITCH	
	S903		DSG1017
		OTHERS	
	CN916	KR CONNECTOR	S2B-PH-K-S
H		BISB ASSY	
		SWITCH	
	S901		DSG1017
		OTHERS	
	CN914	KR CONNECTOR	S2B-PH-K-S

Mark	No.	Description	Part No.
I		DVDM ASSY	
		SEMICONDUCTORS	
		IC301	ADC1175CIJMX
		IC171	BA10393F
	△	IC401	BA178M08FP
		IC151	BA6797FP
		IC813	CY2081SL-611
		IC702	HM514800CJ-7
		IC101	LA9700M
		IC201	LC78650NE
		IC802	MB811171622A-100FN
		IC801	MB86371C
		IC815,IC816	MC14577CF
		IC271,IC302	NJM2100M
		IC203	NJM2107F
		IC901	PD2058A
		IC601	PD3381A
		IC701	PD4833A
		IC501	PD4889A
		IC502	SRM2B256SLMX70
		IC202,IC204,IC206,IC902	TC4W53F
		IC604	TC551001BFL-85
		IC503	TC74HC573AF
		IC804	TC74HCT541AF
		IC303	TC74HCU04AF
		IC807,IC808	TC74LCX245FT
		IC821	TC74VHC00FT
		IC814,IC820	TC74VHC02FT
		IC505,IC605	TC74VHC139FT
		IC703	TC74VHC14FT
		IC504	TC74VHC20FT
		IC805,IC806,IC809	TC74VHC541FT
		IC506	TC74VHCT245AFT
		IC817	TC74VHCT541AFT
		IC811,IC818,IC819	TC7SHU04F
		IC810	TC7WU04F
		IC603	VYW1612
	△	Q401	2SB1260
		Q108	HN1K03FU
		Q455,Q831,Q832,Q851,Q852	IMT1A
		Q871,Q872	IMT1A
		Q103,Q402,Q403,Q873	IMX1
		Q102,Q104,Q291,Q301	IMZ1A
		Q106,Q603	PDTA114EK
		Q107,Q109,Q602	PDTC114EK
		Q601,Q771,Q772	PDTC114TK
		D301	KV1410
		D171,D172	MA152WK
		D601	RB501V-40
		COILS AND FILTERS	
		F771,F778,F779 CHIP BEAD	DTF1067
		F896 FERRITE CORE	VTF1077
		F952 FERRITE CORE	VTF1080
		F801 VIDEO FILTER	VTF1098
		F401-F406 CHIP EMI FILTER	VTH1037
		L301 (1.5μH)	VTL1059
		L101,L302 (10μH)	VTL1061
		L802,L803 (22μH)	VTL1067
		L335,L340,L342 CHIP BEAD	VTL1074
		L777,L780-L787,L895 CHIP BEAD	VTL1075

Mark	No.	Description	Part No.
	L897-L899	CHIP BEAD	VTL1075
	L100	CHIP BEAD	VTL1119

CAPACITORS

C623	CCSRCH100D50
C152,C208,C291,C612,C613	CCSRCH101J50
C700,C735,C737,C739	CCSRCH101J50
C897,C898,C991	CCSRCH101J50
C111,C139,C215,C231,C232	CCSRCH151J50
C248	CCSRCH151J50
C125,C148,C329	CCSRCH180J50
C112,C118	CCSRCH220J50
C121,C130,C199,C319,C324	CCSRCH330J50
C120	CCSRCH331J50
C310,C323,C327	CCSRCH470J50
C230	CCSRCH471J50
C126,C331,C838	CCSRCH560J50
C127,C330,C863,C873,C882	CCSRCH5R0C50
C160	CCSRCH680J50
C401,C417,C892	CEHV470M10
C101,C104,C201,C325,C601	CEV101M6R3
C701,C704,C706,C801	CEV101M6R3
C803,C804,C813-C815,C826	CEV101M6R3
C901	CEV101M6R3
C123,C158,C412,C414	CEV220M16
C835,C895	CEV221M4
C131,C135,C205,C206,C301	CEV470M6R3
C303,C404,C406,C408,C410	CEV470M6R3
C501,C504,C832,C836,C841	CEV470M6R3
C887	CEV470M6R3
C211	CKSQYB104K25
C100,C109,C124,C216,C220	CKSQYB105K10
C229,C234,C275,C308,C326	CKSQYB105K10
C332,C333,C730,C731	CKSQYB105K10
C416,C818,C823,C828	CKSQYF105Z16
C213,C292,C309,C321	CKSRYB102K50
C105,C106,C108,C146,C147	CKSRYB103K50
C151,C154-C157,C161,C207	CKSRYB103K50
C217,C221,C247,C276,C318	CKSRYB103K50
C320,C620,C705,C722,C772	CKSRYB103K50
C859	CKSRYB103K50
C143,C162-C165,C223,C224	CKSRYB104K16
C242,C273,C274,C311,C312	CKSRYB104K16
C315	CKSRYB104K16
C141,C271	CKSRYB222K50
C328	CKSRYB223K25
C122	CKSRYB473K16
C102,C103,C113,C129	CKSRYF104Z16
C132-C134,C136,C137,C159	CKSRYF104Z16
C166,C191,C202-C204,C209	CKSRYF104Z16
C214,C218,C219,C222	CKSRYF104Z16
C226-C228,C235,C237,C241	CKSRYF104Z16
C246,C302,C304,C305,C317	CKSRYF104Z16
C322,C402,C403,C405,C407	CKSRYF104Z16
C409,C411,C413,C415	CKSRYF104Z16
C502,C503,C505-C509	CKSRYF104Z16
C602-C611,C614,C615,C617	CKSRYF104Z16
C621,C622,C702,C703	CKSRYF104Z16
C707-C721,C723,C732-C734	CKSRYF104Z16
C736,C738,C740-C742,C771	CKSRYF104Z16
C791,C800,C802,C805-C812	CKSRYF104Z16
C816,C817,C819-C822	CKSRYF104Z16

Mark	No.	Description	Part No.
	C824,C825,C827,C829,C830		CKSRYF104Z16
	C833,C834,C837,C839,C840		CKSRYF104Z16
	C842-C848,C861,C862,C867		CKSRYF104Z16
	C871,C872,C876,C878,C881		CKSRYF104Z16
	C883,C888-C890,C902-C905		CKSRYF104Z16

C911	CKSRYF104Z16
C852,C855,C857,C858 (2.2μF)	VCG1031
C922-C924 (2.2μF)	VCG1031
VC301 (40pF)	VCM1010

RESISTORS

R602,R603,R610 (47Ω)	DCN1090
R613,R618 (47Ω)	DCN1090
R507,R508,R624,R628 (10kΩ)	DCN1094
R633,R703,R704,R717 (10kΩ)	DCN1094
R718,R745,R746,R761 (10kΩ)	DCN1094

R762,R792,R812,R813 (10kΩ)	DCN1094
R137,R501,R502 (20Ω)	DCN1104
R505,R506,R604-R607 (20Ω)	DCN1104
R712,R713,R719 (20Ω)	DCN1104
R724,R748,R749,R791 (20Ω)	DCN1104

R802,R803,R808,R901 (20Ω)	DCN1104
R905,R907,R909,R910 (20Ω)	DCN1104
R912,R913,R916-R919 (20Ω)	DCN1104
R101,R11-R14,R141	RS1/10S0R0J
R15-R17,R171,R18	RS1/10S0R0J

R201-R203,R300,R319,R333	RS1/10S0R0J
R411-R413,R701,R775,R776	RS1/10S0R0J
R891,R893,R902,R908,R961	RS1/10S0R0J
R205	RS1/10S101J
R835,R839,R855,R859,R875	RS1/16S1001F

R881	RS1/16S1001F
R834,R854,R874	RS1/16S1201F
R823-R825	RS1/16S1500F
R117,R118	RS1/16S1501F
R126	RS1/16S1502F

R241,R247	RS1/16S2202F
R110,R153,R155,R168,R169	RS1/16S2702F
R173,R174,R213,R228,R229	RS1/16S2702F
R248	RS1/16S2702F
R152,R156,R158-R164,R167	RS1/16S4702F

R170,R172,R175,R194,R227	RS1/16S4702F
R836,R856,R879	RS1/16S5600F
VR801 (1kΩ)	VCP1125
Other Resistors	RS1/16S□□□□

OTHERS

CN903	PH CONNECTOR	S13B-PH-SM3
CN101	PH CONNECTOR	S14B-PH-SM3
CN801	PH CONNECTOR	S4B-PH-SM3
	FLEXIBLE CABLE	VDA1681
TP100,TP200,TP300,TP400	CHECEK CHIP	VKF1001

CN201	CONNECTOR	VKN1324
CN106	7P CONNECTOR	VKN1411
CN105	14P CONNECTOR	VKN1418
CN901,CN902	22P CONNECTOR	VKN1426
CN103	26P CONNECTOR	VKN1430

KN1-KN3	EARTH METAL FITTING LABEL	VNF1109
		VRW1750
X602	CERAMIC RESONATOR(20MHz)	VSS1114
X501	CERAMIC RESONATOR(10MHz)	VSS1115
X901	CERAMIC RESONATOR(24MHz)	VSS1118

Mark	No.	Description	Part No.
J	CLDM ASSY		
	SEMICONDUCTORS		
	IC761		BA10393F
	IC251,IC601,IC905,IC906		BA4560F
	IC352		CA0002AM
	IC203		CY2081SL-611
	IC171,IC803		LA6510
	IC400		LA7134M
	IC801		LA9425
	IC901		LA9430M
	IC908		LC78625E
	IC182,IC183		MM6558XF
	IC501		MN4777AS
△	IC221		NJM78L08A
△	IC222		NJM79L08A
	IC500		PD0234A
	IC202		PD0236AM
	IC101		PD0266A2
	IC201		PE8001A
	IC902		TA8410AK
	IC181,IC184,IC762,IC907		TC4W53F
	IC321,IC341		TC74HCU04AF
	IC205-IC207		TC7S02F
	IC102		TC7S32F
	IC204,IC208		TC7WU04F
	Q121,Q182		2PB709A
	Q269,Q270,Q391-Q393,Q401		2PD601A
	Q441,Q481,Q803,Q811		2PD601A
	Q903-Q906		2PD601A
	Q834		2SA854S
	Q152		2SC3082K
	Q261,Q262		2SD2114K
	Q211,Q213,Q217,Q394,Q981		PDTA124EK
	Q122,Q181,Q214,Q215,Q233		PDTC124EK
	Q901,Q908		PDTC124EK
	D101,D181,D250,D902,D981		1SS355
	D221		EP10QY03
	D311,D550		KV1851
	D115		UDZS5.1B
	COILS AND FILTERS		
	F501-F508	CHIP BEAD	DTF1069
	L9294,L9295	CHIP INPEDER	DTL1028
	L414		LAU100J
	L401		LAU101J
	L352,L821-L823		LAU181J
	L209,L241,L311,L312,L331		LAU220J
	L351,L413,L422,L461,L491		LAU220J
	L831		LAU220J
	L412,L482,L511		LAU270J
	L242,L244		LAU2R2J
	L431,L432,L512		LAU430J
	L243		LAU470J
	L462		LAU560J
	L415,L501		LAU8R2J
	L832		LFA220J
	L463		LFA561J
	L323,L343	COIL	PTL1003
	L322,L342	COIL	RTF1167
	F238-F240,F581,F664,F665		VTF1096
		CHIP SOLID INDUCTOR	

Mark	No.	Description	Part No.
	F9321,F9341		VTF1096
		CHIP SOLID INDUCTOR	
	F520	14.3MHz FILTER	VTF1099
	L205,L224	CHIP BEAD	VTL1098
	L9242	CHIP BEAD	VTL1101
	CAPACITORS		
	C229,C418,C419,C421,C434		CCSQCH100D50
	C513,C535		CCSQCH100D50
	C353,C821,C837-C839,C843		CCSQCH101J50
	C864,C865		CCSQCH101J50
	C921,C943		CCSQCH102J50
	C432,C436,C483,C516,C553		CCSQCH120J50
	C413		CCSQCH121J50
	C403,C415,C484,C502		CCSQCH150J50
	C355,C823,C901		CCSQCH151J50
	C313,C352		CCSQCH180J50
	C205,C824,C973		CCSQCH220J50
	C255,C256,C414,C506		CCSQCH221J50
	C230,C354,C411,C417,C431		CCSQCH270J50
	C830		CCSQCH270J50
	C104,C105,C257,C258,C356		CCSQCH330J50
	C433,C451,C510,C512		CCSQCH330J50
	C351,C402,C485		CCSQCH390J50
	C217,C222,C401,C462		CCSQCH470J50
	C925		CCSQCH471J50
	C941		CCSQCH561J50
	C509		CCSQCH5R0C50
	C358,C511,C806		CCSQCH680J50
	C920		CCSQCH681J50
	C435,C559,C822,C829		CCSQCH7R0D50
	C357,C825		CCSQCH820J50
	C461,C465		CCSQCH910J50
	C123		CCSQSL102J50
	C439		CEAL100M6R3
	C489		CEAL101M6R3
	C251		CEAL470M6R3
	C383		CEALR47M50
	C986		CEANP3R3M50
	C187,C441,C856		CEANP470M6R3
	C221,C394,C975		CEAT100M50
	C332,C391,C424,C437,C493		CEAT101M10
	C505,C538,C540,C542,C558		CEAT101M10
	C583,C832,C834,C884		CEAT101M10
	C246		CEAT102M6R3
	C269,C270,C867,C929		CEAT1R0M50
	C981,C982		CEAT220M25
	C927,C928,C931		CEAT220M50
	C521		CEAT221M6R3
	C102,C209,C223,C224		CEAT470M10
	C253,C254,C261-C264,C316		CEAT470M10
	C318,C322,C324,C342,C344		CEAT470M10
	C382,C390,C802,C804,C842		CEAT470M10
	C852,C854,C859,C860		CEAT470M10
	C984		CEAT4R7M50
	C922		CEATR47M50
	C936,C940		CEJA101M6R3
	C902		CEJA220M50
	C863,C934		CEJA2R2M50
	C242,C244		CEJA470M6R3
	C862		CEJA4R7M50
	C486		CFTLA154J50

Mark	No.	Description	Part No.
	C491		CFTLA683J50
	C426,C910		CKSQYB102K50
	C845,C881,C917,C942		CKSQYB104K25
	C555,C933		CKSQYB105K10
	C923		CKSQYB153K25
	C911		CKSQYB154K16
	C903		CKSQYB222K50
	C379,C380		CKSQYB392K50
	C373-C376,C388,C912,C932		CKSQYB472K50
	C963		CKSQYB473K25
	C763		CKSQYB682K50
	C106-C112,C117,C118,C121		CKSQYF103Z50
	C124,C153,C155,C173,C181		CKSQYF103Z50
	C183,C184,C188,C189		CKSQYF103Z50
	C191,C192,C208,C210		CKSQYF103Z50
	C231-C237,C239-C241,C243		CKSQYF103Z50
	C245,C247-C250,C252		CKSQYF103Z50
	C281,C282,C311,C314,C315		CKSQYF103Z50
	C317,C321,C323,C325,C331		CKSQYF103Z50
	C341,C343,C345,C381,C386		CKSQYF103Z50
	C389,C422,C442,C508		CKSQYF103Z50
	C514,C515,C517,C533,C534		CKSQYF103Z50
	C536,C552,C554,C761,C762		CKSQYF103Z50
	C801,C803,C811,C831,C833		CKSQYF103Z50
	C836,C841,C846,C851,C853		CKSQYF103Z50
	C861,C882,C883,C885,C924		CKSQYF103Z50
	C935,C937,C939,C945-C947		CKSQYF103Z50
	C962,C974,C983		CKSQYF103Z50
	C101,C103,C122,C151,C152		CKSQYF104Z25
	C171,C172,C182,C199,C218		CKSQYF104Z25
	C267,C268,C326,C346,C385		CKSQYF104Z25
	C387,C392,C404,C405,C420		CKSQYF104Z25
	C423,C425,C430,C438,C440		CKSQYF104Z25
	C443,C452,C488,C492,C494		CKSQYF104Z25
	C504,C507,C519,C520,C531		CKSQYF104Z25
	C537,C541,C557,C601		CKSQYF104Z25
	C603,C604,C764,C805,C847		CKSQYF104Z25
	C857,C858,C866,C913,C914		CKSQYF104Z25
	C919,C971,C972,C976		CKSQYF104Z25
	C582,C584,C586		CKSQYF105Z16
	C186,C602,C855,C926,C930		CKSQYF223Z50
	C938		CKSQYF223Z50
	C377,C378,C393,C908,C909		CKSQYF224Z25
	C154,C156,C174,C312,C463		CKSQYF473Z50
	C826,C828		CKSQYF473Z50
	C265,C266		CQMBA332J50
	VC301 (20pF)		VCM-008

RESISTORS

R751	RA4C0R0J
R753	RA4C221J
R203,R752	RA4C471J
R425,R833,R834,R837,R839	RN1/10SE1002D
R891,R892	RN1/10SE1002D
R152,R156	RN1/10SE1003D
R251,R252	RN1/10SE1602D
R541	RN1/10SE1800D
R540	RN1/10SE3300D
R151,R259,R260,R277,R278	RN1/10SE3302D
R893,R894	RN1/10SE3302D
R153,R154	RN1/10SE4702D
VR450 (2.2kΩ)	PCP1025

Mark	No.	Description	Part No.
	VR603 (4.7kΩ)		PCP1028
	VR604,VR607-VR609 (47kΩ)		PCP1031
	Other Resistors		RS1/10S□□□J

OTHERS

CN103	CONNECTOR 6P	52045-0645
CN102	CONNECTOR	52045-1045
CN101	CONNECTOR	52045-1545
CN802	CONNECTOR	B11P-SHF-1AA
CN201	CONNECTOR	B4B-PH-K-S
	SCREW	BBZ30P060FFCC
JA101,JA102	JACK	RKN1004
JA331	OPTICAL OUTPUT JACK	TOTX178
	PCB BINDER	VEF1040
JA251	JACK	VKB1070
JA341	JACK	VKB1111
CN111,CN122	22P FFC CONNECTOR	VKN1253
CN801	27P FFC CONNECTOR	VKN1258
CN401,CN402	B TO B CONNECTOR 20P	VKN1403
	SCREW PLATE	VNE1948
X101	CERAMIC RESONATOR(9MHz)	VSS1040
X311	CRYSTAL RESONATOR (16MHz)	VSS1081
X312	CRYSTAL RESONATOR (18.432MHz)	VSS1116
X550	CRYSTAL RESONATOR (28MHz)	VSS1131

K GYCB ASSY SEMICONDUCTORS

IC701	CXD2046Q
IC801	TA7302P
IC620	TC74HC4053AF
IC650	TC7W00F
Q1414,Q3062,Q407,Q411,Q414	2PB709A
Q645,Q647,Q672,Q750	2PB709A
Q1411,Q1412,Q1421,Q1422	2PD601A
Q1431,Q1432,Q412,Q413	2PD601A
Q415,Q416,Q626,Q636,Q646	2PD601A
Q655-Q658,Q661,Q662,Q671	2PD601A
Q702,Q703,Q805,Q806	2PD601A
Q408-Q410	2SC1740S
Q1423,Q1433,Q417,Q420,Q651	PDTA124EK
Q803	PDTA124EK
Q1401,Q418,Q419,Q652,Q681	PDTC124EK
Q801	PDTC124EK
D650,D655,D699	MA111

COILS AND FILTERS

F701,F771-F773	CHIP BEAD	DTF1069
F777,F778	CHIP BEAD	DTF1069
L3003,L750,L751		LAU220J
L671		LAU4R7J
L801		LCTA470J2520

CAPACITORS

C433	CCSQCH100D50
C655,C771,C772,C777	CCSQCH101J50
C750,C753	CCSQCH220J50
C672,C805	CCSQCH390J50
C671	CCSQCH391J50
C754	CCSQCH470J50

Mark	No.	Description	Part No.
	C752		CCSQCH560J50
	C751		CCSQCH6R0D50
	C3064		CCSQCH910J50
	C424		CEAL101M6R3
	C1421,C1431		CEAL4R7M16
	C656		CEANP100M16
	C629		CEANP220M10
	C1401,C1402,C210,C216,C422		CEAT101M10
	C601,C7001-C7003,C704		CEAT101M10
	C431,C434		CEAT221M6R3
	C1426,C1436		CEAT471M6R3
	C426,C429,C436,C462,C603		CEJA101M6R3
	C635,C793		CEJA101M6R3
	C639		CEJANP220M10
	C705		CKSQYB102K50
	C1413,C620,C628,C632,C638		CKSQYB104K25
	C706,C707,C722,C723,C804		CKSQYB104K25
	C810,C850		CKSQYB104K25
	C806,C807,C811		CKSQYF103Z50
	C1414-C1416,C1423-C1425		CKSQYF104Z25
	C1427,C1428,C1433-C1435		CKSQYF104Z25
	C1437,C1438,C213,C215,C217		CKSQYF104Z25
	C423,C425,C427,C428,C430		CKSQYF104Z25
	C432,C435,C437,C439,C460		CKSQYF104Z25
	C463,C602,C604,C622		CKSQYF104Z25
	C626,C627,C630,C631		CKSQYF104Z25
	C633,C634,C636,C660,C692		CKSQYF104Z25
	C7004,C711,C713,C714		CKSQYF104Z25
	C716,C717,C724,C770		CKSQYF104Z25
	C773-C776,C791,C792,C802		CKSQYF104Z25
	C808,C809,C812,C902		CKSQYF104Z25

RESISTORS

R424	RN1/10SE1801D
R422	RN1/10SE2201D
R700,R704,R705	RN1/10SE2700D
R425	RN1/10SE2702D
R420,R421,R707	RN1/10SE3301D
R426,R701,R708	RN1/10SE4701D
R653,R702,R706	RN1/10SE5601D
R1422,R1432	RS1/10S2001F
R717	RS1/10S3001F
R1423,R1433	RS1/10S3301F
R650	RS1/10S6800F
R814	RS1/10S68R0F
R1415,R1425,R1435,R436-R441	RS1/10S75R0F
R627	RS1/10S75R0F
Other Resistors	RS1/10S□□□J

OTHERS

JA102	SOCKET	AKP7012
CN601	CONNECTOR	B13B-PH-K-S
	PCB BINDER	VEF1040
JA103	JACK	VKB1100
JA104	JACK	VKB1101
CN401,CN402		VKN1390
	B TO B CONNECTOR 20P	
	SCREW PLATE	VNE1948

Mark	No.	Description	Part No.
		FLKY ASSY	
		SEMICONDUCTORS	
	IC101		PE5018B
	IC102		S-806D
	Q102		DTD113ES
	Q151-Q154		PDTA124EK
	D102		1SS355
	D106		EP05Q04
	D101		RB411D
	D152,D153		SLP3118C51H
	D151		SLP4118C51H
		SWITCHES	
	S101-S106		RSG1030
		CAPACITORS	
	C106,C108,C110		CEAT470M10
	C101,C102,C104,C105,C111		CKSQYB102K50
	C141		CKSQYB102K50
	C103,C107,C109,C112,C192		CKSQYF104Z25
	C195		CKSQYF104Z25
		RESISTORS	
	Other Resistors		RS1/10S□□□J
		OTHERS	
	CN102,CN103	CONNECTOR 4P	04P-FJ
	IR101	REMOTE RECEIVER UNIT	GP1U28X
	V101	FL TUBE	VAW1046
		SPACER	VEC1599
	CN101	14P CONNECTOR	VKN1274
		HOLDER	VNF1087
	X101	CERAMIC RESONATOR(5MHZ)	VSS1104
		M PWSB ASSY	
		SEMICONDUCTOR	
	D201		SLP9118C51H
		SWITCH	
	S201		RSG1030
		RESISTORS	
	Other Resistors		RS1/10S□□□J
		OTHERS	
	CN201	CONNECTOR 4P	04R-FJ
		N DILB ASSY	
		SWITCHES	
	S301,S302		RSG1030
		RESISTORS	
	Other Resistors		RS1/10S□□□J
		OTHERS	
	CN301	CONNECTOR 4P	04R-FJ
	PL301	LAMP	VEL1022

DVL-919

Mark No. Description Part No.

POWER SUPPLY ASSY (VWR1286)

SEMICONDUCTORS

△	IC301	AN1431T
	IC311	VZF1047
	IC411	VZF1048
	IC511	UPC358C
	IC200	PC817
△	Q101	VZF1050
△	Q150	VZF1049
△	Q102	2SC3377
△	Q211, Q212	T7F4T
	Q213, Q214, Q351	2SC1740S
	Q350	2SD2007
△	Q511	2SD2395
	Q512, Q613, Q614	2SA933S
△	Q611, Q612	T7F4S
△	D101	D2SB60F4004
△	D103	MTZJ2.7B
△	D104	1SS270A
△	D153, D220, D620	VZF1045
△	D211, D611	31DF2
△	D212	RD33FB2
△	D213, D214, D612, D613	10ELS2
△	D311	VZF1052
	D350, D512	1SS270A
	D351	MTZJ2.7B
△	D511	S2LA20
	D711	10ELS2
	D713	MTZJ30A
	D712	MTZJ8.2B
	D105	UK1V26

RESISTORS

△	R151 FUSIBLE R(RF25S8.2J)	VZC1058
---	---------------------------	---------

OTHERS

△	FU101	FUSE(3.15A/125V)	VEK1044
△	FU211, FU611	FUSE(136°C)	VEK1033
△	FU213, FU612	FUSE(1A/125V)	VEK1036
△	P214, P511	FUSE(1.25A/60V)	VEK1045
△	P311	FUSE(1A/60V)	VEK1041

Mark No. Description Part No.

POWER SUPPLY ASSY (VWR1287)

SEMICONDUCTORS

△	IC301	AN1431T
	IC511	UPC358C
△	IC311	VZF1047
△	IC411	VZF1048
△	Q101, Q150, Q151	VZF1056
	Q512, Q613, Q614	2SA933S
	Q213, Q214, Q351	2SC1740S
△	Q102	2SC3377
	Q350	2SD2007
△	Q511	2SD2395
△	Q611, Q612	T7F4S
△	Q211, Q212	T7F4T
△	D213, D214, D612, D613	10ELS2
	D711	10ELS2
△	D104	1SS270A
	D350, D512	1SS270A
△	D211, D611	31DF2
△	D101	D2SB60F4004
△	D103	MTZJ2.7B
	D351	MTZJ2.7B
	D713	MTZJ30A
	D712	MTZJ8.2B
△	D200	PS2561L1-1VM
△	D106	RD18FB2
△	D212	RD33FB2
△	D511	S2LA20
△	D153, D220, D620	VZF1045
△	D311	VZF1052

RESISTORS

△	R151	VZC1058
---	------	---------

OTHERS

△	FU211, FU611	FUSE(136°C)	VEK1033
△	FU213, FU612	FUSE(1A/125V)	VEK1036
△	P311	FUSE(1A/60V)	VEK1041
△	P214, P511	FUSE(1.25A/60V)	VEK1045
△	F101	FUSE(3.15A/250V)	VEK1050

6. ADJUSTMENT

6.1 ADJUSTMENT ITEMS AND LOCATION

■ Adjustment Items

[Mechanical Part]

CLD

- ① Tilt Offset Adjustment
- ② Tangential Direction Angle Adjustment for Side A
- ③ Spindle Motor Centering Adjustment for Side A
- ④ Crosstalk Check and Fine Tilt Offset Adjustment for Side A
- ⑤ Focus Servo Loop Gain Adjustment
- ⑥ Tracking Servo Loop Gain Adjustment
- ⑦ Tangential Direction Angle Adjustment for Side B
- ⑧ Spindle Motor Centering Adjustment for Side B
- ⑨ Crosstalk Check and Fine Tilt Offset Adjustment for Side B

DVD

- ⑩ RF MAX Adjustment
- ⑪ DVD Jitter Adjustment

[Electrical Part]



CLDM ASSY

- ① Video Level Adjustment
- ② 18MHz Master Clock Adjustment

DVDM ASSY

- ① VCO Offset Adjustment
- ② Video Output Level Adjustment

■ Adjustment Points (PCB Part)

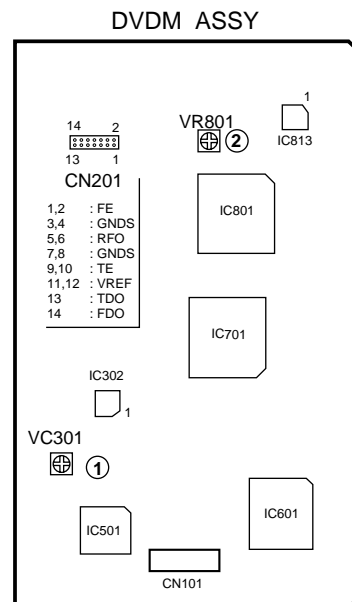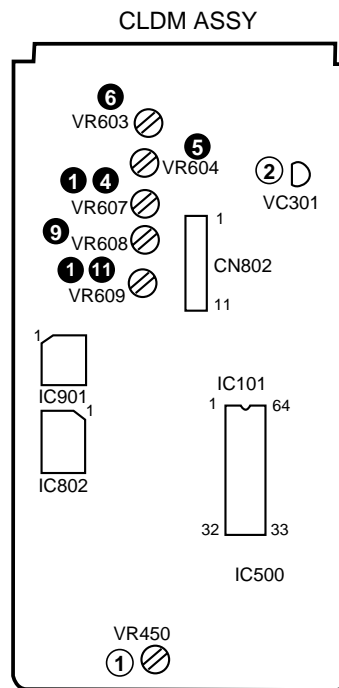


SIDE A


■ Adjustment Points (Mechanism Part)

CLD


[Side A]

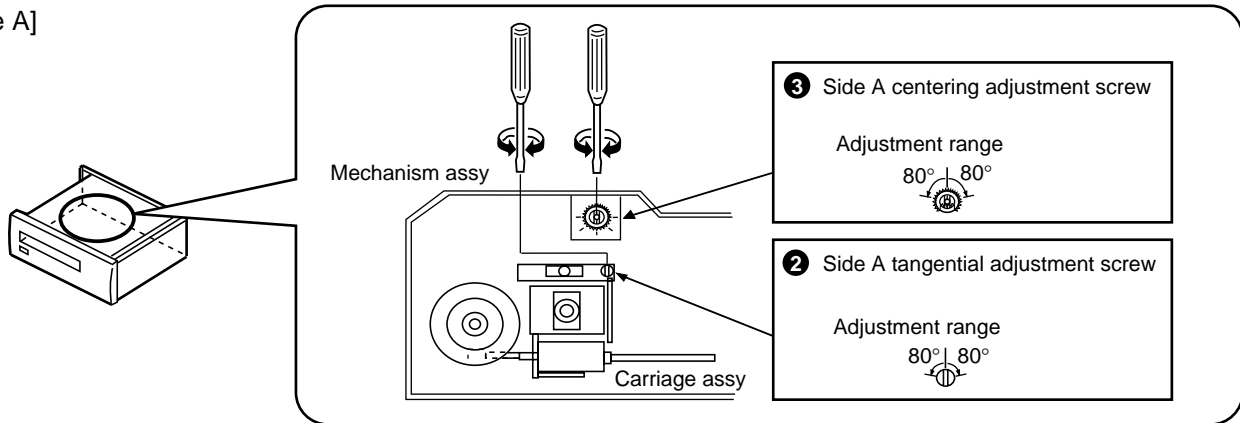

[Side B]

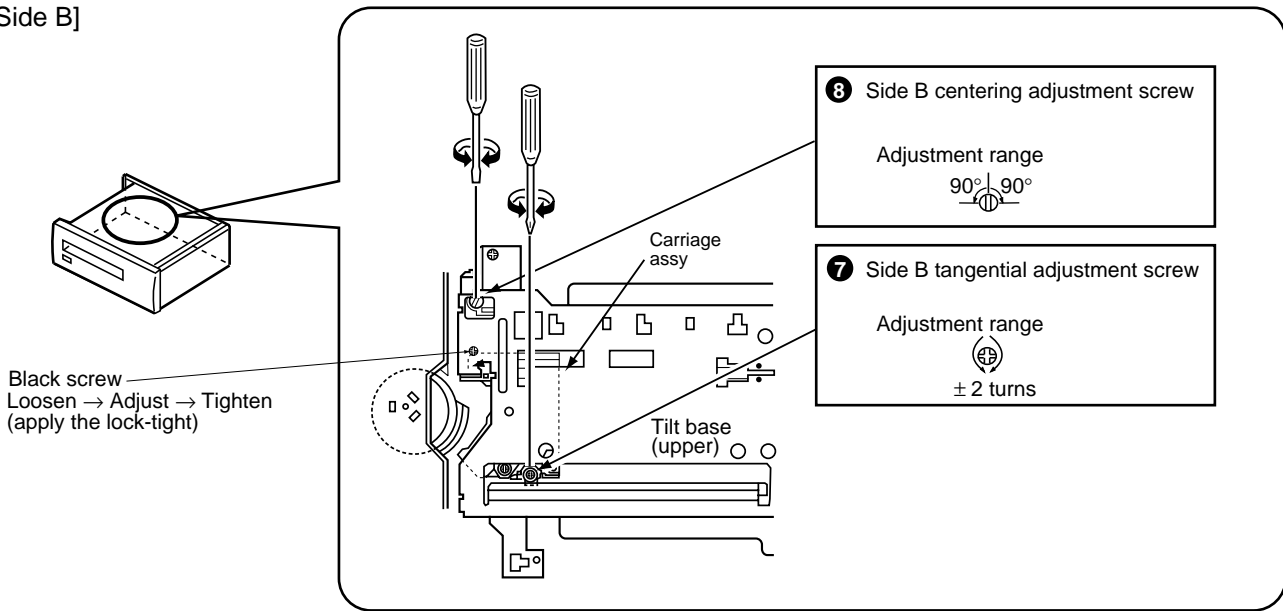









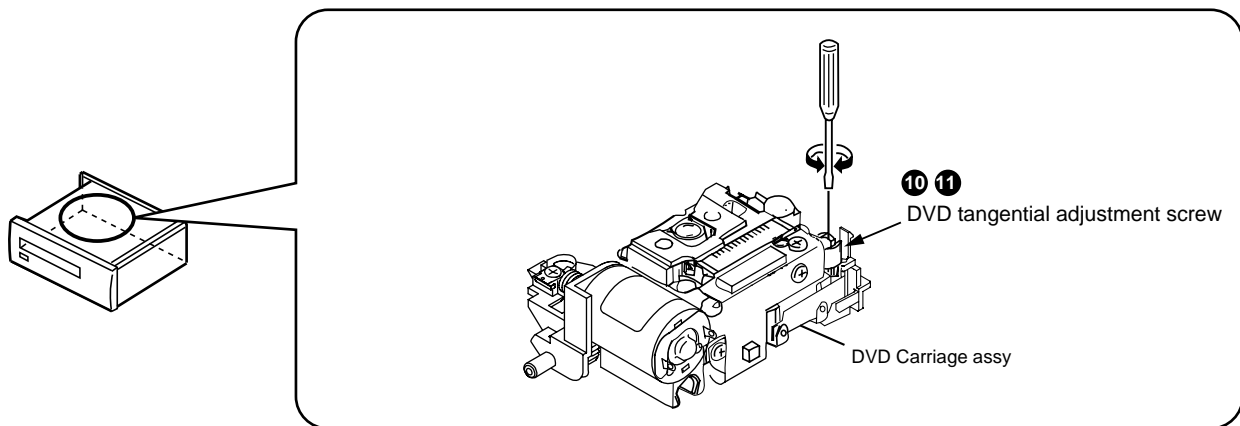








DVD




Note : Apply the lock-tight.

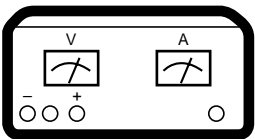6.2 JIGS AND MEASURING INSTRUMENTS

 <p>CD test disc (YEDS-7)</p>	 <p>LD test disc (NTSC :GGV1012) (PAL :GGV1007)</p>	 <p>DVD test disc (DVD-MJK1)</p>	 <p>⊖ Screwdriver (medium)</p>
 <p>⊖ Screwdriver (small)</p>	 <p>⊕ Precise screwdriver</p>	 <p>⊖ Precise screwdriver</p>	 <p>⊕ Screwdriver (large)</p>
 <p>⊕ Screwdriver (medium)</p>	 <p>DC power supply</p>	 <p>Dual-trace oscilloscope (with delay) Frequency band \geq 40MHz</p>	 <p>Frequency counter Display digit \geq 8-digit</p>
 <p>TV monitor</p>	 <p>Test mode remote control unit (GGF1067)</p>	 <p>Jitter meter</p>	 <p>Equalizer unit</p>
 <p>Plastic or Ceramic ⊖ Screwdriver (small)</p>			


6.3 TEST MODE

TEST MODE: ON

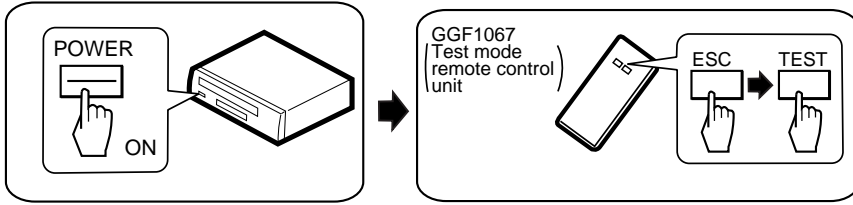


TEST MODE: DISC SET


• With TRAY

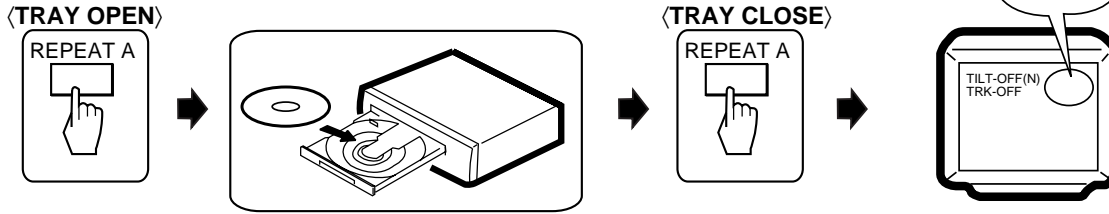


• No TRAY

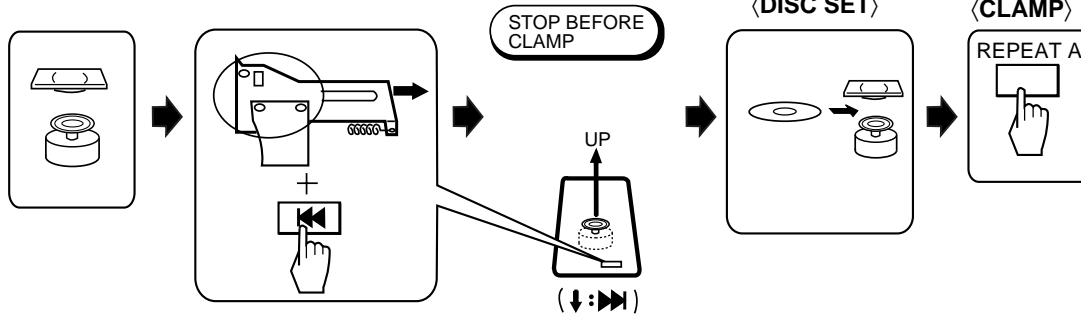


TEST MODE: PLAY

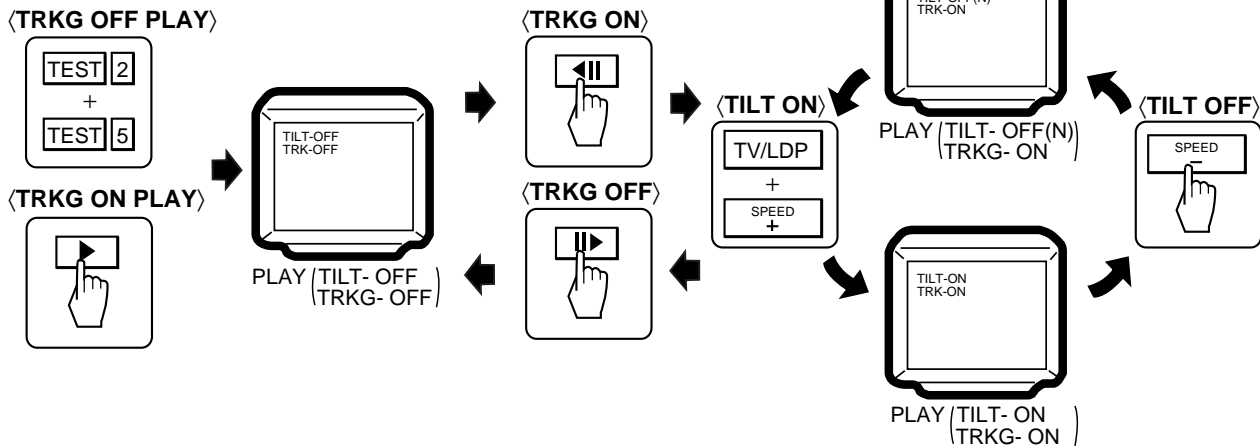

TEST MODE: OFF

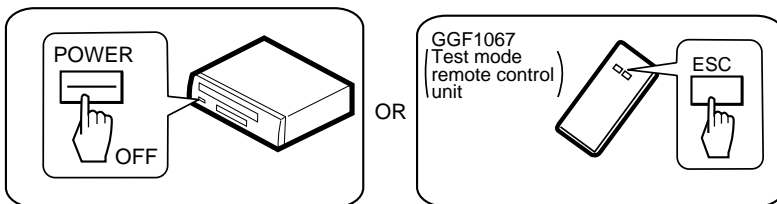


6.4 NECESSARY ADJUSTMENT POINTS

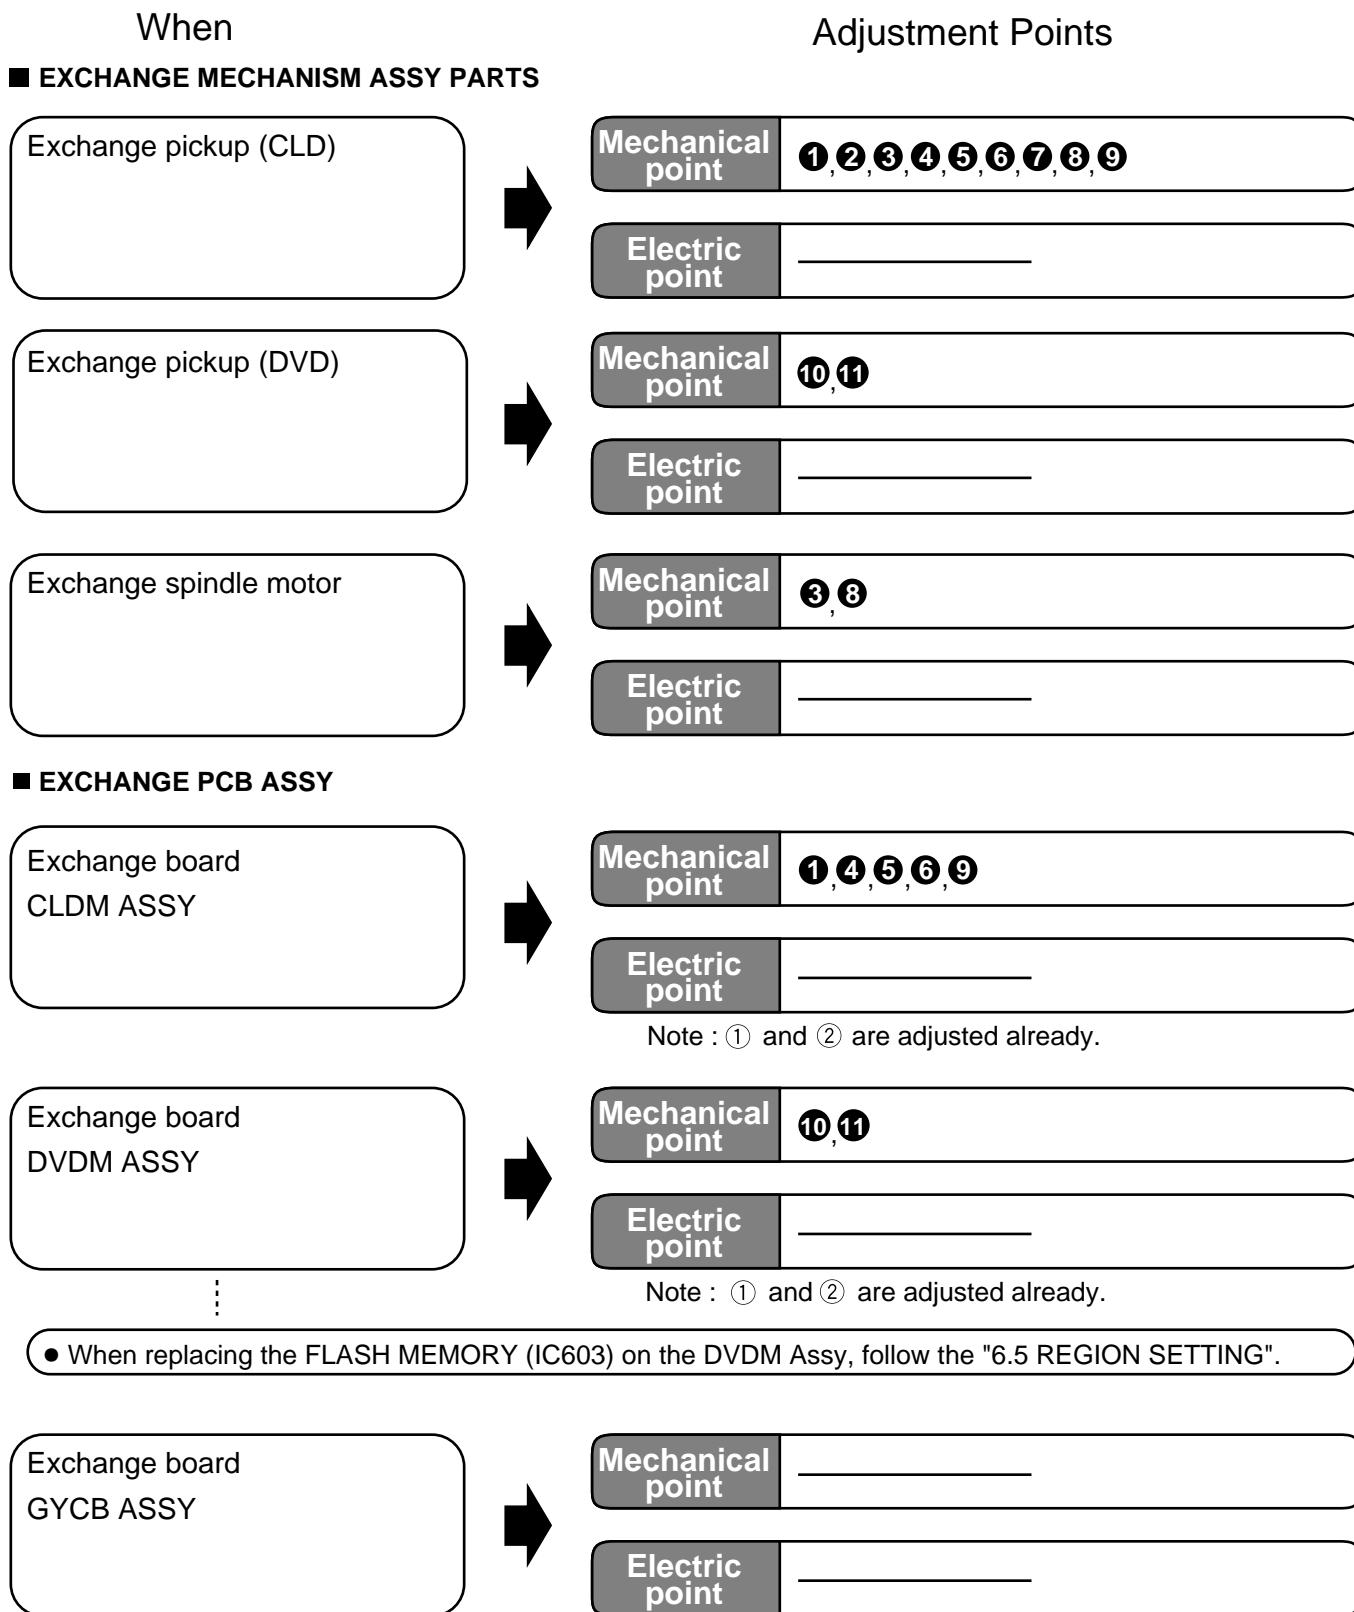


6.5 REGION SETTING

Perform this operation after confirming the region number of each destination on the cover.
Region number decided once can be changed never again.

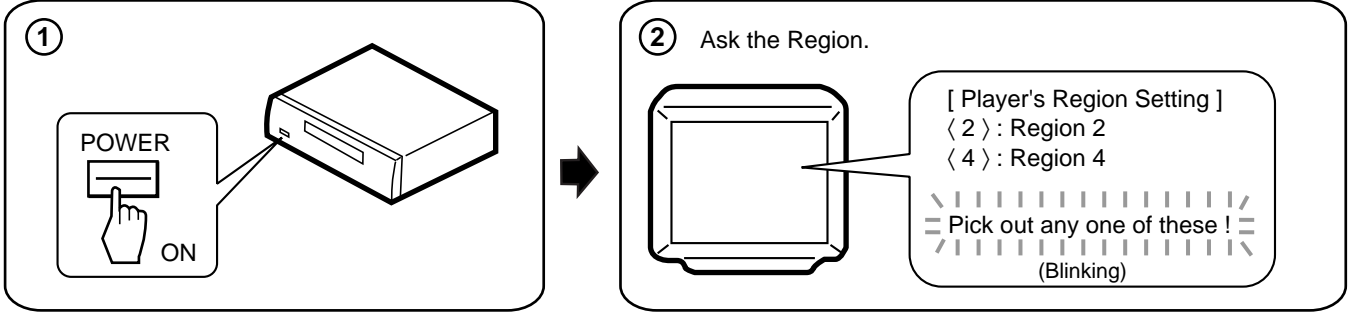


Note : Region is decided by destination of the player automatically, and there is a case when it doesn't ask on this screen. There is not need of this setting at that occasion.

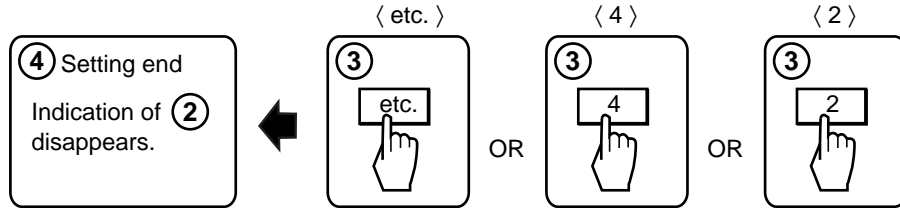


Key input the number with the test mode remote control unit (GGF1067).

6.6 MECHANICAL ADJUSTMENT


1 Tilt Offset Adjustment

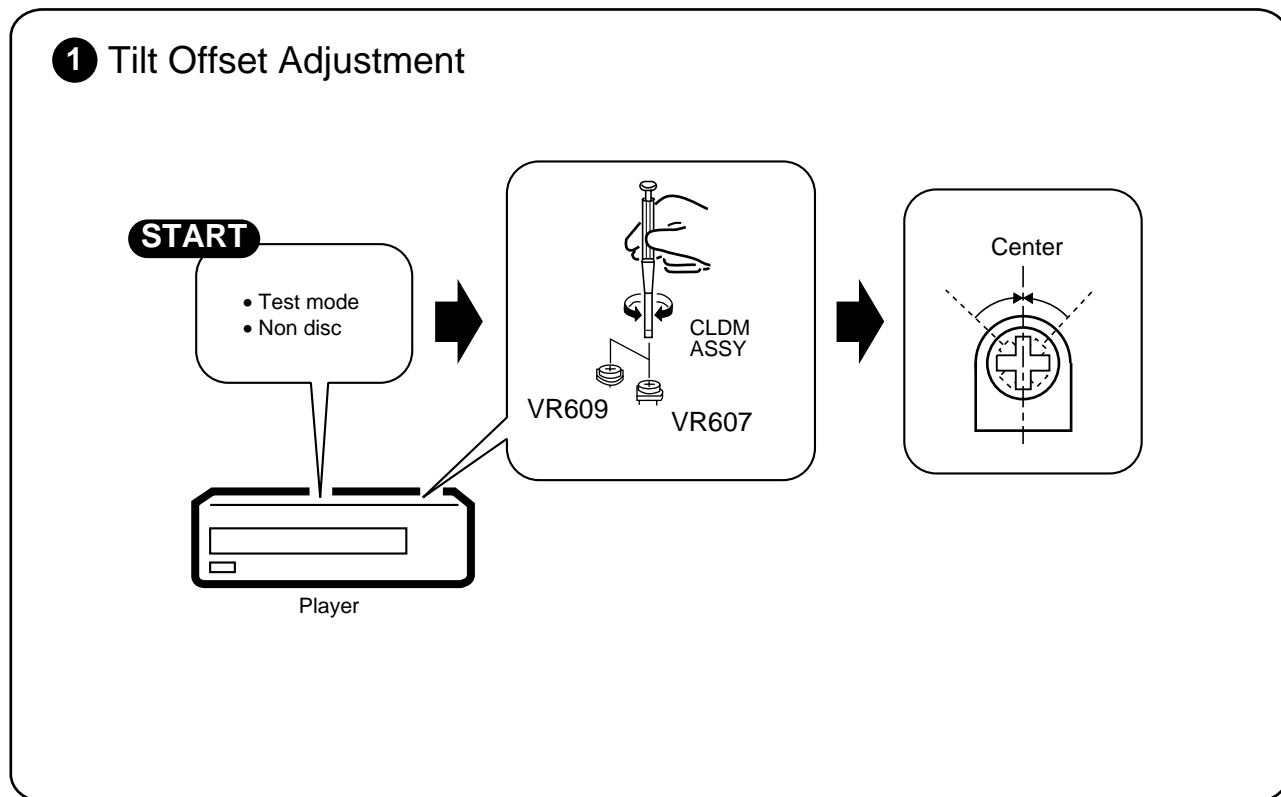


2 Tangential Direction Angle Adjustment for Side A

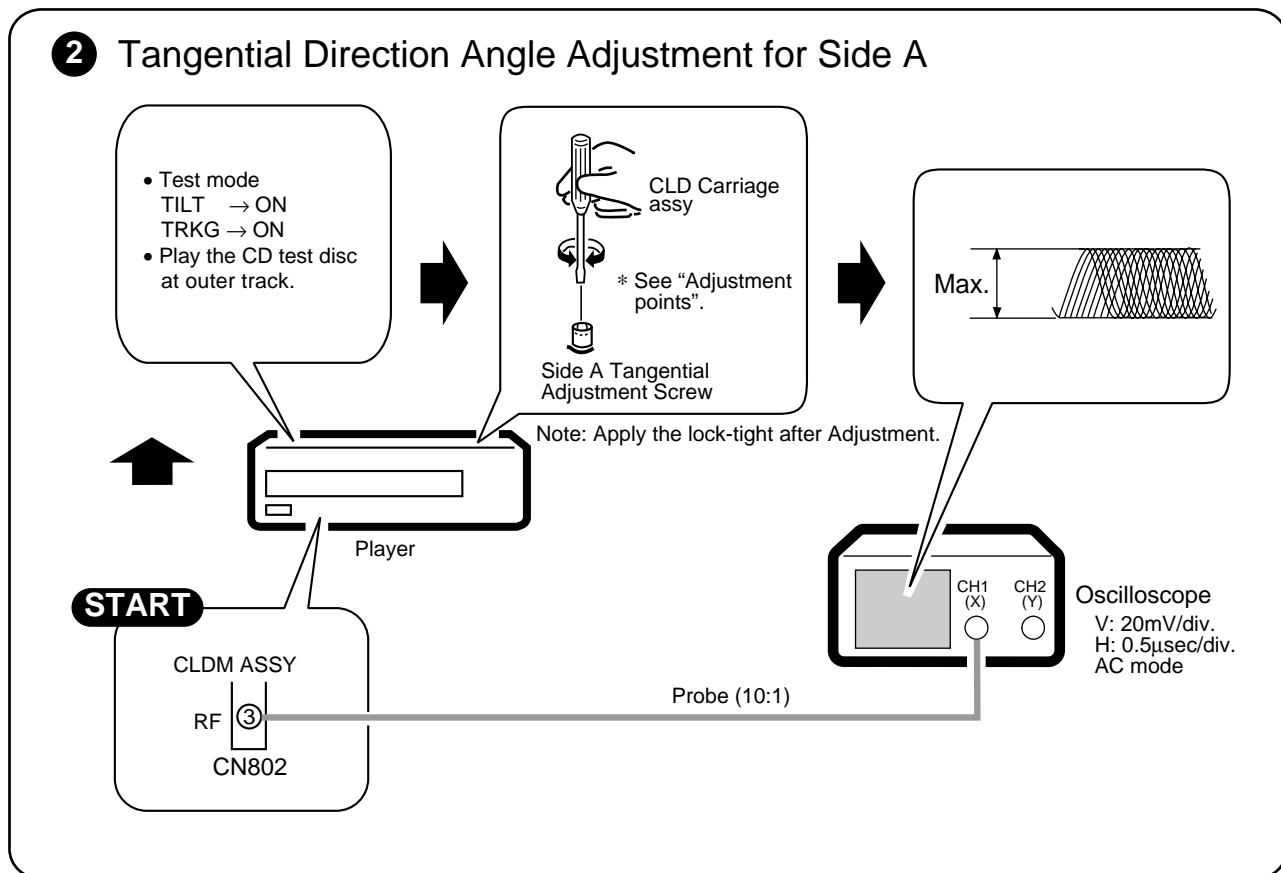


3 Spindle Motor Centering Adjustment for Side A

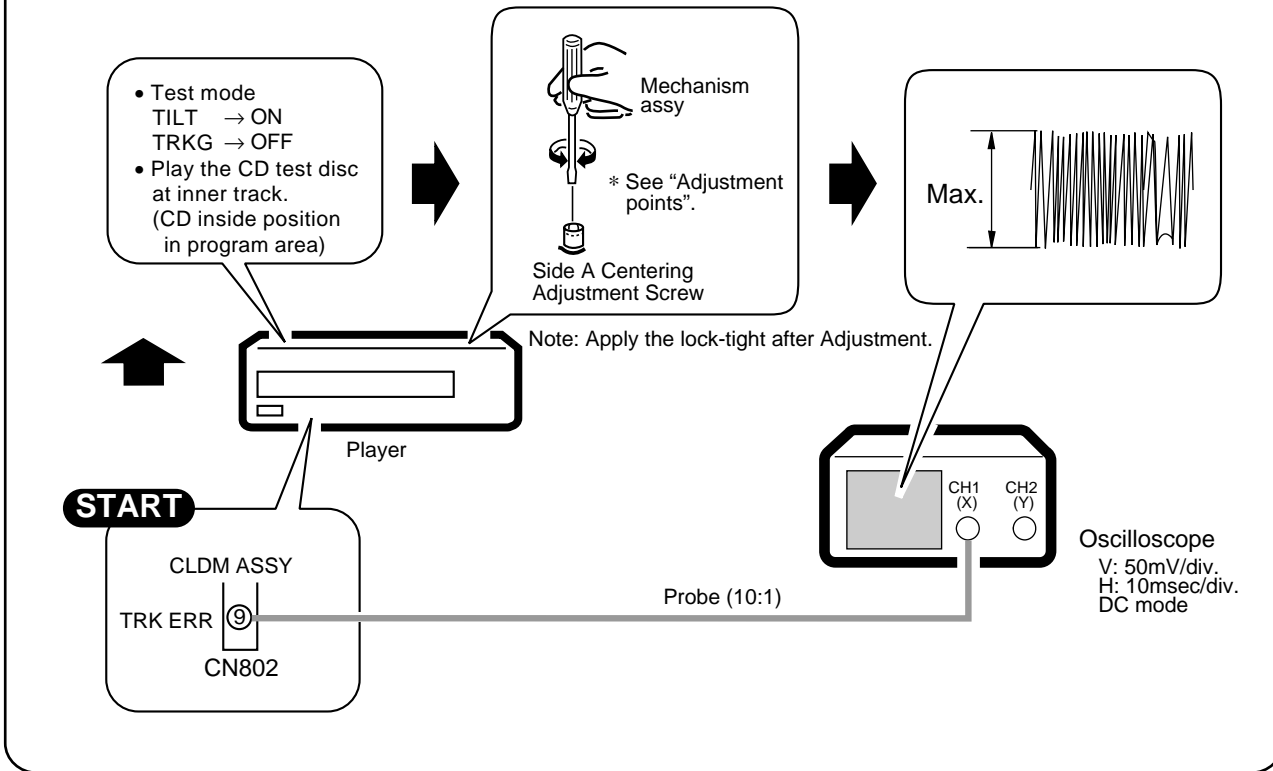


4 Crosstalk Check and Fine Tilt Offset Adjustment for Side A

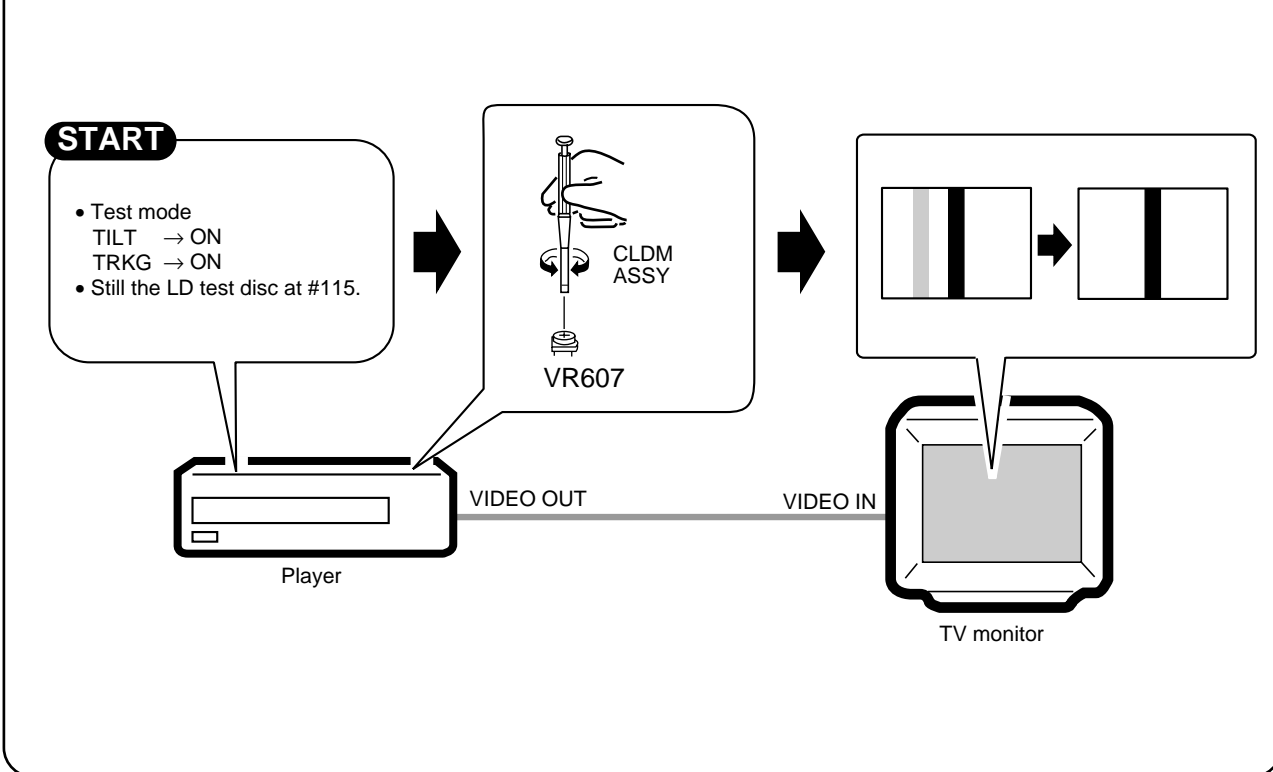


5 Focus Servo Loop Gain Adjustment

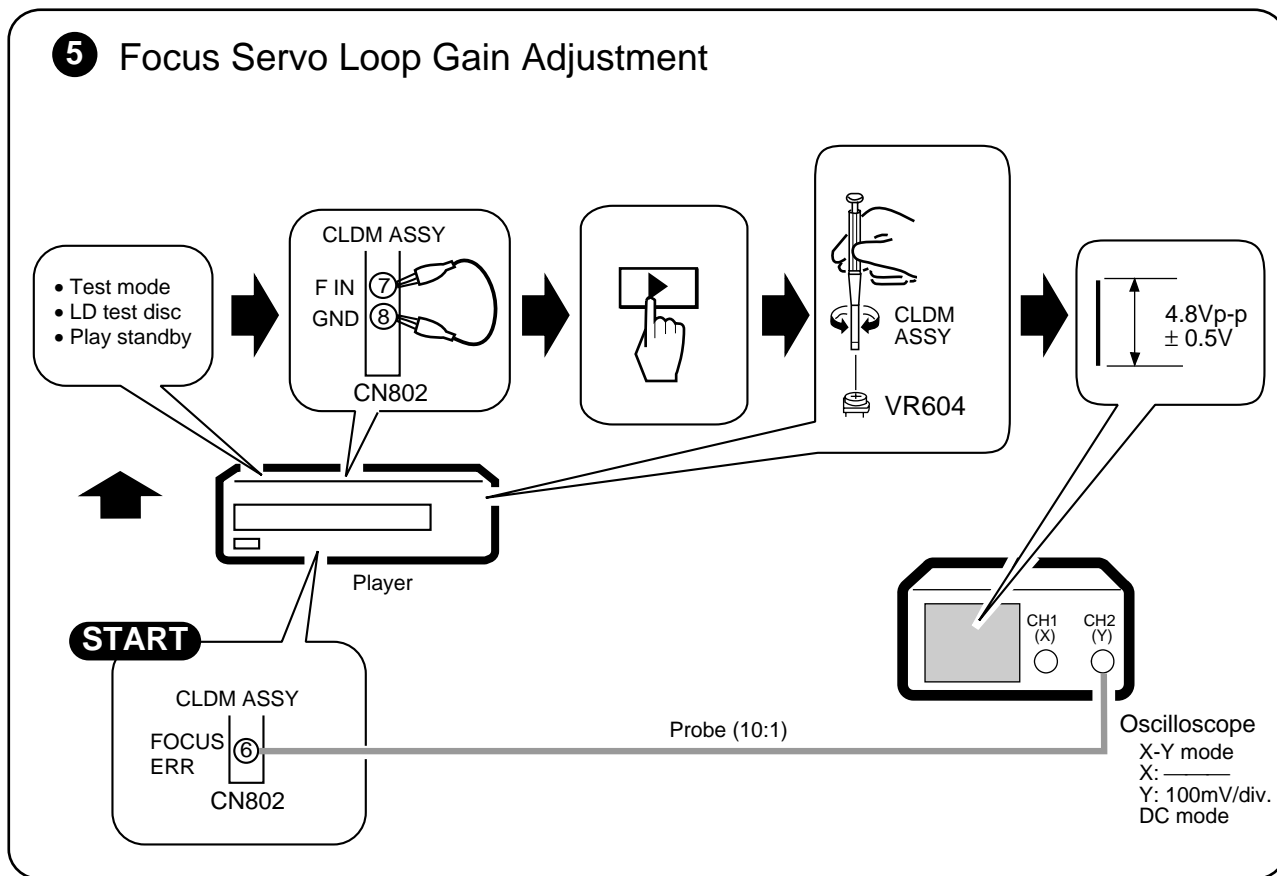


6 Tracking Servo Loop Gain Adjustment

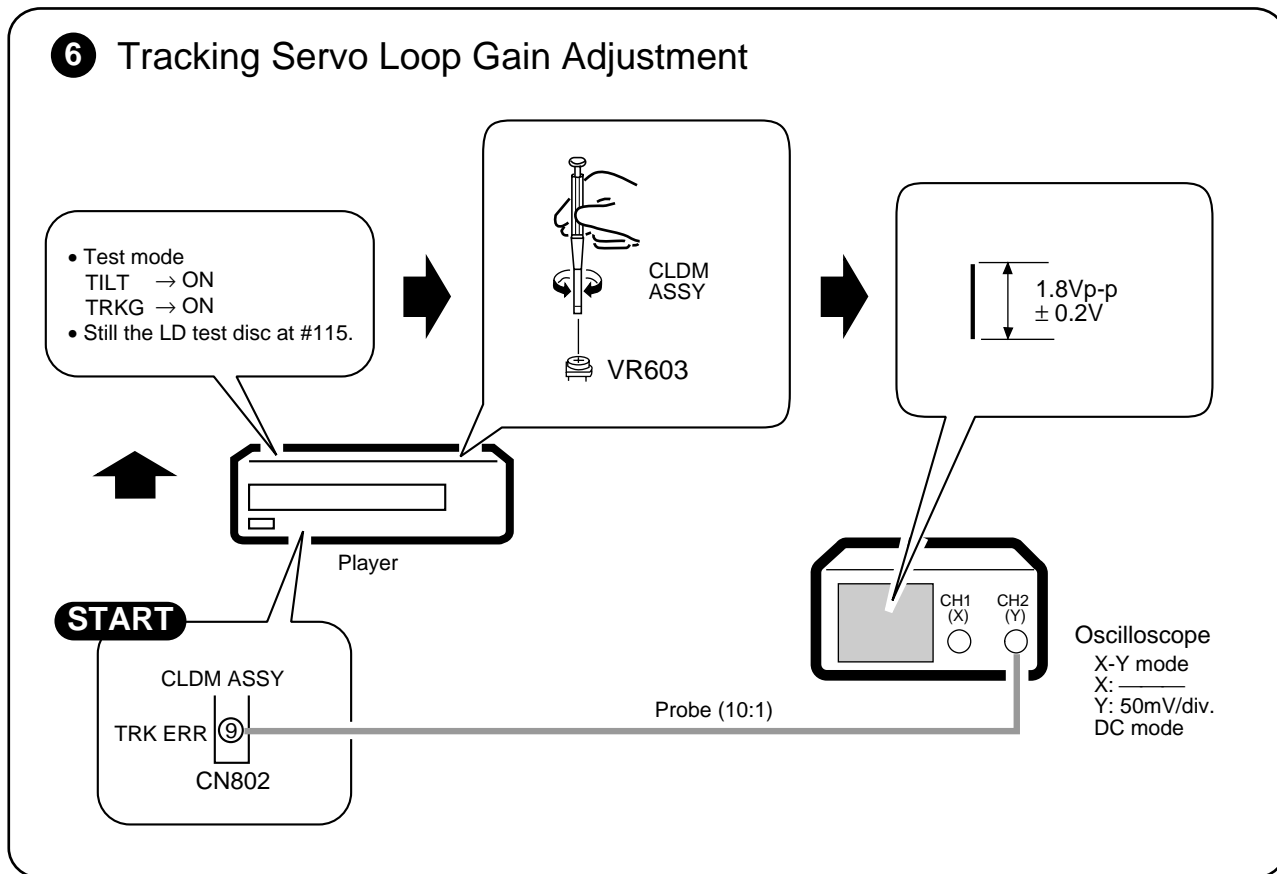


7 Tangential Direction Angle Adjustment for Side B

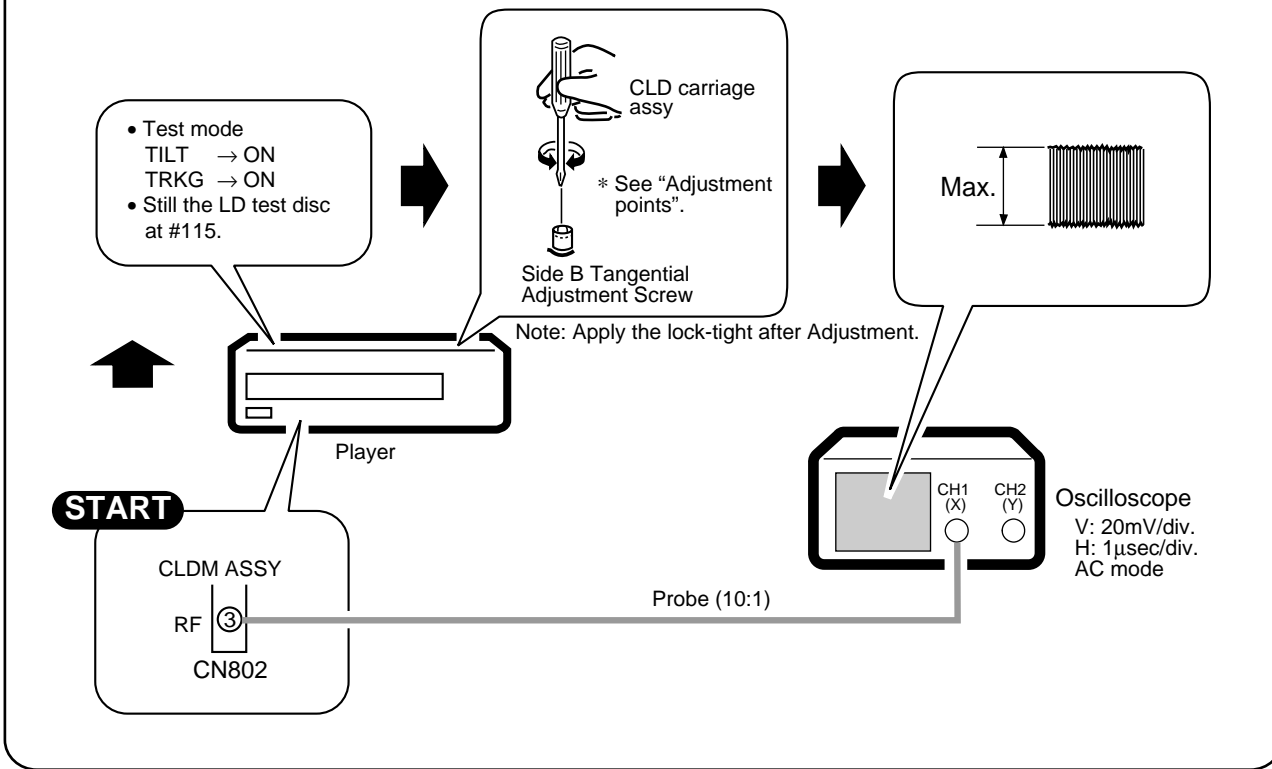


8 Spindle Motor Centering Adjustment for Side B

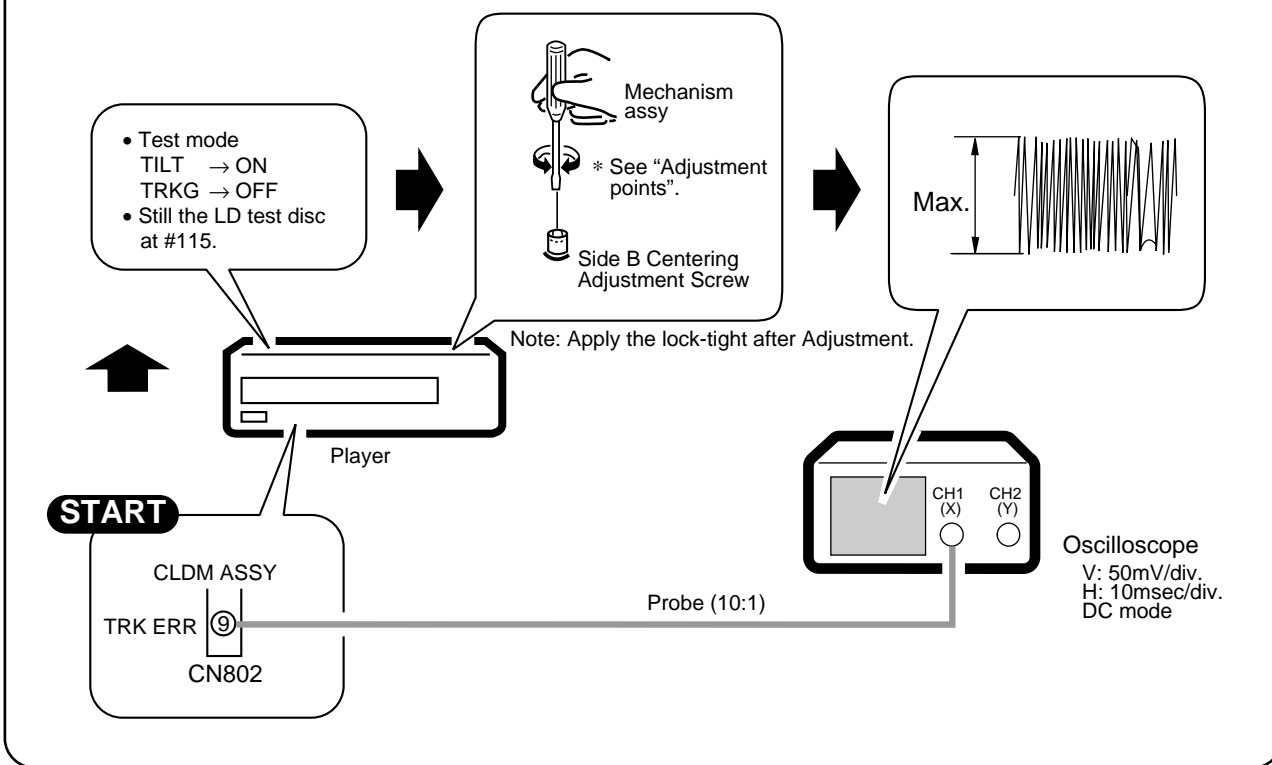


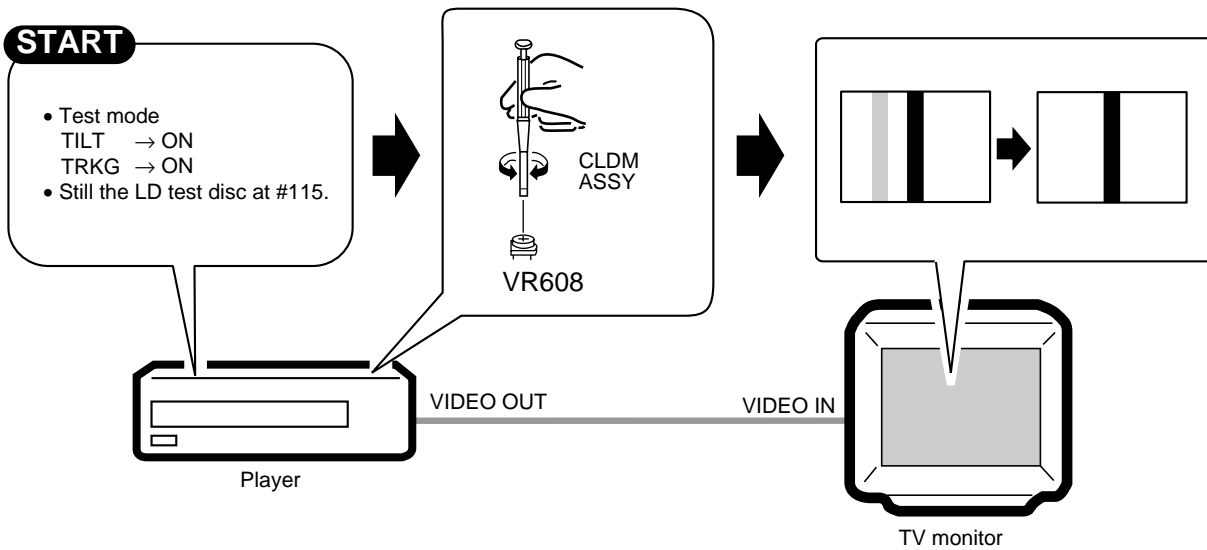9 Crosstalk Check and Fine Tilt Offset Adjustment for Side B



10 RF Max Adjustment

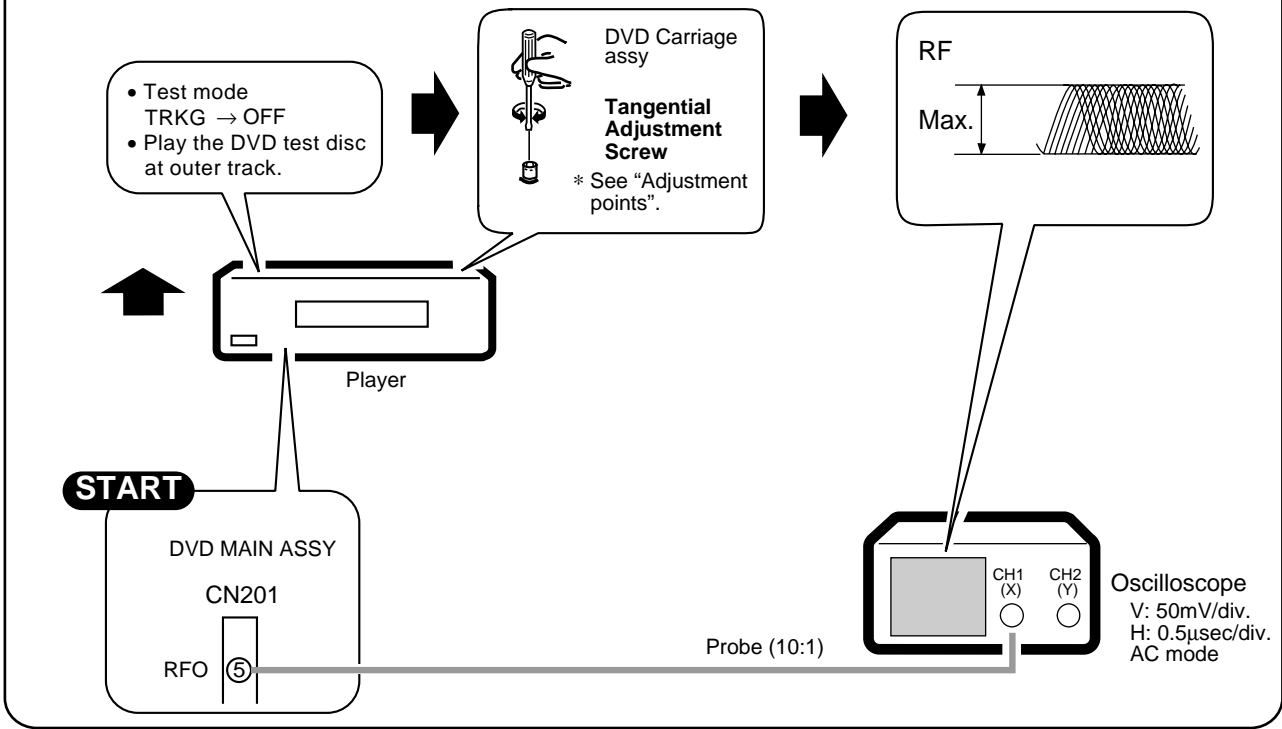

11 DVD Jitter Best Adjustment

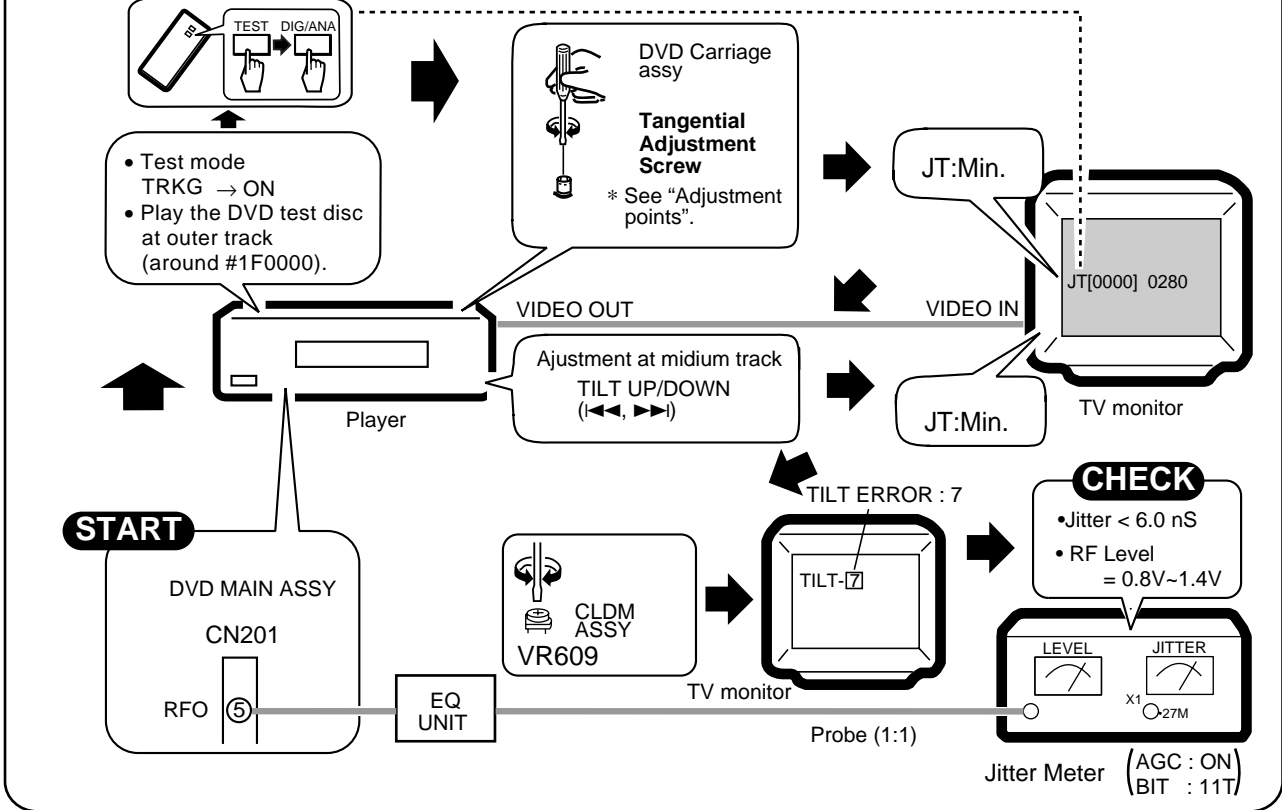


6.7 ELECTRICAL ADJUSTMENT FOR CLDM ASSY

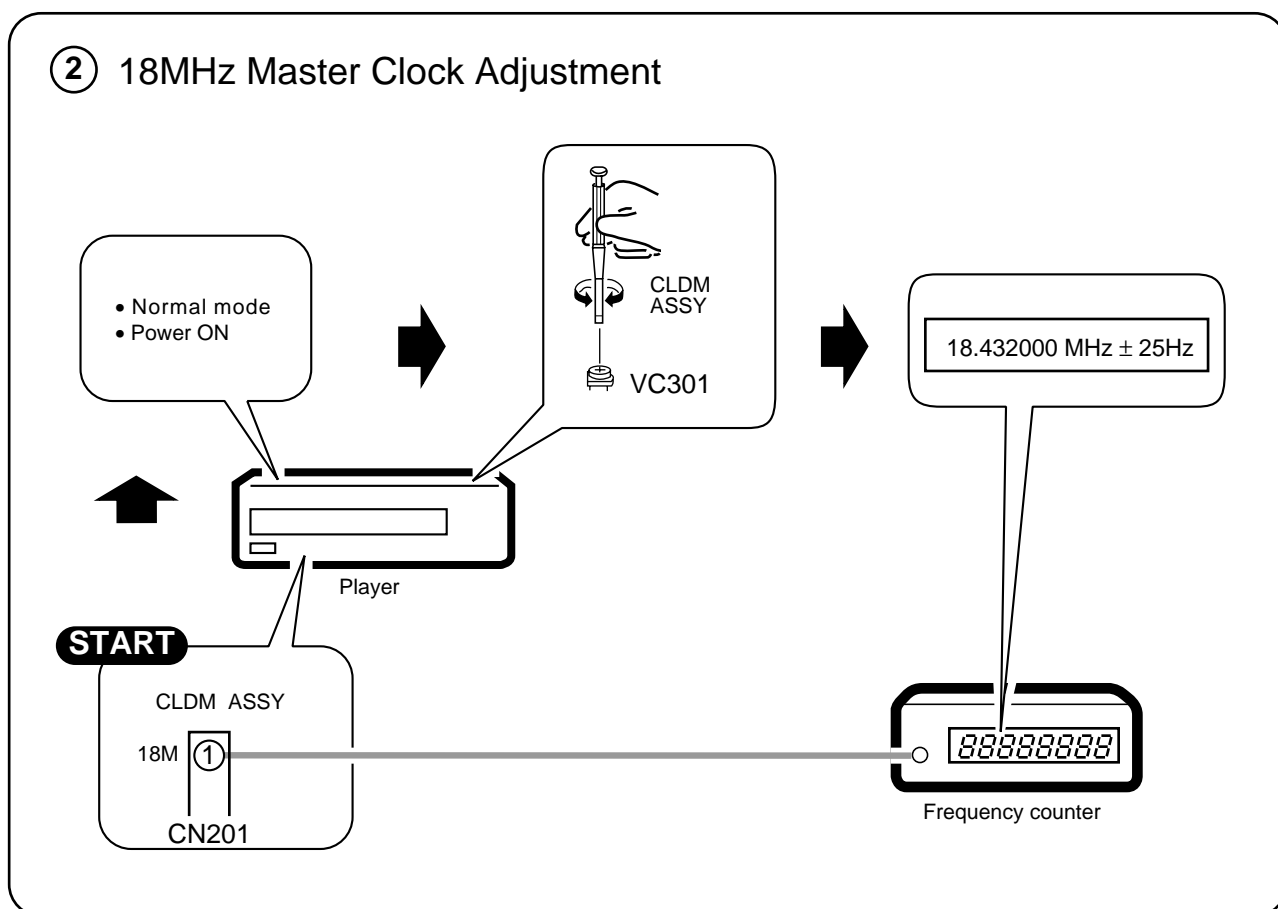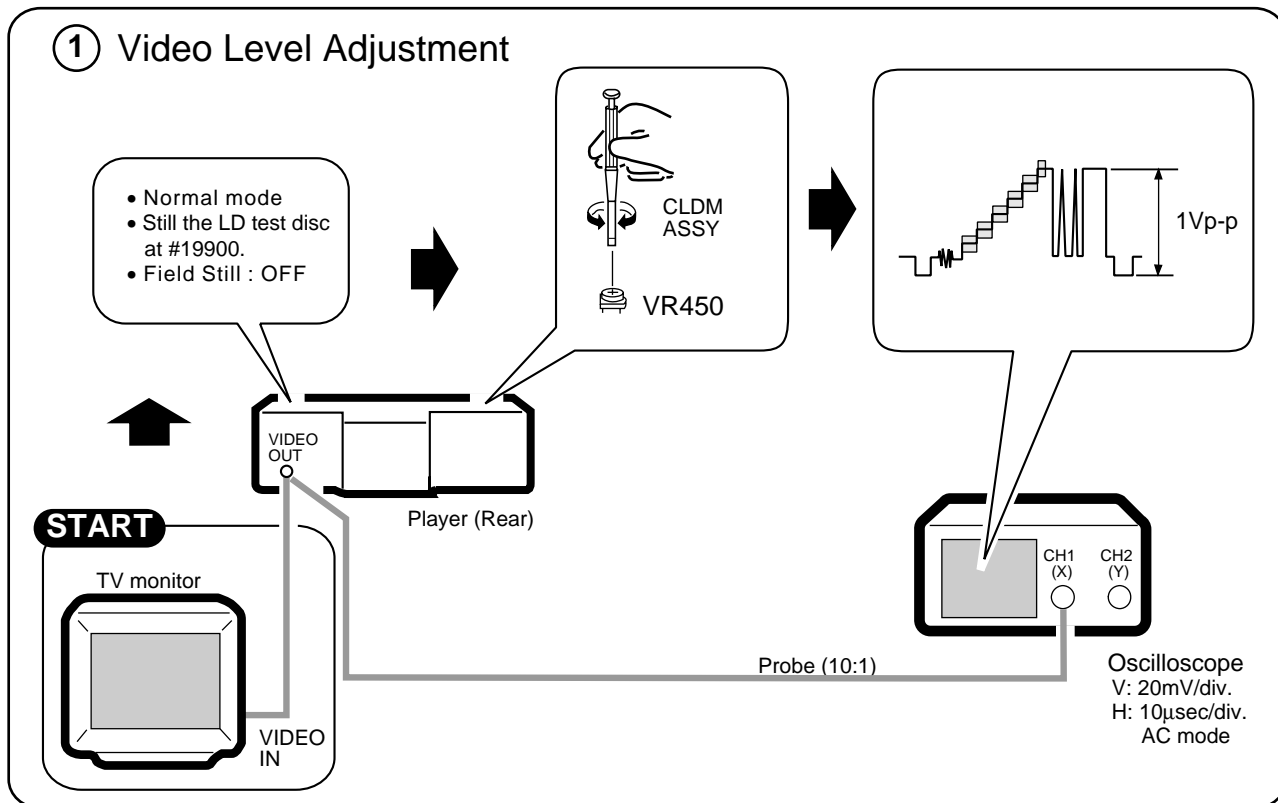


6.8 ELECTRICAL ADJUSTMENT FOR DVDM ASSY

① VCO Offset Adjustment

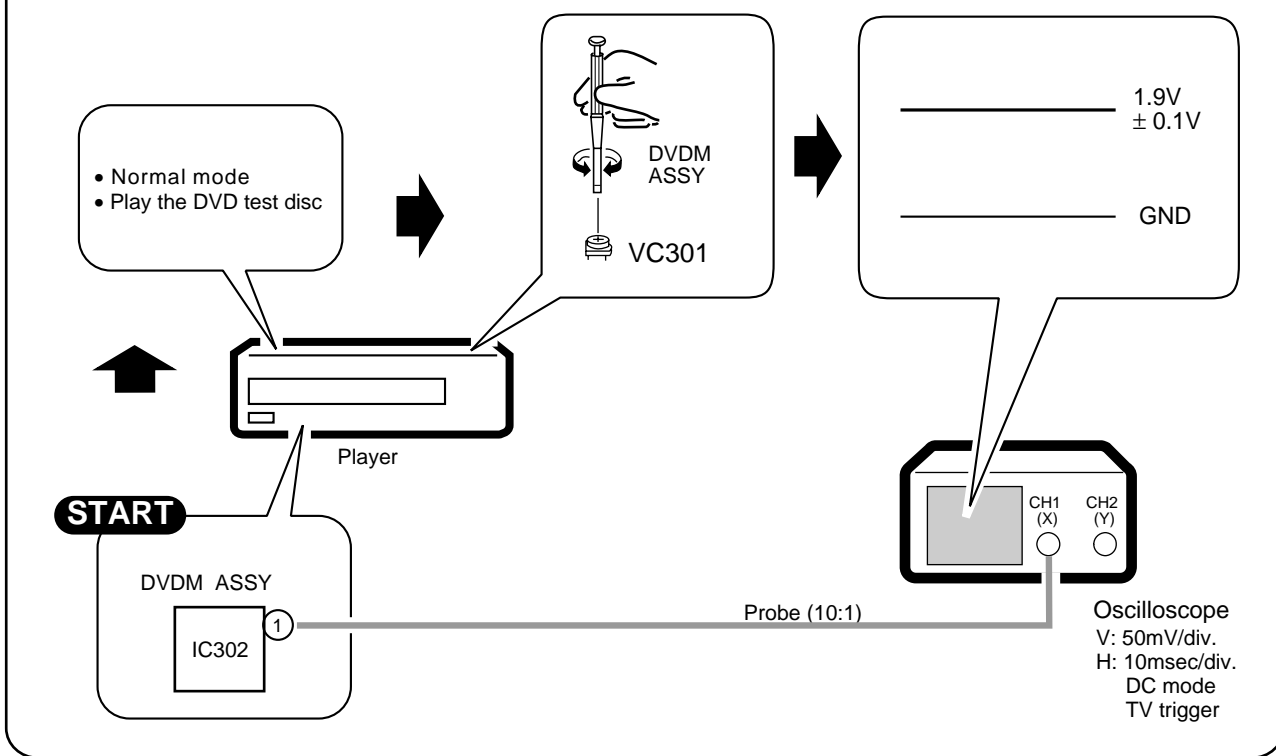


② Video Output Level Adjustment

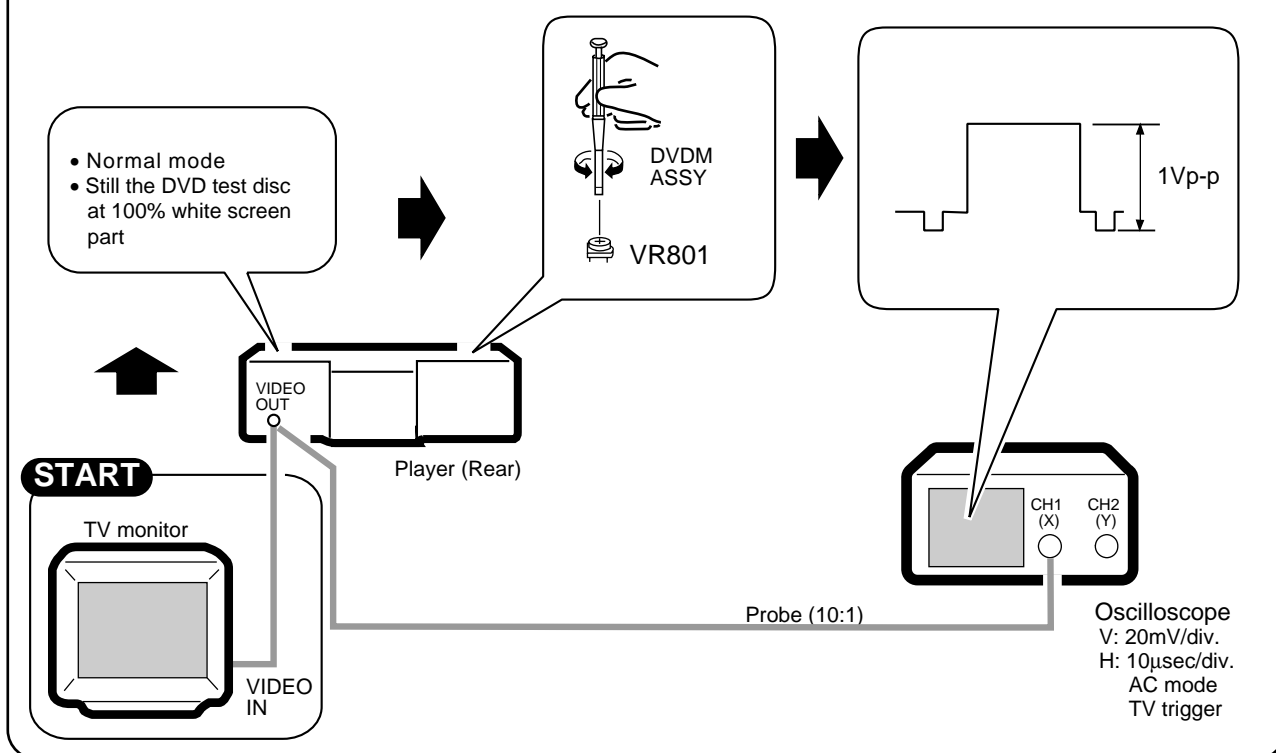


6.9 OPERATIONS IN THE TEST MODE

■ Test Mode Remote Control Unit (GGF1067)

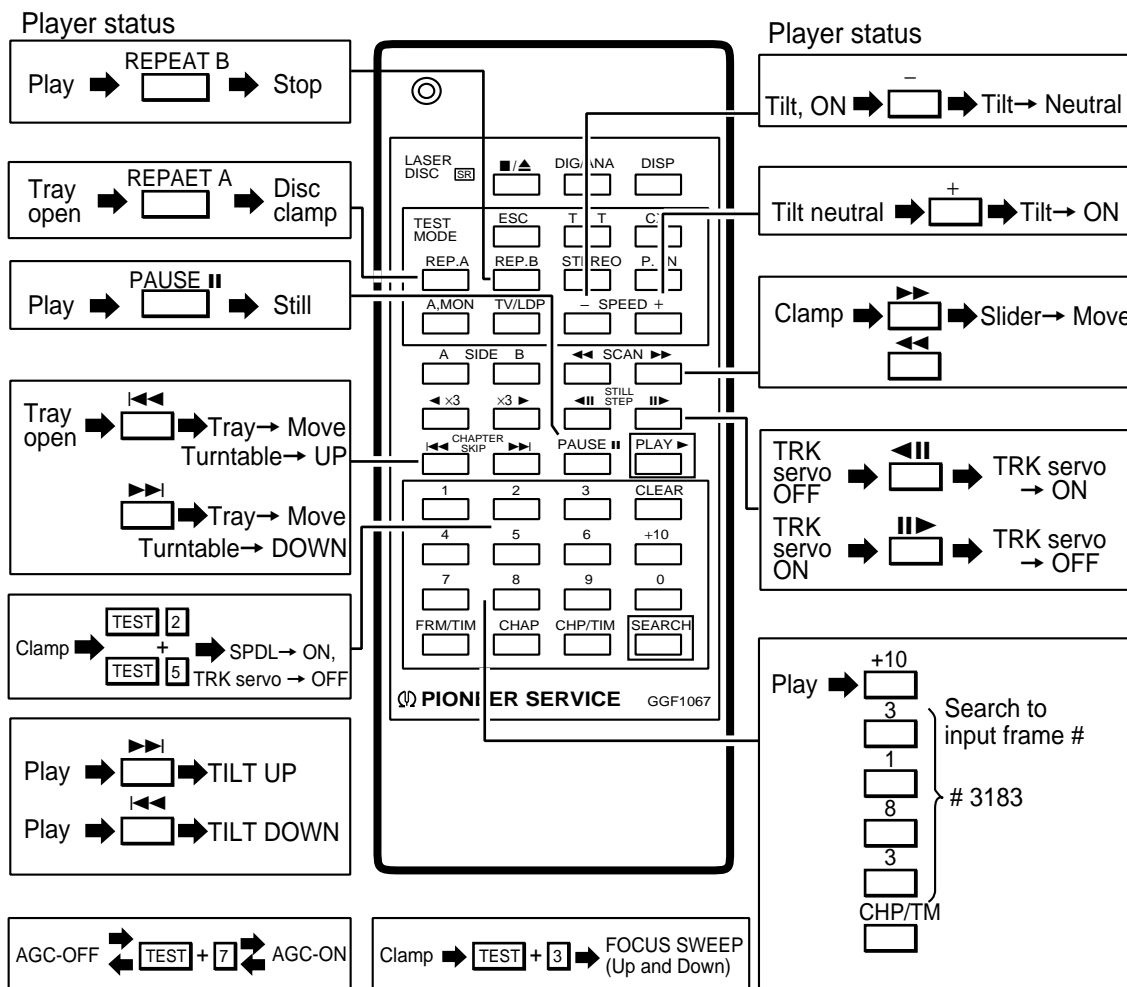


■ TV Monitor Display

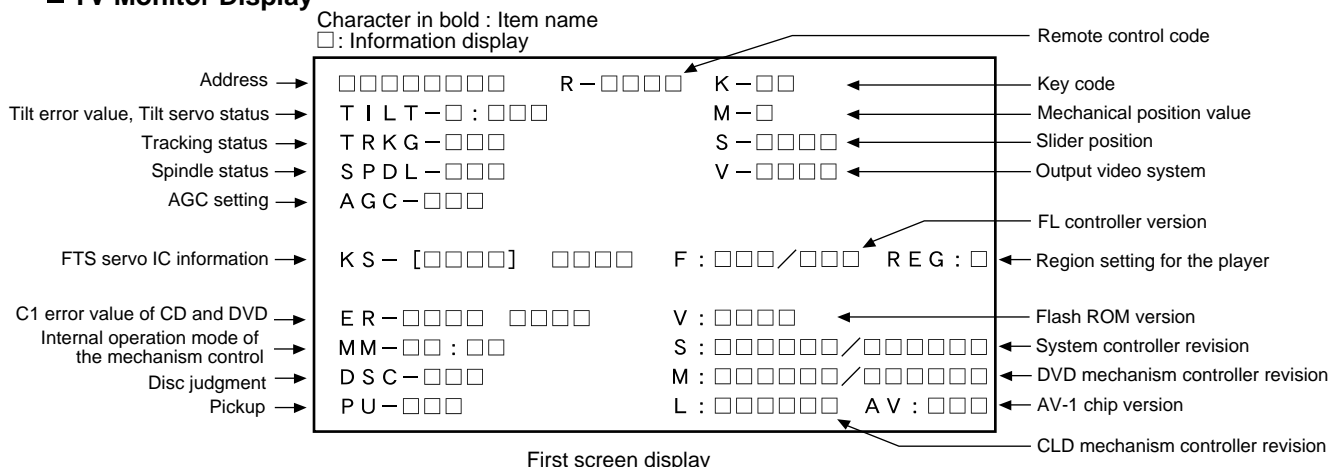

First screen display

Note : Switch the first and second screen by pressing the [DISPLAY] key on the remote control unit.

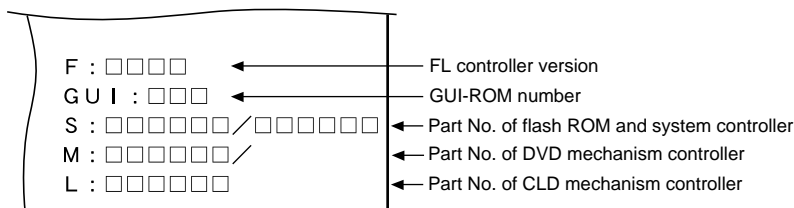

Second screen display (at lower right portion of the screen)

7. GENERAL INFORMATION

7.1 PARTS

7.1.1 IC

- The information shown in the list is basic information and may not correspond exactly to that shown in the schematic diagrams.

■ PD0266A2 (CLDM ASSY : IC101)

- Mechanism Control IC

- Pin Function


No.	Pin Name	I/O	Function
1	VCC	I	Power supply pin Apply 5V ± 10%
2	RWC	O	DSP read/write command signal output "L"= Read "H"= Write
3	XPLAY	O	Signal output during spindle servo "L"= SC PLAY "H"= Others
4	XCQCK	O	DVP/DSP clock switch "L"= DSP "H"= Others
5	XCD	O	LD/CD switch signal output "L"= CD "H"= LD
6	TILT ERR	I	A/D • This signal is A/D converted as the tilt servo control input. Control the tilt motor so that this signal becomes 2.5V.
7	TRK BAL ERR	I	A/D • Tracking balance error signal input This signal is A/D converted as the tracking offset control input.
8	SLD ERR	I	A/D • This signal is A/D converted as the slider servo control input. Control the slider motor so that this signal becomes 2.5V.
9	SLD POS	I	A/D • Pickup position detection switch input Detect the position by reading A/D input value which each switches are resistance divided.
10	FSEQ	I	Subcode sync. confirmity detection signal input "L"= Not confirmity "H"= Confirmity
11	XC DETECT	I	Spindle over-current detection signal input "L" = Over current "H"= Normal
12	TRK BAL DRV	O	PWM • Output the tracking offset signal to PWM output, then use for auto tracking offset. 910 μsec period, tri-state control H, L, Z
13	SHAKE	I/O	Handshake signal for data communication with the DVD mechanism control IC This pin is the bilateral data line and each microprocessor control the Input/Output.
14	RF CORRECTION	O	RF correction switch signal output "H"= Gain UP CD, CDV-A:Low, CAV inner circuit gain up, others are High.
15	SQOUT	I	Command data input from DSP Read out SUBQ
16	COIN	O	Serial 3 data output
17	SCK3/CQCK	O	Serial 3 clock output
18	SLD DRV	O	PWM • Slider control signal output 5V= FWD, 0V= REV, 2.5V= STOP 910 μsec period, tri-state control
19	SI1	I	Serial data input from the DVD mechanism control IC
20	SO1	O	Serial data output to the DVD mechanism control IC
21	SCK1	I/O	Clock for serial communication with the DVD mechanism control IC Becomes input mode without communicate with the DVD mechanism control IC
22	TRK 0 CRS	I	INT • Tracking error zero cross signal input Monitor this signal when searching track count in the miss clamp detection
23	SBSY	I	Subcode block sync. input
24	TILT OUT	I/O	LOAD/TILT control output PWM output 0V : Tray IN / Tilt DOWN, 5V : Tray OUT / Tilt UP, 2.5V : STOP
25	TURN OUT	O	Turn drive signal output
26	XPBV	I	Playback vertical sync. signal input of LD/CDV "L"= During vertical sync.
27	CNVSS	I	Ground for A/D conversion
28	XRESET	I	Reset signal input "L"= Reset "H"= Release reset
29	XIN	I	9MHz clock oscillation input
30	XOUT	O	9MHz clock oscillation output

No.	Pin Name	I/O	Function
31	N.C.	O	Not used
32	GND	I	Ground
33	MSW1	I	Switch input for Loading/Tilt position detection
34	MSW3		
35	MSW2		
36	TBCLOCK	I	Spindle lock signal input "L"= Unlock "H"= Lock
37	FG	I	Spindle motor FG signal input
38	DATA	I	Input for Phillips code decoder with built-in mechanism controller
39	XPBH	I	Playback H-SYNC input for Phillips code decoder
40	XPBV	I	Playback V-SYNC input for Phillips code decoder
41	DEXT	O	Control signal output of video dynamic range extension "H"= ON "L"= OFF
42	WFM	I	WFM : with memory
43	LATMEM	O	Serial control latch output of memory control IC PD3212A Latches at falling edge.
44	YCAACK	O	3 line digital comb IC PD6148 ACK input
45	XYCINH	O	3 line digital comb IC PD6148 Communication data switch output
46	XANRH	O	Analog NR level "L"= low "H"= high
47	THOLD	I	Track jump accelerating / decelerating signal input "L"= Others "H"= During accelerating / decelerating
48	LATDVP	O	PD0234 serial latch signal output Latches at falling edge.
49	SELTZC	O	TZC switch signal output "H"= at normal "L"= at CD/DVD disc discrimination
50	DOCINH	O	Control the clamp pulse and clamp killer circuit by tri-state value
51	XANRON	O	Control signal output of analog NR "L"= ON "H"= OFF
52	NROFF	O	Noise reduction control output by VDEM "L"= Normal "H"= Not NR
53	DSCEXST	I	Disc present/absent detecting signal input by the tilt sum in the DVD P.U. mode "H"= Absent "L"= Present DEFECT input at LD P.U.
54	XTURNB	I	Turn switch input "H"= Side A / turn "L"= Side B
55	XTURNA	I	Turn switch input "H"= Side B / turn "L"= Side A
56	XLPO	I	LD P.U. out position detecting switch input "H"= LD P.U. active "L"= LD P.U. out position
57	VDET	I	Use for power abnormal signal input port "L"= Normal "H"= Abnormal
58	XFOK	I	Focus servo lock signal input "L"= Lock "H"= Unlock Use for lock detection of focus servo
59	WRQ	I	Subcode Q reading OK signal input "L"= NG "H"= OK This pin will be H when subcode Q data passed by CRC check.
60	AC3MUTE	O	Mute control signal output for AC3 Release MUTE during playback. "L"= Release MUTE "H"= MUTE
61	SQ1	O	Analog audio switching signal output 1/L "L"= Squelch OFF "H"= Squelch ON
62	SQ2	O	Analog audio switching signal output 2/R "L"= Squelch OFF "H"= Squelch ON
63	XCX	O	Analog audio CX noise reduction switching signal output "L"= CX ON "H"= CX OFF
64	XANA	O	Digital / Analog audio switching signal output "L"= Analog "H"= Digital

7.2 DISASSEMBLY/ASSEMBLY


(1) DISC TRAY

- Disassembly : ① → ② → ③ → ④ → ⑤
- Assembly : ⑤ → ①

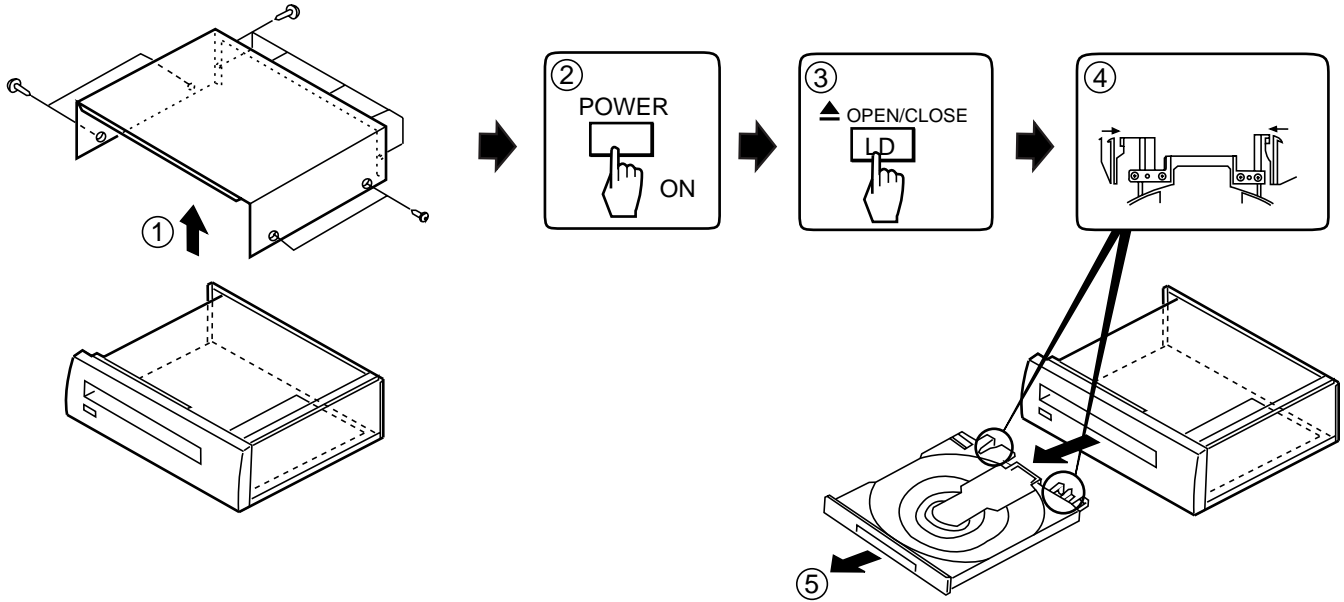


(2) DVDM ASSY

- Disassembly : ① → ② → ③ → ④
- Assembly : ④ → ③ → ② → ①

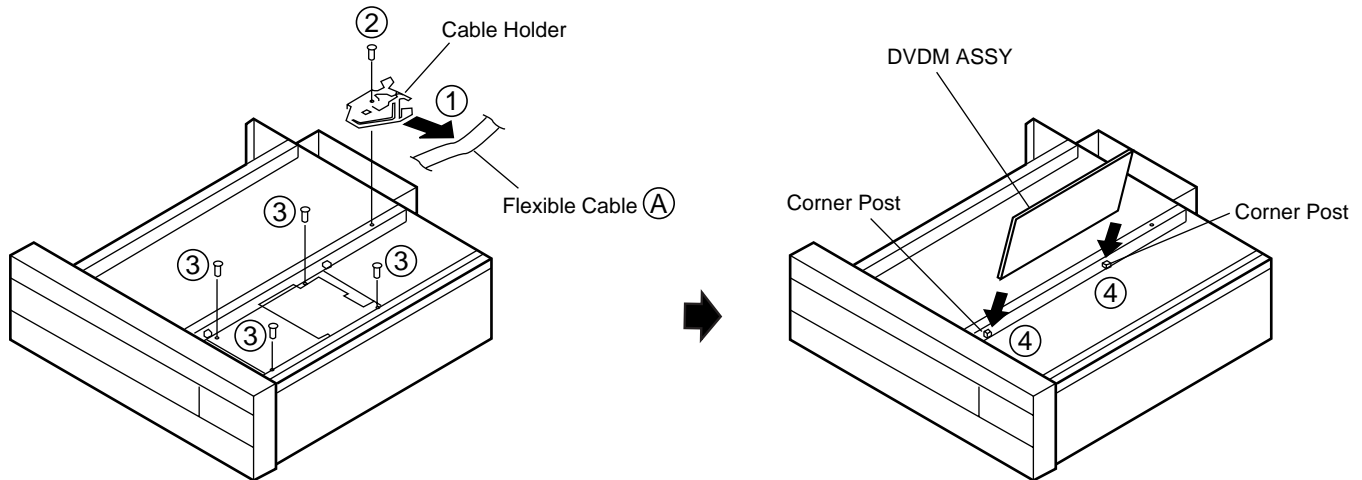



(3) CLDM ASSY

- Disassembly : ① → ② → ③ → ④ → ⑤ → ⑥ → ⑦ → ⑧
- Assembly : ⑧ → ⑦ → ⑥ → ⑤ → ④ → ③ → ② → ①

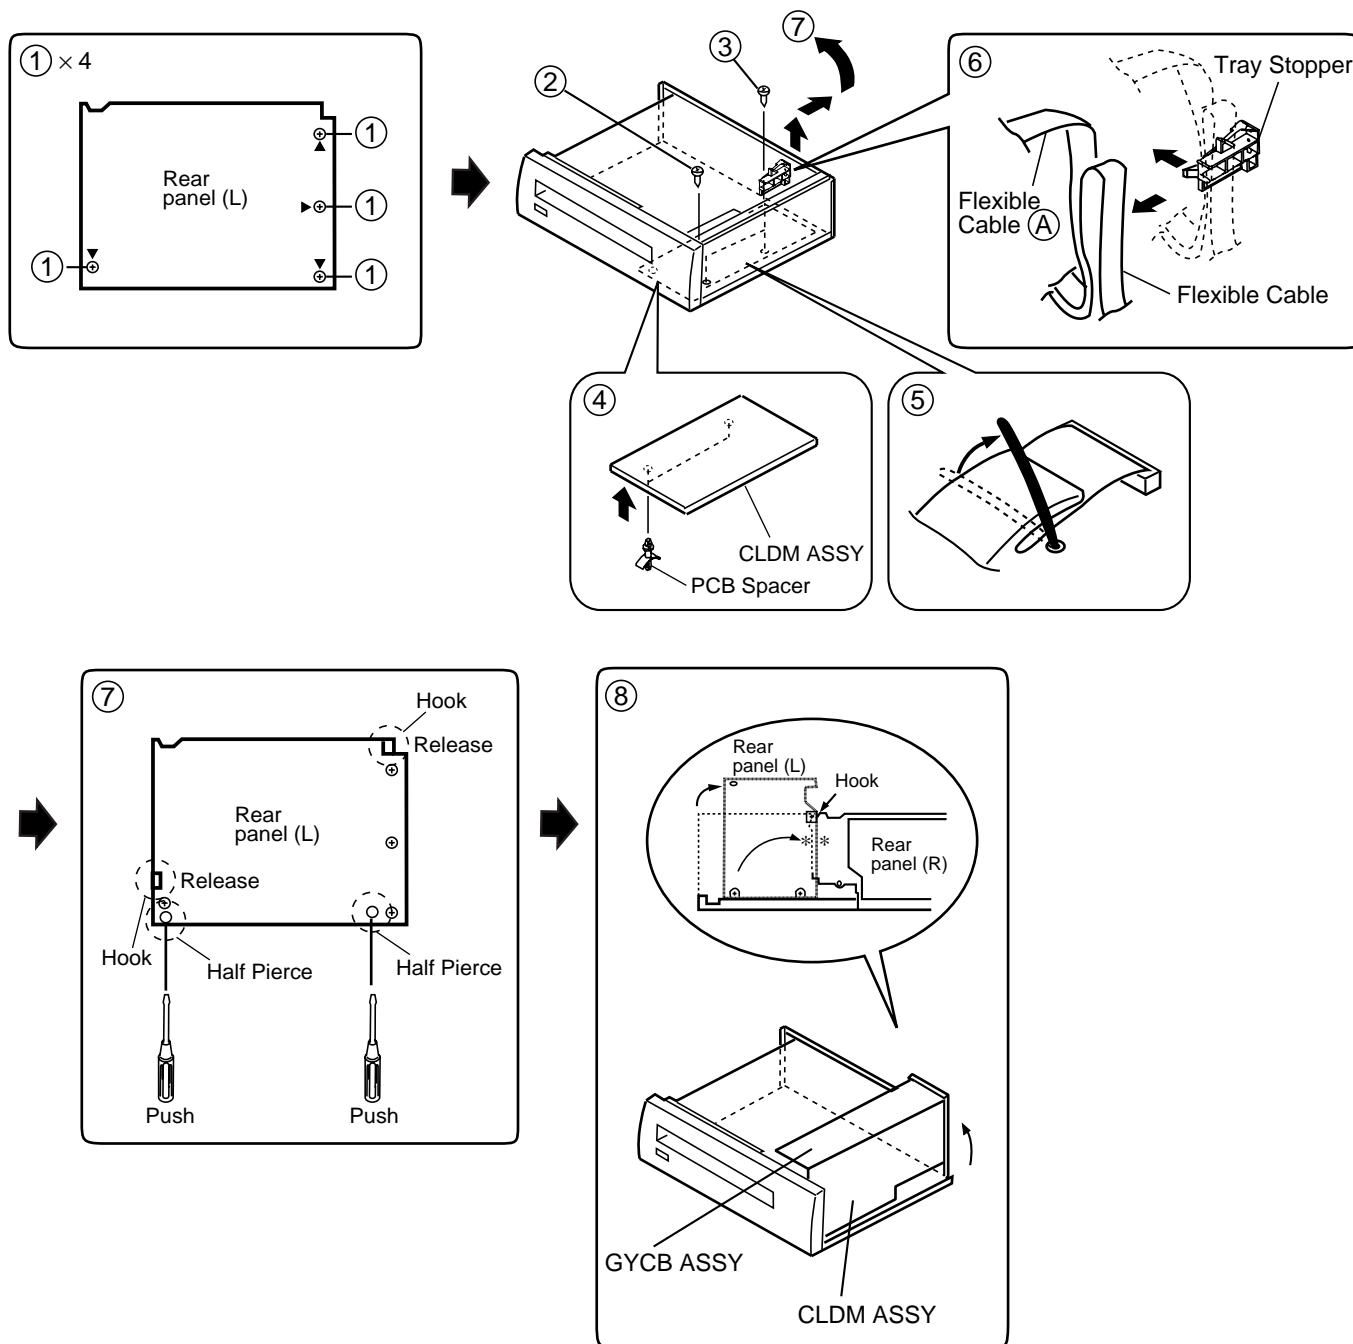

7.3 BLOCK DIAGRAM

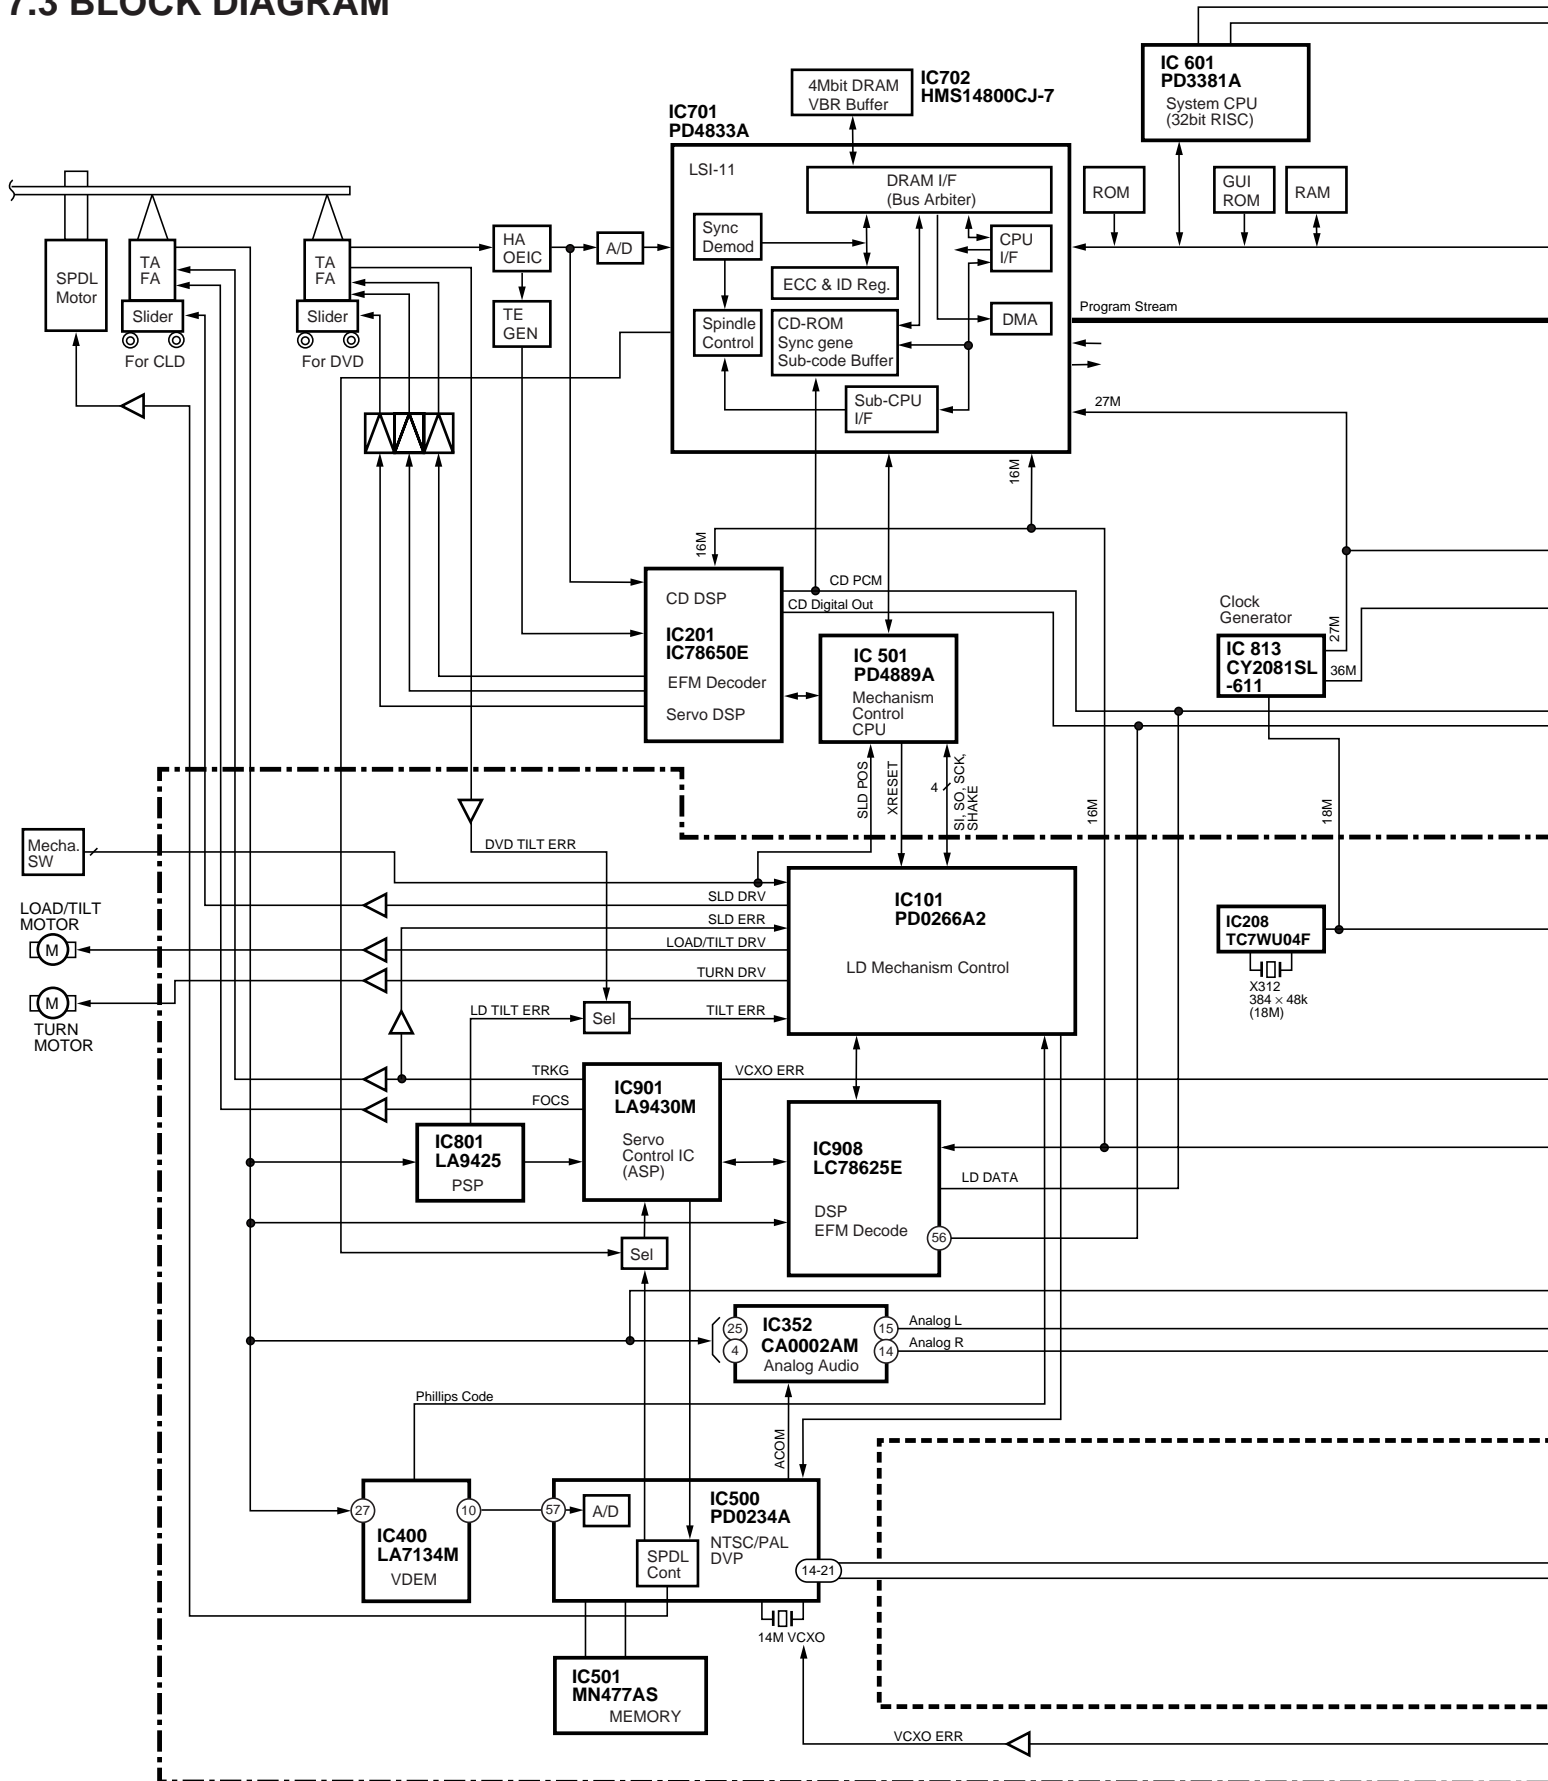


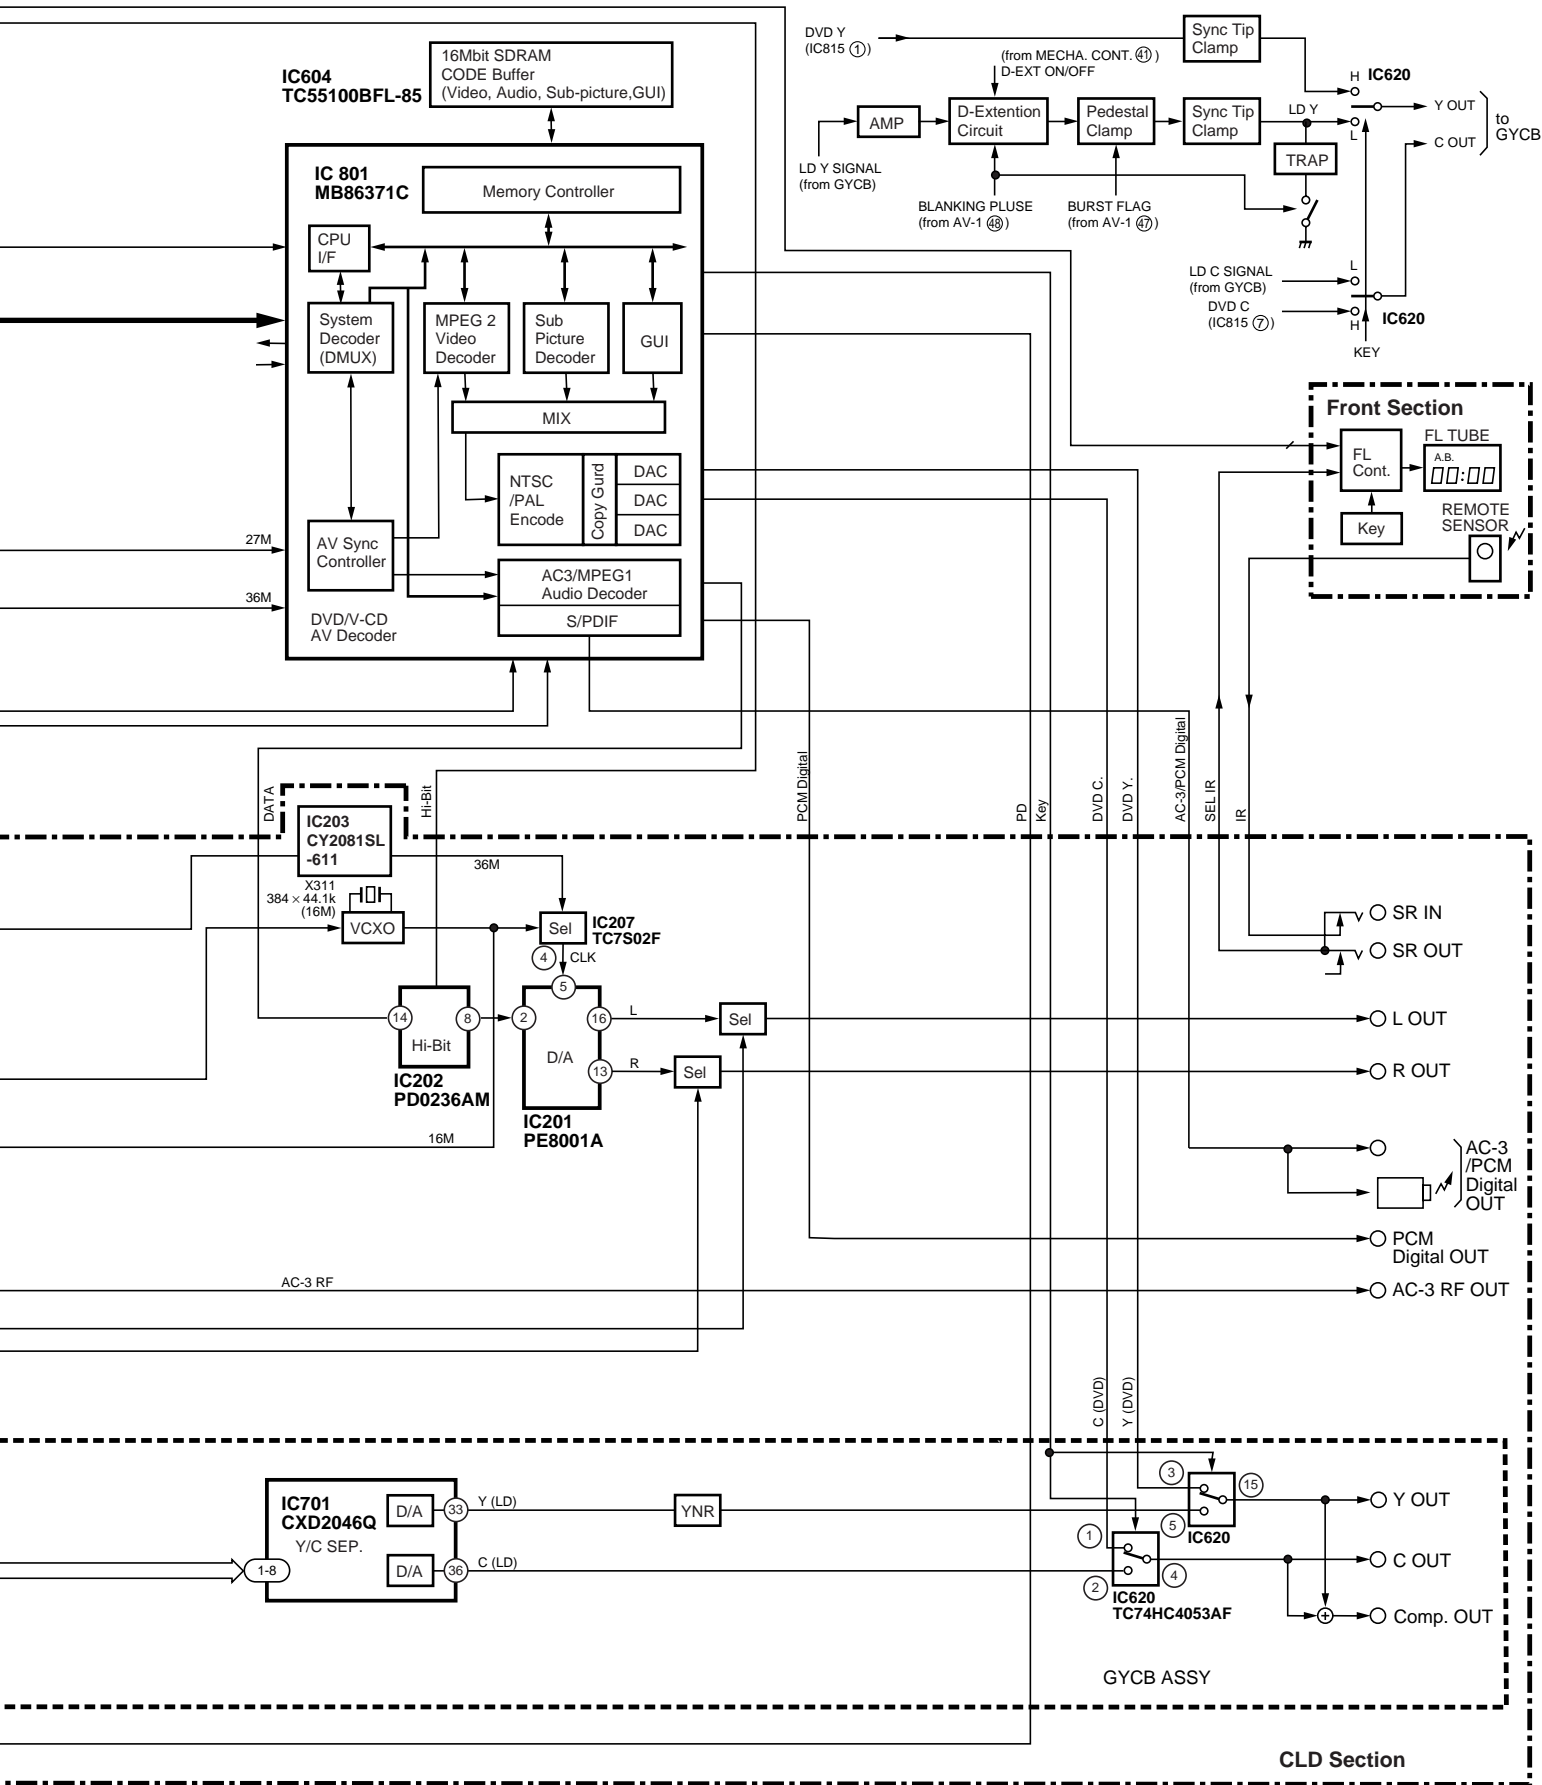

8. PANEL FACILITIES AND SPECIFICATIONS

FRONT PANEL


The following illustration shows the Flat blade 2-pin AC plug model.

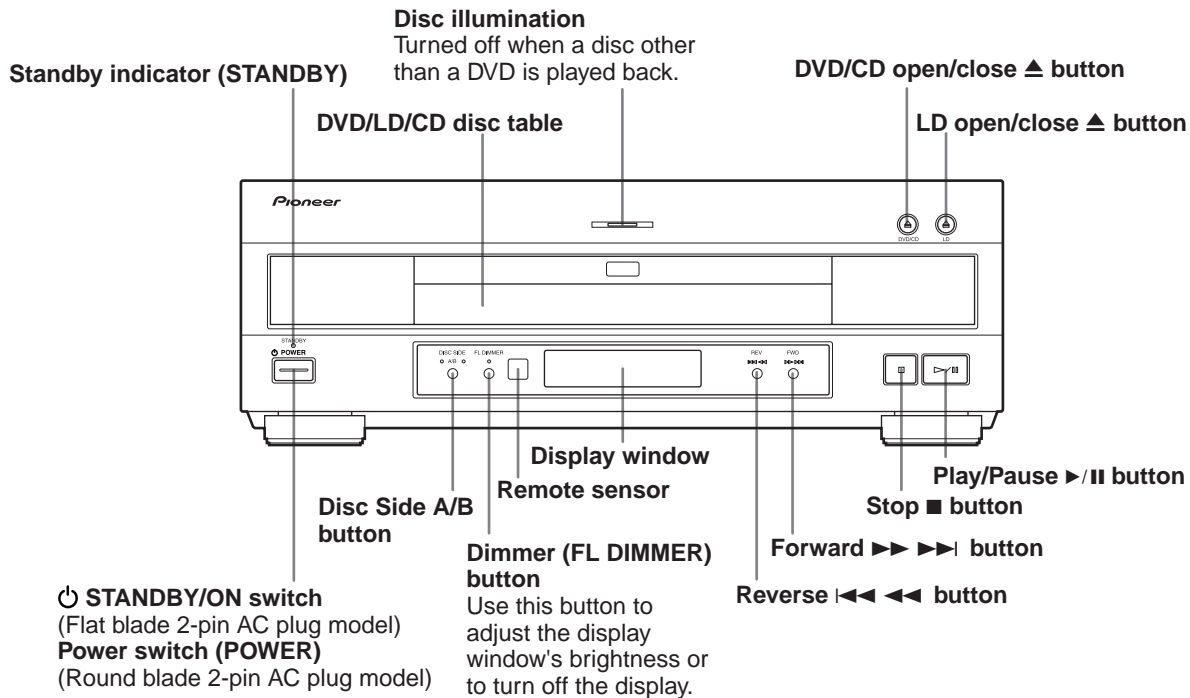

DISPLAY WINDOW

When you press the FL DIMMER button, the brightness of the display window changes among the following settings.


Bright → Semi-dark → Dark → off

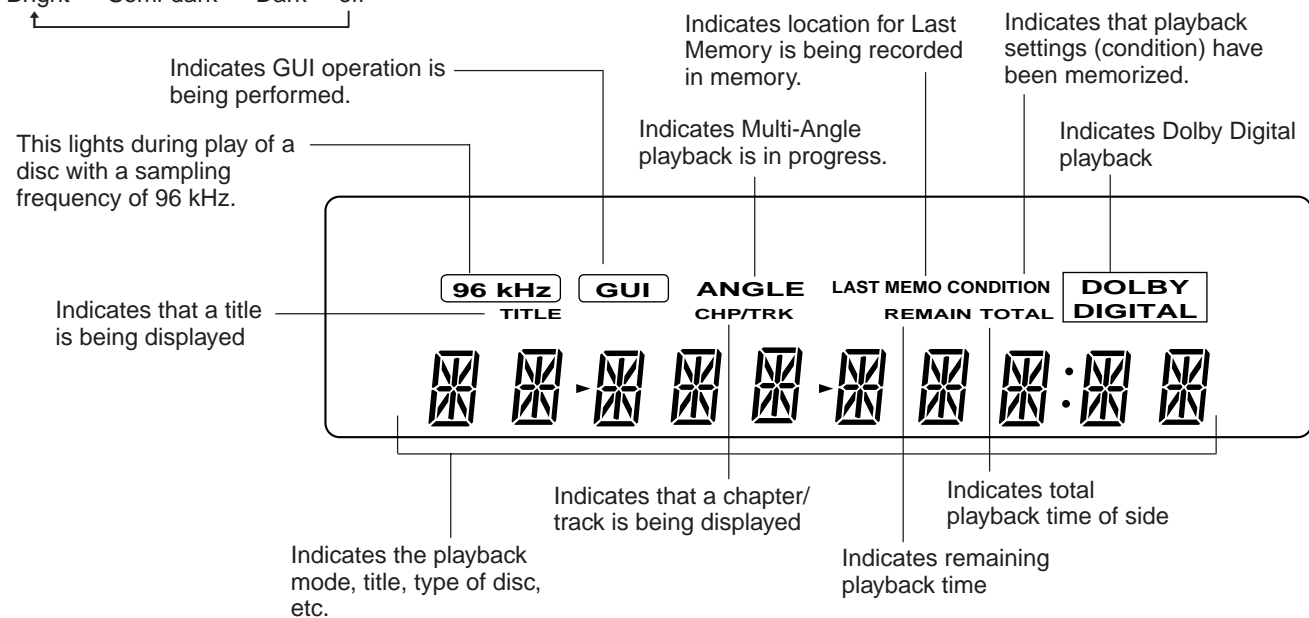

■ REAR PANEL


Digital output jacks (coaxial and optical)

These provide digital audio output. Select the digital output settings that best suit your amplifier.

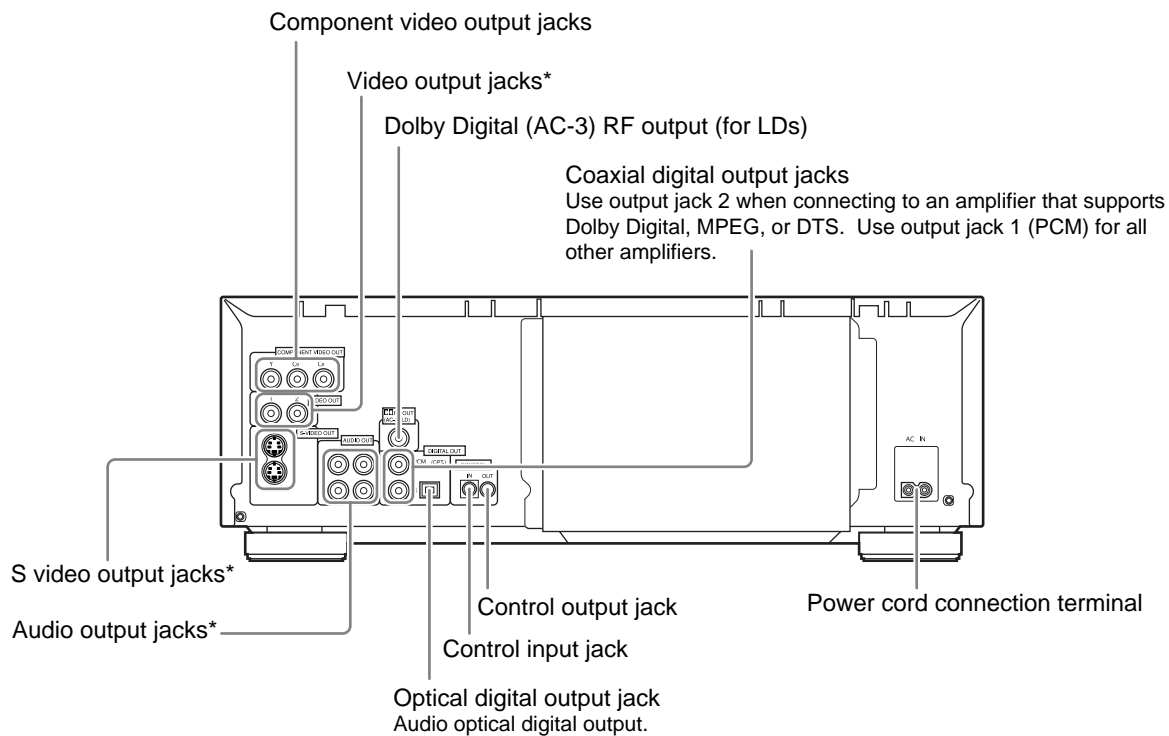

* There are two pairs of outputs, numbered 1 and 2, which can be connected at the same time. Connect jack 1 to a TV and jack 2 to an AV amplifier, for example.

■ REMOTE CONTROL

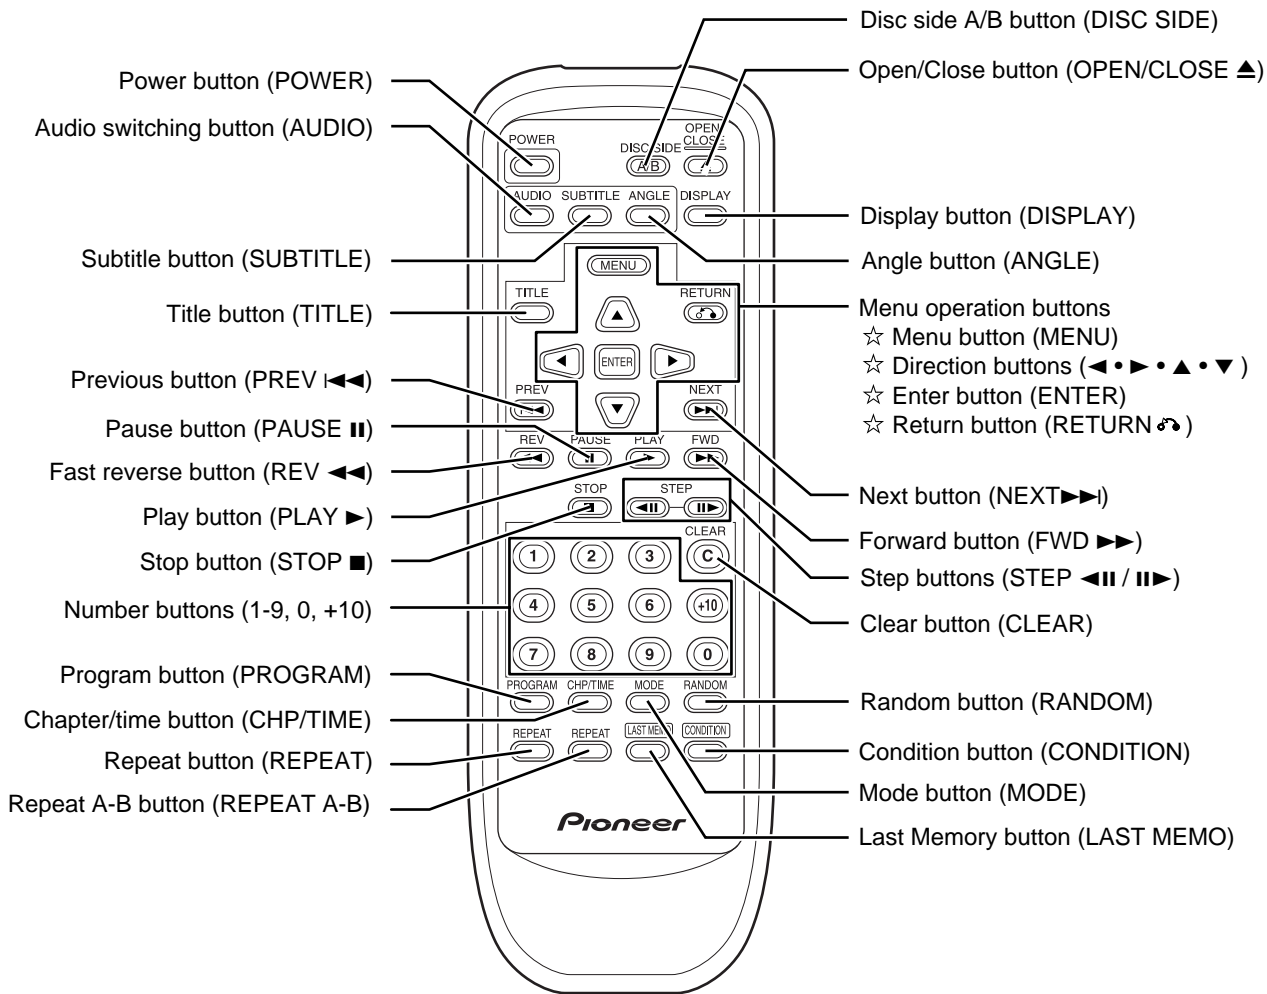

Buttons ilisted with ☆ mark are used for menu operation.

Remote control operation

When operating the remote control, point it at the remote sensor located on the player's front panel. The remote control can be used up to 23 feet (7 m) from the player and within a 30° angle from the middle of the sensor.

- Exposing the remote sensor to direct sunlight or strong light may cause faulty operation.
- If the CONTROL IN jack on the player's rear panel is connected to another component, point the remote control at that component to operate the player. The remote control will not work in this case when pointed at the player.

■ SPECIFICATIONS

General

System DVD system, LaserVision Disc system and Compact Disc digital audio system
 Power requirements AC 120 V, 60 Hz
 Power consumption 48 W
 Power consumption in standby mode 5.1 W
 Weight 8.4 kg (18 lb 9 oz)
 Dimensions 420 (W) x 462 (D) x 146 (H) mm
 (16 ⁹/₁₆ x 18 ³/₁₆ x 5 ³/₄ in.)
 (Not including protruding cables, etc.)
 Operating temperature +5°C to +35°C (+36°F to +96°F)
 Operating humidity 5% to 85% (no condensation)

S-Video Output (2 pairs)

Y (luminance) - Output level 1 Vp-p (75 Ω)
 C (color) - Output level 286 mVp-p (75 Ω)
 Jacks S-VIDEO jack

Video Output (2 pairs)

Output level 1 Vp-p (75 Ω)
 Jacks RCA jacks

Component Video Output

(Y, C_B, C_R)
 Output level Y: 1.0 Vp-p (75 Ω)
 C_B, C_R: 0.7 Vp-p (75 Ω)
 Jacks RCA jacks

Audio Output (2 pairs)

Output level
 During audio output 200 mVrms (1 kHz, -20 dB)
 Number of channels 2
 Jacks RCA jacks

Digital audio characteristics (DVD fs=96kHz/24 bit)

Frequency response	4 Hz to 44 kHz (DVD fs: 96 kHz) 4 Hz to 20 kHz (LD, CD)
S/N ratio	115 dB
Dynamic range	103 dB
Total harmonic distortion	0.002 %
Wow and flutter	Limit of measurement (±0.001% W. PEAK) or lower

Other Terminals

Optical digital output (AC-3/PCM) Optical digital jack
 Coaxial digital output (AC-3/PCM) RCA jack
 Coaxial digital output (PCM) RCA jack
 AC-3 RF output (for LD) RCA jack
 CONTROL IN Minijack (3.5ø)
 CONTROL OUT Minijack (3.5ø)

Accessories

Remote control unit 1
 AA (R6P) dry cell batteries 2
 Audio cord 1
 Video cord 1
 Power cord 1
 Operating Instructions 1
 Warranty card 1


NOTE:

The specifications and design of this product are subject to change without notice, due to improvement.


Manufactured under license from Dolby Laboratories. "Dolby", "AC-3" and the double-D symbol are trademarks of Dolby Laboratories. Confidential Unpublished Works, © 1992-1997 Dolby Laboratories, Inc. All rights reserved.

■ ACCESSORIES


Audio cord
 VDE1033 (L=1.5m)

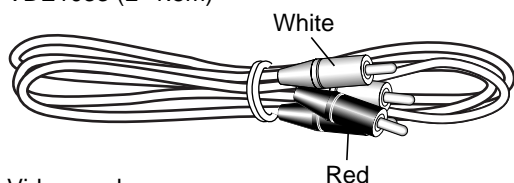


Video cord
 VDE1036 (L=1.5m)

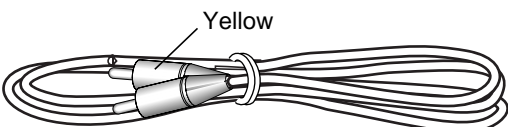


Power cord
 ADG7021 (KU/CA type)
 ADG7003 (RD/RA type)



Remote control unit
 VXX2609 (CU-DV030)

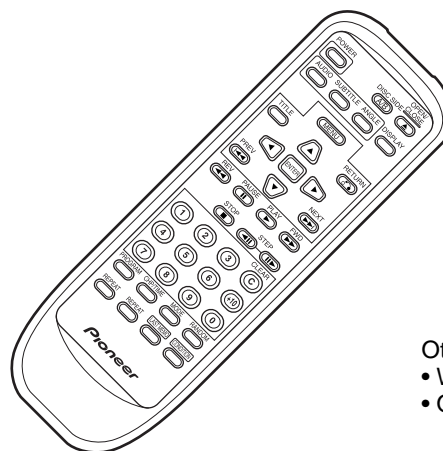

Batteries(AA/R6P).....2



Other included items:
 • Warranty card
 • Operating instructions